
NERI

Project location:	Fixture type: Qty:
Project name:	Notes:

ORIGO | LUMINAIRE | ORIGO STAINLESS 150



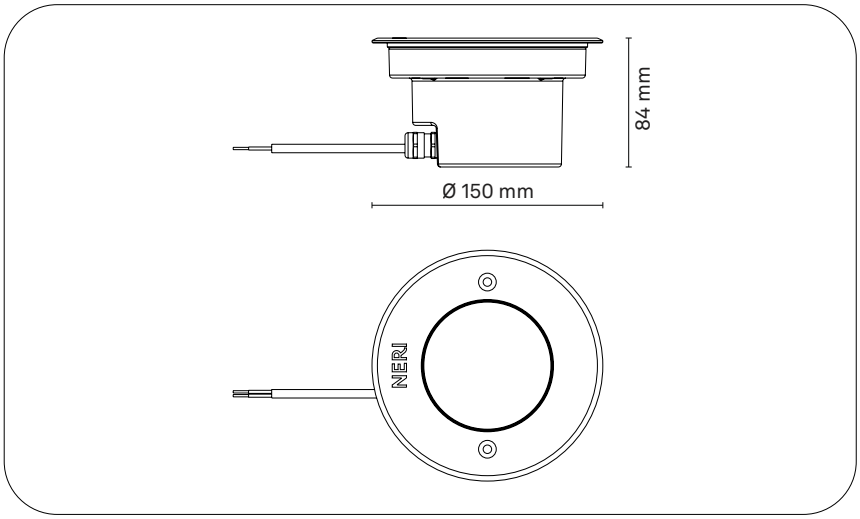

CE IP66 IP68 IK10 Classe II

ORDERING INFORMATION / GUIDE

Example**: LUORI01-N-D86-830-L008-ST-V1-F05-M2-CS1**

OPTIQUE	RA+K	LUMINOUS FLUX	SCREEN FINISH	POWER SUPPLY	DRIVER FUNCTION	ISO CLASS	FINISH
D82 Spot	**827** Ra80 2700 K	**L006** 600 lm	**ST** Transparent	**V1** 220V-240V	**F52** PWM	**M2** Class II	**CS1** Ring - Stainless Steel
D83 Flood	**830** Ra80 3000 K	**L007** 700 lm		**V4** 24Vdc	**F05** DALI	**M3** Class III	**CO1** Ring - Brass
D87 Medium Wide Flood	**840** Ra80 4000 K	**L008** 800 lm			**F47** TRIAC		
D84 Medium Wide Flood		**L009** 900 lm					
D85 Spot							
D86 Flood							

Generated code: **LUORI01 - N** - _ _ _ - _ _ _ - _ _ _ _ - _ _ - _ _ - _ _ _ - _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ORIGO | LUMINAIRE | ORIGO STAINLESS 150

SOURCE
High-power LED matrix.

Energy-efficiency class: E
LED forward current: 500 mA
Power rating: 7.9 W
Nominal Flux: 610-920 lm
Nominal CCT (Colour temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L80B10 50000 h @ Tq = 25 °C

LIGHTING CHARACTERISTICS
PMMA TIR refractive lenses.

Optique: Spot, Flood, Medium Wide Flood
Optical efficiency: LOR = 100% ULOR = 100%
LED quantity: 6
Cutoff Angle: Non Cutoff C = 0° γ = 174, 180°
Luminous flux: 610-920 lm
Luminous efficacy: 60-90 lm/W
IPEA: Road N.A. / N.A., Urban N.A. / N.A., Ped N.A. / N.A., Park N.A. / N.A., Art N.A. / N.A.
BUG: B=0, U=4, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Installation is carried out using the dedicated installation housing, ensuring proper drainage and waterproofing of the system.
Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778.

Luminaire power: 10.2 W
Power supply: 220V-240V~ 50/60Hz, 24Vdc
Power factor: ≥0.9
Insulation class: Class II, Class III
Control type - driver: PWM, DALI, TRIAC
Ambient temperature: -35 °C / +50 °C
Cable type: H05RN-F 2X1mm²
Cable length: 1 m, 5 m
Surge protection: 2kV CM - 2kV DM

MECHANICAL CHARACTERISTICS
Housing consisting of a body and front closing ring in AISI 316L stainless steel, with a transparent extra-clear tempered glass protective cover, impact-resistant to IK10 (EN 62262).
IP66-IP68 protection rating.
Stainless steel screws; power supply cable included (H05RN-F).

Diameter: 1500 mm
Height: 840 mm
Weight: 4 kg
Protection degree: IP66 / IP68
Mechanical resistance: IK10
Finish: Ring - Stainless Steel, Ring - Brass

INSTALLATION
The luminaire can be installed using two different types of recessed housings, available in different shapes and sizes: cylindrical and square.
The recessed housings must be secured in the ground with concrete beforehand and perfectly level with the finished paving.


WARNINGS
Protection of surfaces: please refer to the specification on painting procedures of the materials.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ORIGO | LUMINAIRE | ORIGO STAINLESS 150

Optic: Spot


Screen finish: Transparent



H [m]	D [m]	Emax [lx]
	10	
1	0.17	0
2	0.35	0
3	0.52	0
4	0.7	0
5	0.87	0

Optic: Flood


Screen finish: Transparent



H [m]	D [m]	Emax [lx]
	23	
1	0.41	0
2	0.81	0
3	1.22	0
4	1.63	0
5	2.03	0

Optic: Medium Wide Flood


Screen finish: Transparent



H [m]	D [m]	Emax [lx]
	42	
1	0.77	0
2	1.54	0
3	2.3	0
4	3.07	0
5	3.84	0

Optic: Medium Wide Flood


Screen finish: Transparent



H [m]	D [m]	Emax [lx]
	44	
1	0.81	0
2	1.62	0
3	2.42	0
4	3.23	0
5	4.04	0

Optic: Spot


Screen finish: Transparent



H [m]	D [m]	Emax [lx]
	11	
1	0.19	0
2	0.39	0
3	0.58	0
4	0.77	0
5	0.96	0

Optic: Flood

Screen finish: Transparent



H [m]	D [m]	Emax [lx]
	22	
1	0.39	0
2	0.78	0
3	1.17	0
4	1.56	0
5	1.94	0

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ORIGO | LUMINAIRE | ORIGO STAINLESS 150

Optic: Spot

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
790 lm	2700 K	10.2	77	6	500	7.9	100	N.A.	N.A.	N.A.	N.A.	N.A.
790 lm	3000 K	10.2	77	6	500	7.9	100	N.A.	N.A.	N.A.	N.A.	N.A.
850 lm	4000 K	10.2	83	6	500	7.9	108	N.A.	N.A.	N.A.	N.A.	N.A.

Optic: Flood

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
860 lm	2700 K	10.2	84	6	500	7.9	109	N.A.	N.A.	N.A.	N.A.	N.A.
860 lm	3000 K	10.2	84	6	500	7.9	109	N.A.	N.A.	N.A.	N.A.	N.A.
920 lm	4000 K	10.2	90	6	500	7.9	116	N.A.	N.A.	N.A.	N.A.	N.A.

Optic: Medium Wide Flood

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
610 lm	2700 K	10.2	60	6	500	7.9	77	N.A.	N.A.	N.A.	N.A.	N.A.
610 lm	3000 K	10.2	60	6	500	7.9	77	N.A.	N.A.	N.A.	N.A.	N.A.
650 lm	4000 K	10.2	64	6	500	7.9	82	N.A.	N.A.	N.A.	N.A.	N.A.

Optic: Medium Wide Flood

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
750 lm	2700 K	10.2	74	6	500	7.9	95	N.A.	N.A.	N.A.	N.A.	N.A.
750 lm	3000 K	10.2	74	6	500	7.9	95	N.A.	N.A.	N.A.	N.A.	N.A.
810 lm	4000 K	10.2	79	6	500	7.9	103	N.A.	N.A.	N.A.	N.A.	N.A.

Optic: Spot

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
720 lm	2700 K	10.2	71	6	500	7.9	91	N.A.	N.A.	N.A.	N.A.	N.A.
720 lm	3000 K	10.2	71	6	500	7.9	91	N.A.	N.A.	N.A.	N.A.	N.A.
770 lm	4000 K	10.2	75	6	500	7.9	97	N.A.	N.A.	N.A.	N.A.	N.A.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ORIGO | LUMINAIRE | ORIGO STAINLESS 150

Optic: Flood

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
760 lm	2700 K	10.2	75	6	500	7.9	96	N.A.	N.A.	N.A.	N.A.	N.A.
760 lm	3000 K	10.2	75	6	500	7.9	96	N.A.	N.A.	N.A.	N.A.	N.A.
820 lm	4000 K	10.2	80	6	500	7.9	104	N.A.	N.A.	N.A.	N.A.	N.A.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.