

Project location:


Project name:

Fixture type:

Qty:

Notes:

Flush | Pole | Steel | Round step | Max 3 light sources

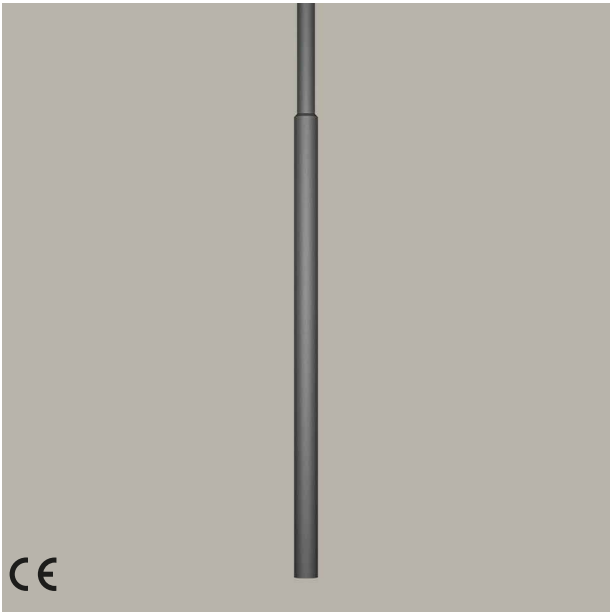

Ordering Information / Guide

Example: **FL1119205-N-BF-EPR-GF2-HC0610-ZD127102-CNO**

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BF Flanged	EPR Tapered	GF2 Post top Max 2 light sources	HC0410 161.417 in	ZD102076 Base 4.016 - Top 2.992 in	CNO Grey [Neri] Textured
			HC0510 200.788 in	ZD102089 Base 4.016 - Top 3.504 in	
			HC0610 240.158 in	ZD127102 Base 5 - Top 4.016 in	
			HC0710 279.528 in		
			HC0810 318.898 in		

Generated code: **FL1119205 - N** - _ _ - _ _ - _ _ _ _ _ - _ _ _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Flush | Pole | Steel | Round step | Max 3 light sources

MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

Section	Base/Top 4.016/2.992 in, 4.016/3.504 in, 5/4.016 in
Hatch size	13.78x2.835 in, 15.748x3.543 in
Weight	78.93-183.42 lb
Finish	Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting
procedures of the materials.