

NERI

Project location:		Fixture type:	Qty:
Project name:		Notes:	

MATAR | LUMINAIRE

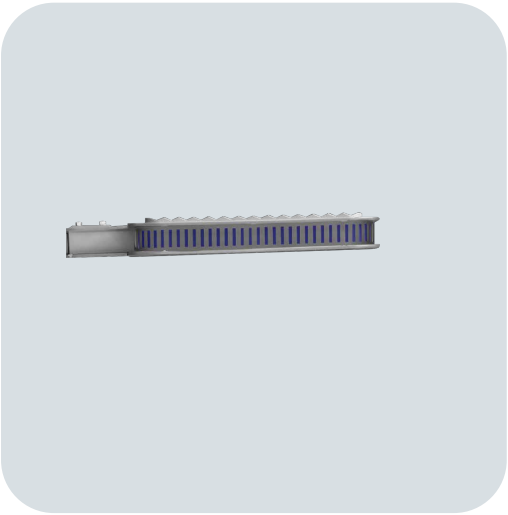

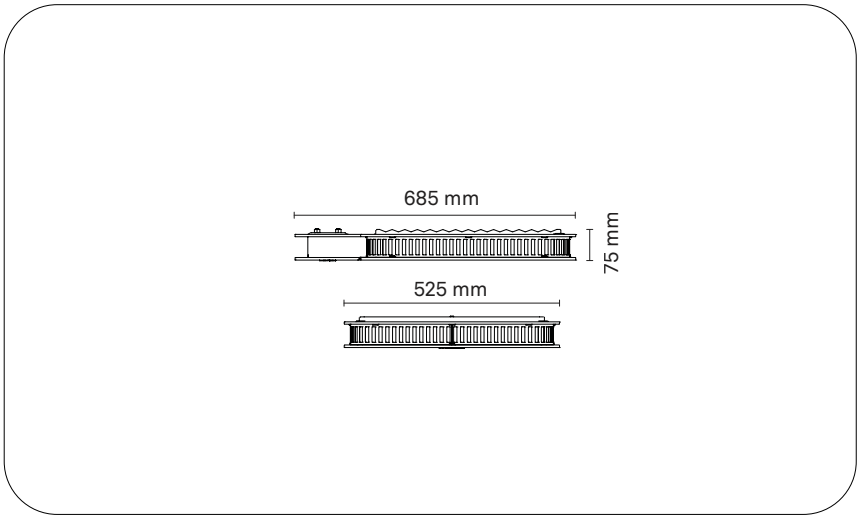

CE IP65 IK09 Classe II

ORDERING INFORMATION / GUIDE

Example**: MNMAT-N-D20-730-L090-ST-V1-F02-M2-CN0**

OPTIQUE	RA+K	LUMINOUS FLUX	SCREEN FINISH	POWER SUPPLY	DRIVER FUNCTION	ISO CLASS	FINISH
D28 Type I - Center road	**730** Ra70 3000 K	**L060** 6000 lm	**ST** Transparent	**V1** 220V-240V	**F02** 1-10V+CLO	**M2** Class II	**CN0** Grey [Neri] Textured
D20 Type II - A	**740** Ra70 4000 K	**L090** 9000 lm			**F06** DALI+CLO		
D21 Type II - A		**L135** 13500 lm			**F04** Ampdim+CLO		
D24 Type IV - Forward throw		**L180** 18000 lm			**F14** NVL6H+CLO		
D17 Type IV - B							
D30 Type V - Rotosymmetric							

Generated code: **MNMAT - N** - _ _ _ - _ _ _ - _ _ _ _ - _ _ - _ _ - _ _ _ - _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

MATAR | LUMINAIRE

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 609-730 mA
Power rating: 64-132 W
Nominal Flux: 6000-18000 lm
Nominal CCT (Colour temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5
Rated lifetime: L90B10 100000 h @ Tq = 25 °C

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optique: Type I - Center road, Type II - A, Type IV - Forward throw, Type IV - B, Type V - Rotosymmetric
Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 32, 48, 64
Cutoff Angle: Cutoff, Semi Cutoff C = 10, 55° γ = 54, 74°
Luminous flux: 6000-18000 lm
Luminous efficacy: 79-130 lm/W
Luminous intensity class: G*1, G*3, G*4, G*6
IPEA: Road B / A4+, Urban A+ / A7+, Ped C / A4+, Park C / A4+, Art A++ / A9+
BUG: B=1-4, U=0, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778. ENEC safety mark.

Luminaire power: 71-144 W
Power supply: 220V-240V~ 50/60Hz
Insulation class: Class II
Control type - driver: 1-10V+CLO, DALI+CLO, Ampdim+CLO, NVL6H+CLO
Ambient temperature: -35 °C / +50 °C
Driver included: No

MECHANICAL CHARACTERISTICS
Structure made of cast and sheet aluminium (UNI EN 1706) with a perimeter band in sheet metal and a tilting lower frame for access to the auxiliary and optical compartment.
Screen in extra-clear transparent screen-printed glass with silicone gasket between the upper and lower frames.
Stainless steel screws.

Length: 685 mm
Width: 525 mm
Height: 75 mm
Weight: 16 kg
Wind-exposed area: 0.04 m²
Protection degree: IP65
Mechanical resistance: IK09
Finish: Grey [Neri] Textured

INSTALLATION
Side mounting on tips and poles of the Matar system, with Ø 48 mm tubes.


WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.


Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

MATAR | LUMINAIRE

Optic: Type I - Center road


Screen finish: Transparent






Optic: Type II - A


Screen finish: Transparent






Optic: Type II - A


Screen finish: Transparent






Optic: Type IV - Forward throw


Screen finish: Transparent






Optic: Type IV - B


Screen finish: Transparent






Optic: Type V - Rotosymmetric

Screen finish: Transparent





Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

MATAR | LUMINAIRE

Optic: Type I - Center road

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
6000 lm	4000 K	71	85	32	667	64	94	A	A+	B	B	A3+
9000 lm	3000 K	76	118	32	720	68	132	A4+	A5+	A3+	A3+	A8+
13500 lm	3000 K	108	125	48	635	99	136	A4+	A6+	A3+	A3+	A8+
13500 lm	4000 K	104	130	48	706	95	142	A4+	A7+	A4+	A4+	A8+
18000 lm	3000 K	144	125	64	609	132	136	A++	A6+	A3+	A3+	A8+
18000 lm	4000 K	138	130	64	730	127	142	A3+	A7+	A3+	A3+	A9+

Optic: Type II - A

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
6000 lm	4000 K	71	85	32	667	64	94	A	A+	B	B	A3+
9000 lm	3000 K	76	118	32	720	68	132	A4+	A5+	A3+	A3+	A8+
13500 lm	3000 K	108	125	48	635	99	136	A4+	A6+	A3+	A3+	A8+
13500 lm	4000 K	104	130	48	706	95	142	A4+	A7+	A4+	A4+	A8+
18000 lm	3000 K	144	125	64	609	132	136	A++	A6+	A3+	A3+	A8+
18000 lm	4000 K	138	130	64	730	127	142	A3+	A7+	A3+	A3+	A9+

Optic: Type II - A

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
6000 lm	4000 K	71	85	32	667	64	94	A	A+	B	B	A3+
9000 lm	3000 K	76	118	32	720	68	132	A4+	A5+	A3+	A3+	A8+
13500 lm	3000 K	108	125	48	635	99	136	A4+	A6+	A3+	A3+	A8+
13500 lm	4000 K	104	130	48	706	95	142	A4+	A7+	A4+	A4+	A8+
18000 lm	3000 K	144	125	64	609	132	136	A++	A6+	A3+	A3+	A8+
18000 lm	4000 K	138	130	64	730	127	142	A3+	A7+	A3+	A3+	A9+

Optic: Type IV - Forward throw

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
6000 lm	4000 K	71	85	32	667	64	94	A	A+	B	B	A3+
9000 lm	3000 K	76	118	32	720	68	132	A4+	A5+	A3+	A3+	A8+
13500 lm	3000 K	108	125	48	635	99	136	A4+	A6+	A3+	A3+	A8+
13500 lm	4000 K	104	130	48	706	95	142	A4+	A7+	A4+	A4+	A8+
18000 lm	3000 K	144	125	64	609	132	136	A++	A6+	A3+	A3+	A8+
18000 lm	4000 K	138	130	64	730	127	142	A3+	A7+	A3+	A3+	A9+

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

MATAR | LUMINAIRE

Optic: Type IV - B

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
6000 lm	3000 K	76	79	32	720	68	88	B	A	C	C	A++
6000 lm	4000 K	71	85	32	667	64	94	A	A+	B	B	A3+
13500 lm	3000 K	108	125	48	635	99	136	A4+	A6+	A3+	A3+	A8+
13500 lm	4000 K	104	130	48	706	95	142	A4+	A7+	A4+	A4+	A8+
18000 lm	3000 K	144	125	64	609	132	136	A++	A6+	A3+	A3+	A8+
18000 lm	4000 K	138	130	64	730	127	142	A3+	A7+	A3+	A3+	A9+

Optic: Type V - Rotosymmetric

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Road**	**Urban**	**Ped**	**Park**	**Art**
6000 lm	4000 K	71	85	32	667	64	94	A	A+	B	B	A3+
9000 lm	3000 K	76	118	32	720	68	132	A4+	A5+	A3+	A3+	A8+
13500 lm	3000 K	108	125	48	635	99	136	A4+	A6+	A3+	A3+	A8+
13500 lm	4000 K	104	130	48	706	95	142	A4+	A7+	A4+	A4+	A8+
18000 lm	3000 K	144	125	64	609	132	136	A++	A6+	A3+	A3+	A8+
18000 lm	4000 K	138	130	64	730	127	142	A3+	A7+	A3+	A3+	A9+

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.