



Brenta Pathlight | Luminaire | Brenta S

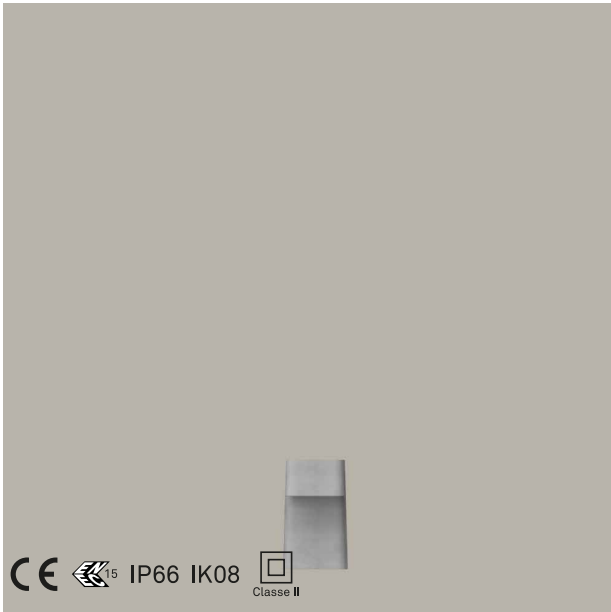

Ordering Information / Guide Example: **BR2960007-N-D20-830-L010-SP-V1-F02-M2-CG0**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D20 Type II - A	830 Ra80 3000 K	L010 1000 lm	SP Prismatic	V1 220V-240V	F02 1-10V+CL0	M2 Class II	CG0 Grey [RAL 9006] Matt
	840 Ra80 4000 K	L011 1100 lm					

Generated code: **BR2960007 - N** - _ _ _ _ _

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Brenta Pathlight | Luminaire | Brenta S

SOURCE

High-power LED matrix.	
Energy-efficiency class	E
LED forward current	450 mA
Power rating	11 W
Nominal Flux	1000-1050 lm
Nominal CCT (Colour temperature)	3000 K, 4000 K
Color Rendering Index (Ra)	80
Standard Deviation Colour Matching	≤3
Rated lifetime	L90B10 100000 h @ Tq = 25 °C

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.	
Optique	Type II - A
Optical efficiency	LOR = 100% ULOR = 0%
LED quantity	2
Cutoff Angle	Semi Cutoff C = 45° γ = 32°
Luminous flux	1000-1050 lm
Luminous efficacy	77-81 lm/W
Luminous intensity class	G*6
IPEA	Road B / A, Urban B / A, Ped B / B, Park B / B, Art A++ / A+
BUG	B=0, U=0, G=1
Photobiological safety	RG1 - Low risk

ELECTRICAL CHARACTERISTICS

Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778. ENEC safety mark.	
Luminaire power	13 W
Power supply	220V-240V~ 50/60Hz
Insulation class	Class II
Control type - driver	1-10V+CLO
Ambient temperature	-35 °C / +50 °C
Driver included	No

MECHANICAL CHARACTERISTICS

Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.	
NeriConcrete is a flexible paste made by blending cement powders and components, polymer fibres, coloured pigments, and water, adaptable to any mould.	
Protective screen in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.	
The surface treatment makes the material water-repellent and stain-resistant.	
Length	239 mm
Width	165 mm
Height	300 mm
Weight	11 kg
Wind-exposed area	0.05 m²
Protection degree	IP66
Mechanical resistance	IK08
Finish	Grey [RAL 9006] Matt


WARNINGS

Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.

Brenta Pathlight | Luminaire | Brenta S

Optic: Type II - A

Screen finish: Prismatic

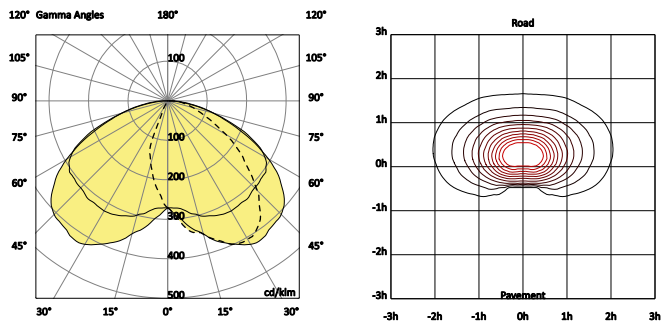

Brenta Pathlight | Luminaire | Brenta S

Optic: Type II - A

Screen finish: Prismatic

System					Source			IPEA				
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Road	Urban	Ped	Park	Art
1000 lm	3000 K	13	77	2	450	11	91	B	B	B	B	A+
1050 lm	4000 K	13	81	2	450	11	95	A	A	B	B	A++