


Light 21 | Luminaire | Post top entry

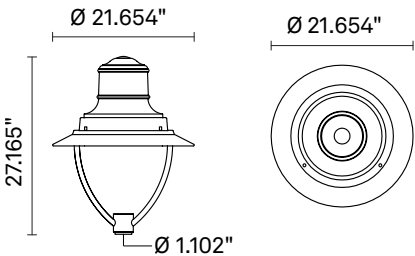

Ordering Information / Guide

Example: LU21000-U-D28-822-L025-SP-V0-F35-MU-CNO

Optics	Ra+K	Luminous flux	Lens	Voltage	Driver Function	ISO Class	Finish
D28 T1 short	822 Ra80 2200 K	L025 2500 lm	SP Prismatic	V0 120V-277V	F35 0-10V+CLO	MU UL	CNO Grey [Neri] Textured
D36 T2 medium	827 Ra80 2700 K	L035 3500 lm					
D22 T3 narrow	830 Ra80 3000 K	L045 4500 lm					
D25 T2 narrow	840 Ra80 4000 K	L060 6000 lm					
D37 T3 medium		L075 7500 lm					
D24 T4 wide		L090 9000 lm					
D38 T4 medium		L105 10500 lm					
D30 T5 square medium		L120 12000 lm					
		L135 13500 lm					

Generated code: LU21000 - U - _ _ _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Light 21 | Luminaire | Post top entry

SOURCE

High-power LED matrix.	D, E
Energy-efficiency class	334-862 mA
LED forward current	14.4-93.8 W
Power rating	2500-13500 lm
Nominal Flux	2200 K, 2700 K, 3000 K, 4000 K
Nominal CCT (Color temperature)	80
Color Rendering Index (Ra)	≤5
Standard Deviation Colour Matching	Rf = 83-86 Rg = 95-96
ANSI/IES TM-30	L90 = 100000 h (Ts = 85 °C, 700 mA)
Rated lifetime	

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.	T1 short, T2 medium, T3 narrow,
Optics	T2 narrow, T3 medium, T4 wide,
	T4 medium, T5 square medium
	LOR = 100% ULOR = 0%
Optical efficiency	16, 24, 32, 48
LED quantity	Semi Cutoff C = 5, 50° γ = 44, 54°
Cutoff Angle	2500-13500 lm
Luminous flux	110-144 lm/W
Luminous efficacy	B=1-3, U=0, G=1-3
BUG	RG1 - Low risk
Photobiological safety	

ELECTRICAL CHARACTERISTICS

Luminaire power	17.4-105 W
Voltage	120V-277V- 50/60Hz
Power factor	≥0.99
Insulation class	UL
Control type - driver	0-10V+CLO
Safe Flicker	PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature	-40 °F / +122 °F
Driver included	Yes
Surge protection	20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS

Structure made of die-cast and sheet aluminum (UNI EN 1706) with an upper frame equipped with a G3/4" threaded connection for mounting to the support, and a lower tilting die-cast frame for access to the auxiliary compartment.	
Protective shield made of extra-clear tempered glass, internal reflector, and EPDM gasket between the glass and reflector.	
Compartment prepared for additional surge protectors or remote monitoring systems, with stainless steel fastening elements and hot-dip galvanized steel supports.	
Diameter	21.654 in
Height	27.165 in
Weight	24.03 lb
EPA	0.54 ft²
Protection degree	IP66
Mechanical resistance	IK10
Finish	Grey [Neri] Textured

INSTALLATION

Pole-top: flange with a Ø 1-1/8" central hole for fastening to the support.


WARNINGS

Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.

Light 21 | Luminaire | Post top entry


Optic: T1 short

Lens: Prismatic

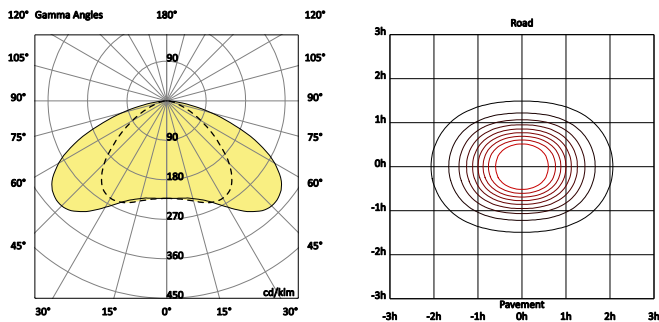


Optic: T2 medium

Lens: Prismatic

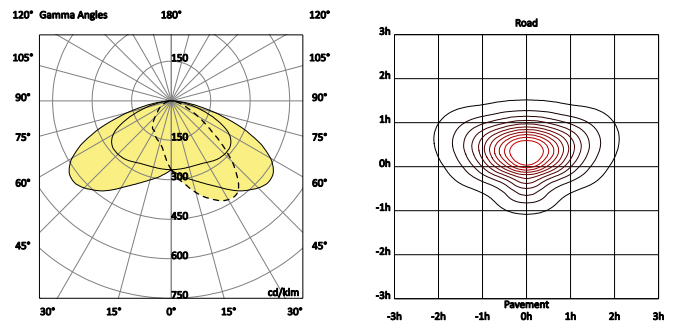


Optic: T3 narrow

Lens: Prismatic

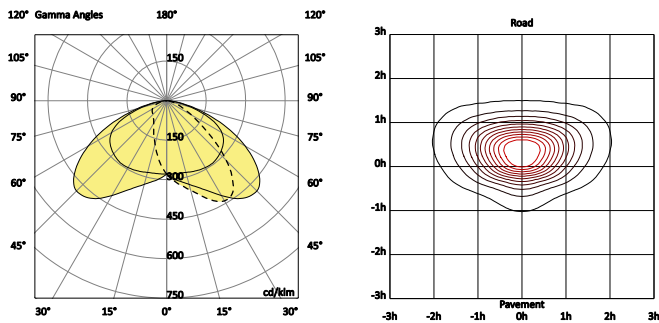


Optic: T2 narrow

Lens: Prismatic

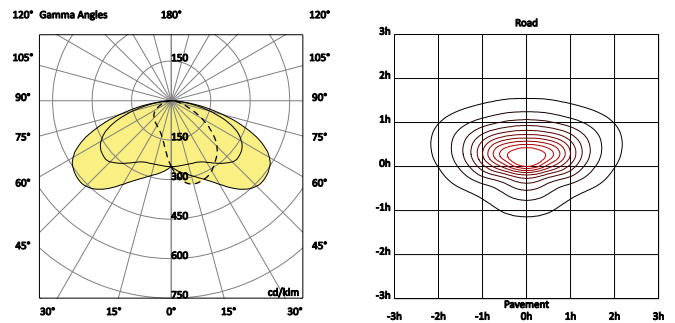


Optic: T3 medium

Lens: Prismatic

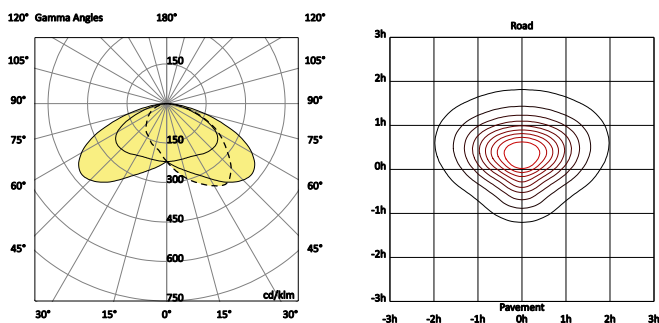


Optic: T4 wide

Lens: Prismatic

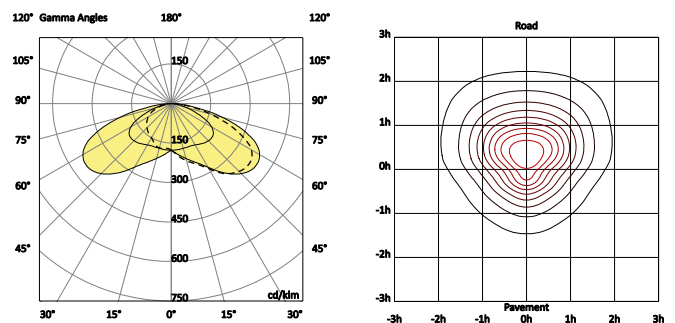


Optic: T4 medium

Lens: Prismatic

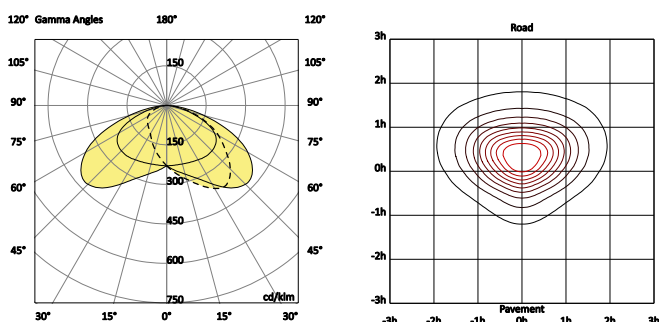

Optic: T5 square medium

Lens: Prismatic

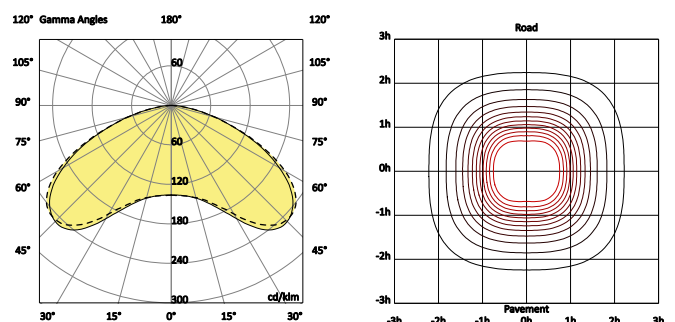

Light 21 | Luminaire | Post top entry

Optic: T1 short

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	2	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	2	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	2	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	2	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	2	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	2	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	2	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	2	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	2	0	2
6000 lm	2700 K	48.3	124	24	614	40.9	147	2	0	2
6000 lm	3000 K	45.9	131	24	582	38.7	155	2	0	2
6000 lm	4000 K	43.5	138	24	550	36.5	164	2	0	2
7500 lm	2200 K	65.5	115	32	638	56.7	132	2	0	2
7500 lm	2700 K	61.6	122	24	786	53.1	141	2	0	2
7500 lm	3000 K	58.4	128	24	744	50.1	150	2	0	2
7500 lm	4000 K	55.2	136	24	704	47.2	159	2	0	2
9000 lm	2200 K	79.9	113	32	780	70.2	128	3	0	2
9000 lm	2700 K	71.8	125	32	698	62.6	144	3	0	2
9000 lm	3000 K	68.1	132	32	662	59.1	152	3	0	2
9000 lm	4000 K	64.4	140	32	626	55.7	162	3	0	2
10500 lm	2200 K	88.8	118	48	590	78.6	134	3	0	3
10500 lm	2700 K	85.1	123	32	830	75.1	140	3	0	3
10500 lm	3000 K	80.5	130	32	786	70.8	148	3	0	3
10500 lm	4000 K	76.1	138	32	742	66.7	157	3	0	3
12000 lm	2200 K	102.7	117	48	684	91.7	131	3	0	3
12000 lm	2700 K	92.3	130	48	614	81.9	147	3	0	3
12000 lm	3000 K	87.6	137	48	582	77.4	155	3	0	3
12000 lm	4000 K	88.2	136	32	862	78.1	154	3	0	3
13500 lm	2700 K	105	129	48	698	93.8	144	3	0	3
13500 lm	3000 K	99.4	136	48	662	88.6	152	3	0	3
13500 lm	4000 K	94.1	143	48	626	83.6	161	3	0	3

Light 21 | Luminaire | Post top entry

Optic: T2 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	1	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	1	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	1	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	1	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	1	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	1	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	1	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	1	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	1	0	1
6000 lm	2700 K	48.3	124	24	614	40.9	147	1	0	1
6000 lm	3000 K	45.9	131	24	582	38.7	155	1	0	1
6000 lm	4000 K	43.5	138	24	550	36.5	164	1	0	1
7500 lm	2200 K	65.5	115	32	638	56.7	132	2	0	1
7500 lm	2700 K	61.6	122	24	786	53.1	141	2	0	1
7500 lm	3000 K	58.4	128	24	744	50.1	150	2	0	1
7500 lm	4000 K	55.2	136	24	704	47.2	159	2	0	1
9000 lm	2200 K	79.9	113	32	780	70.2	128	2	0	1
9000 lm	2700 K	71.8	125	32	698	62.6	144	2	0	1
9000 lm	3000 K	68.1	132	32	662	59.1	152	2	0	1
9000 lm	4000 K	64.4	140	32	626	55.7	162	2	0	1
10500 lm	2200 K	88.8	118	48	590	78.6	134	2	0	2
10500 lm	2700 K	85.1	123	32	830	75.1	140	2	0	2
10500 lm	3000 K	80.5	130	32	786	70.8	148	2	0	2
10500 lm	4000 K	76.1	138	32	742	66.7	157	2	0	2
12000 lm	2200 K	102.7	117	48	684	91.7	131	2	0	2
12000 lm	2700 K	92.3	130	48	614	81.9	147	2	0	2
12000 lm	3000 K	87.6	137	48	582	77.4	155	2	0	2
12000 lm	4000 K	88.2	136	32	862	78.1	154	2	0	2
13500 lm	2700 K	105	129	48	698	93.8	144	3	0	2
13500 lm	3000 K	99.4	136	48	662	88.6	152	3	0	2
13500 lm	4000 K	94.1	143	48	626	83.6	161	3	0	2

Light 21 | Luminaire | Post top entry

Optic: T3 narrow

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	1	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	1	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	1	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	1	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	1	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	1	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	1	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	1	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	1	0	1
6000 lm	2700 K	48.3	124	24	614	40.9	147	1	0	1
6000 lm	3000 K	45.9	131	24	582	38.7	155	1	0	1
6000 lm	4000 K	43.5	138	24	550	36.5	164	1	0	1
7500 lm	2200 K	65.5	115	32	638	56.7	132	2	0	1
7500 lm	2700 K	61.6	122	24	786	53.1	141	2	0	1
7500 lm	3000 K	58.4	128	24	744	50.1	150	2	0	1
7500 lm	4000 K	55.2	136	24	704	47.2	159	2	0	1
9000 lm	2200 K	79.9	113	32	780	70.2	128	2	0	1
9000 lm	2700 K	71.8	125	32	698	62.6	144	2	0	1
9000 lm	3000 K	68.1	132	32	662	59.1	152	2	0	1
9000 lm	4000 K	64.4	140	32	626	55.7	162	2	0	1
10500 lm	2200 K	88.8	118	48	590	78.6	134	2	0	2
10500 lm	2700 K	85.1	123	32	830	75.1	140	2	0	2
10500 lm	3000 K	80.5	130	32	786	70.8	148	2	0	2
10500 lm	4000 K	76.1	138	32	742	66.7	157	2	0	2
12000 lm	2200 K	102.7	117	48	684	91.7	131	2	0	2
12000 lm	2700 K	92.3	130	48	614	81.9	147	2	0	2
12000 lm	3000 K	87.6	137	48	582	77.4	155	2	0	2
12000 lm	4000 K	88.2	136	32	862	78.1	154	2	0	2
13500 lm	2700 K	105	129	48	698	93.8	144	3	0	2
13500 lm	3000 K	99.4	136	48	662	88.6	152	3	0	2
13500 lm	4000 K	94.1	143	48	626	83.6	161	3	0	2

Light 21 | Luminaire | Post top entry

Optic: T2 narrow

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	1	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	1	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	1	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	1	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	1	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	1	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	1	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	1	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	1	0	1
6000 lm	2700 K	48.3	124	24	614	40.9	147	1	0	1
6000 lm	3000 K	45.9	131	24	582	38.7	155	1	0	1
6000 lm	4000 K	43.5	138	24	550	36.5	164	1	0	1
7500 lm	2200 K	65.5	115	32	638	56.7	132	2	0	2
7500 lm	2700 K	61.6	122	24	786	53.1	141	2	0	2
7500 lm	3000 K	58.4	128	24	744	50.1	150	2	0	2
7500 lm	4000 K	55.2	136	24	704	47.2	159	2	0	2
9000 lm	2200 K	79.9	113	32	780	70.2	128	2	0	2
9000 lm	2700 K	71.8	125	32	698	62.6	144	2	0	2
9000 lm	3000 K	68.1	132	32	662	59.1	152	2	0	2
9000 lm	4000 K	64.4	140	32	626	55.7	162	2	0	2
10500 lm	2200 K	88.8	118	48	590	78.6	134	2	0	2
10500 lm	2700 K	85.1	123	32	830	75.1	140	2	0	2
10500 lm	3000 K	80.5	130	32	786	70.8	148	2	0	2
10500 lm	4000 K	76.1	138	32	742	66.7	157	2	0	2
12000 lm	2200 K	102.7	117	48	684	91.7	131	2	0	2
12000 lm	2700 K	92.3	130	48	614	81.9	147	2	0	2
12000 lm	3000 K	87.6	137	48	582	77.4	155	2	0	2
12000 lm	4000 K	88.2	136	32	862	78.1	154	2	0	2
13500 lm	2700 K	105	129	48	698	93.8	144	2	0	2
13500 lm	3000 K	99.4	136	48	662	88.6	152	2	0	2
13500 lm	4000 K	94.1	143	48	626	83.6	161	2	0	2

Light 21 | Luminaire | Post top entry

Optic: T3 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	1	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	1	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	1	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	1	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	1	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	1	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	1	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	1	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	1	0	1
6000 lm	2700 K	48.3	124	24	614	40.9	147	1	0	1
6000 lm	3000 K	45.9	131	24	582	38.7	155	1	0	1
6000 lm	4000 K	43.5	138	24	550	36.5	164	1	0	1
7500 lm	2200 K	65.5	115	32	638	56.7	132	2	0	2
7500 lm	2700 K	61.6	122	24	786	53.1	141	2	0	2
7500 lm	3000 K	58.4	128	24	744	50.1	150	2	0	2
7500 lm	4000 K	55.2	136	24	704	47.2	159	2	0	2
9000 lm	2200 K	79.9	113	32	780	70.2	128	2	0	2
9000 lm	2700 K	71.8	125	32	698	62.6	144	2	0	2
9000 lm	3000 K	68.1	132	32	662	59.1	152	2	0	2
9000 lm	4000 K	64.4	140	32	626	55.7	162	2	0	2
10500 lm	2200 K	88.8	118	48	590	78.6	134	2	0	2
10500 lm	2700 K	85.1	123	32	830	75.1	140	2	0	2
10500 lm	3000 K	80.5	130	32	786	70.8	148	2	0	2
10500 lm	4000 K	76.1	138	32	742	66.7	157	2	0	2
12000 lm	2200 K	102.7	117	48	684	91.7	131	2	0	2
12000 lm	2700 K	92.3	130	48	614	81.9	147	2	0	2
12000 lm	3000 K	87.6	137	48	582	77.4	155	2	0	2
12000 lm	4000 K	88.2	136	32	862	78.1	154	2	0	2
13500 lm	2700 K	105	129	48	698	93.8	144	2	0	2
13500 lm	3000 K	99.4	136	48	662	88.6	152	2	0	2
13500 lm	4000 K	94.1	143	48	626	83.6	161	2	0	2

Light 21 | Luminaire | Post top entry

Optic: T4 wide

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	1	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	1	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	1	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	1	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	1	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	1	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	1	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	1	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	1	0	2
6000 lm	2700 K	48.3	124	24	614	40.9	147	1	0	2
6000 lm	3000 K	45.9	131	24	582	38.7	155	1	0	2
6000 lm	4000 K	43.5	138	24	550	36.5	164	1	0	2
7500 lm	2200 K	65.5	115	32	638	56.7	132	2	0	2
7500 lm	2700 K	61.6	122	24	786	53.1	141	2	0	2
7500 lm	3000 K	58.4	128	24	744	50.1	150	2	0	2
7500 lm	4000 K	55.2	136	24	704	47.2	159	2	0	2
9000 lm	2200 K	79.9	113	32	780	70.2	128	2	0	2
9000 lm	2700 K	71.8	125	32	698	62.6	144	2	0	2
9000 lm	3000 K	68.1	132	32	662	59.1	152	2	0	2
9000 lm	4000 K	64.4	140	32	626	55.7	162	2	0	2
10500 lm	2200 K	88.8	118	48	590	78.6	134	2	0	2
10500 lm	2700 K	85.1	123	32	830	75.1	140	2	0	2
10500 lm	3000 K	80.5	130	32	786	70.8	148	2	0	2
10500 lm	4000 K	76.1	138	32	742	66.7	157	2	0	2
12000 lm	2200 K	102.7	117	48	684	91.7	131	2	0	2
12000 lm	2700 K	92.3	130	48	614	81.9	147	2	0	2
12000 lm	3000 K	87.6	137	48	582	77.4	155	2	0	2
12000 lm	4000 K	88.2	136	32	862	78.1	154	2	0	2
13500 lm	2700 K	105	129	48	698	93.8	144	2	0	3
13500 lm	3000 K	99.4	136	48	662	88.6	152	2	0	3
13500 lm	4000 K	94.1	143	48	626	83.6	161	2	0	3

Light 21 | Luminaire | Post top entry

Optic: T4 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	1	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	1	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	1	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	1	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	1	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	1	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	1	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	1	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	1	0	1
6000 lm	2700 K	48.3	124	24	614	40.9	147	1	0	1
6000 lm	3000 K	45.9	131	24	582	38.7	155	1	0	1
6000 lm	4000 K	43.5	138	24	550	36.5	164	1	0	1
7500 lm	2200 K	65.5	115	32	638	56.7	132	2	0	1
7500 lm	2700 K	61.6	122	24	786	53.1	141	2	0	1
7500 lm	3000 K	58.4	128	24	744	50.1	150	2	0	1
7500 lm	4000 K	55.2	136	24	704	47.2	159	2	0	1
9000 lm	2200 K	79.9	113	32	780	70.2	128	2	0	2
9000 lm	2700 K	71.8	125	32	698	62.6	144	2	0	2
9000 lm	3000 K	68.1	132	32	662	59.1	152	2	0	2
9000 lm	4000 K	64.4	140	32	626	55.7	162	2	0	2
10500 lm	2200 K	88.8	118	48	590	78.6	134	2	0	2
10500 lm	2700 K	85.1	123	32	830	75.1	140	2	0	2
10500 lm	3000 K	80.5	130	32	786	70.8	148	2	0	2
10500 lm	4000 K	76.1	138	32	742	66.7	157	2	0	2
12000 lm	2200 K	102.7	117	48	684	91.7	131	2	0	2
12000 lm	2700 K	92.3	130	48	614	81.9	147	2	0	2
12000 lm	3000 K	87.6	137	48	582	77.4	155	2	0	2
12000 lm	4000 K	88.2	136	32	862	78.1	154	2	0	2
13500 lm	2700 K	105	129	48	698	93.8	144	3	0	2
13500 lm	3000 K	99.4	136	48	662	88.6	152	3	0	2
13500 lm	4000 K	94.1	143	48	626	83.6	161	3	0	2

Light 21 | Luminaire | Post top entry

Optic: T5 square medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2200 K	21.5	116	16	412	17.9	140	1	0	1
2500 lm	2700 K	19.4	129	16	370	16.1	155	1	0	1
2500 lm	3000 K	18.5	135	16	352	15.3	163	1	0	1
2500 lm	4000 K	17.4	144	16	334	14.4	174	1	0	1
3500 lm	2200 K	31	113	16	590	26.2	134	1	0	1
3500 lm	2700 K	27.8	126	16	532	23.4	150	1	0	1
3500 lm	3000 K	26.5	132	16	504	22.2	158	1	0	1
3500 lm	4000 K	24.9	141	16	478	20.9	167	1	0	1
4500 lm	2200 K	41	110	16	780	35.1	128	2	0	1
4500 lm	2700 K	36.7	123	16	698	31.3	144	2	0	1
4500 lm	3000 K	34.7	130	16	662	29.5	153	2	0	1
4500 lm	4000 K	32.9	137	16	626	27.9	161	2	0	1
6000 lm	2200 K	53.8	112	24	684	45.9	131	2	0	1
6000 lm	2700 K	48.3	124	24	614	40.9	147	2	0	1
6000 lm	3000 K	45.9	131	24	582	38.7	155	2	0	1
6000 lm	4000 K	43.5	138	24	550	36.5	164	2	0	1
7500 lm	2200 K	65.5	115	32	638	56.7	132	3	0	1
7500 lm	2700 K	61.6	122	24	786	53.1	141	3	0	1
7500 lm	3000 K	58.4	128	24	744	50.1	150	3	0	1
7500 lm	4000 K	55.2	136	24	704	47.2	159	3	0	1
9000 lm	2200 K	79.9	113	32	780	70.2	128	3	0	1
9000 lm	2700 K	71.8	125	32	698	62.6	144	3	0	1
9000 lm	3000 K	68.1	132	32	662	59.1	152	3	0	1
9000 lm	4000 K	64.4	140	32	626	55.7	162	3	0	1
10500 lm	2200 K	88.8	118	48	590	78.6	134	3	0	1
10500 lm	2700 K	85.1	123	32	830	75.1	140	3	0	1
10500 lm	3000 K	80.5	130	32	786	70.8	148	3	0	1
10500 lm	4000 K	76.1	138	32	742	66.7	157	3	0	1
12000 lm	2200 K	102.7	117	48	684	91.7	131	3	0	2
12000 lm	2700 K	92.3	130	48	614	81.9	147	3	0	2
12000 lm	3000 K	87.6	137	48	582	77.4	155	3	0	2
12000 lm	4000 K	88.2	136	32	862	78.1	154	3	0	2
13500 lm	2700 K	105	129	48	698	93.8	144	3	0	2
13500 lm	3000 K	99.4	136	48	662	88.6	152	3	0	2
13500 lm	4000 K	94.1	143	48	626	83.6	161	3	0	2