

Project location:


Project name:

Fixture type:

Qty:

Notes:

Nova | Pole | Steel | Simple | Max 2 light sources

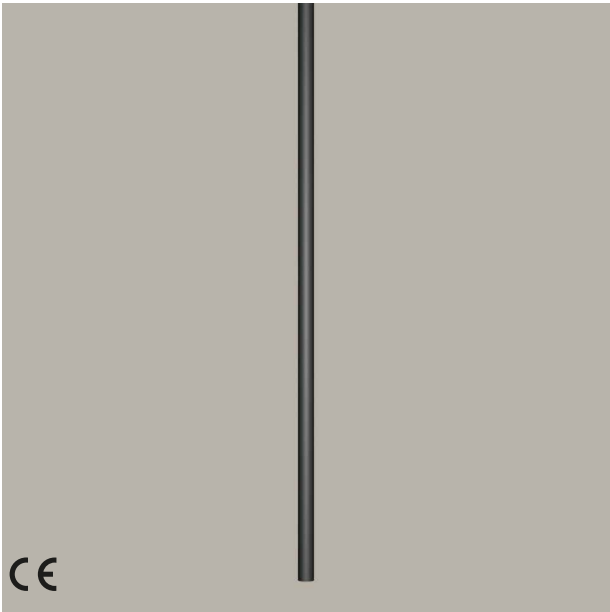

Ordering Information / Guide

Example: NV1126000-N-BM-EPR-GD2-HC0400-ZD102089-CN0

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BM Buried root	EPR Tapered	GD1 Suspended bracket Max 1 light source	HC0400 4000 mm	ZD102089 Base 102 - Top 89 mm	CN0 Grey [Neri] Textured
BF Flanged		GD2 Suspended bracket Max 2 light sources	HC0500 5000 mm HC0600 6000 mm		

Generated code: NV1126000 - N - _ _ - _ _ - _ _ _ _ - _ _ _ _ _ - _ _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Nova | Pole | Steel | Simple | Max 2 light sources

MECHANICAL CHARACTERISTICS

Steel pole UNI EN 10219-1 (S235JR), hot-dip galvanized according to UNI EN ISO 1461.

CE-certified pole, compliant with standard UNI EN 40-5.

Section	Base/Top 102/89 mm
Hatch size	132x38 mm
Height under ground	100 mm, 600 mm
Slot height below ground line for cable entry	150x50 mm
Weight	35.3-51 kg
Finish	Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.