
NERI

| | |
|---|---|
| Project location: | Fixture type: Qty: |
| Project name: | Notes: |

## NEBULA ESSENTIAL | POLE | 3 STAGGERED LIGHT SOURCES



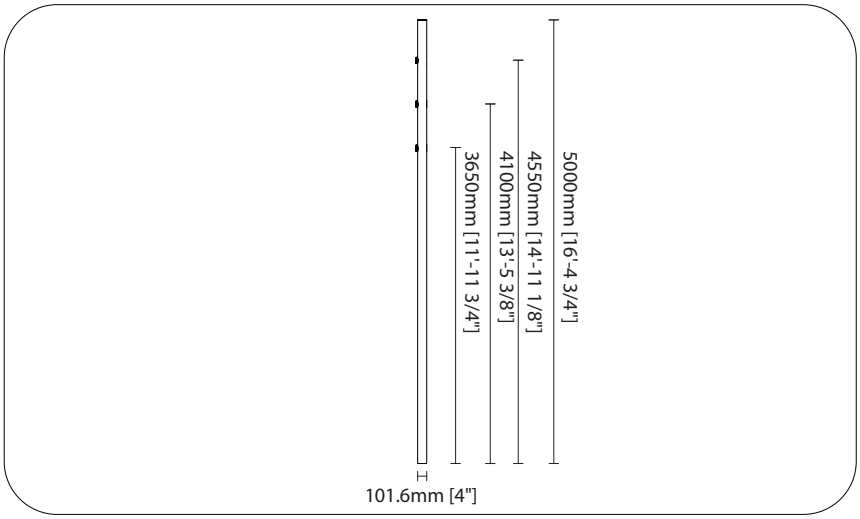


CE

## ORDERING INFORMATION / GUIDE

Example**: PONEBED-N-BM-EPF-GX3-HC0510-ZD102102-CN0**

| GROUND FIXING | SHAPE | TOP SET UP / LIGHT POINTS | HEIGHT | SECTION | FINISH |
|---|---|---|---|---|---|
| **BM**<br>Buried root | **EPF**<br>Cylindrical | **GX3**<br>Max 3 light sources | **HC0510**<br>5100 mm | **ZD102102**<br>Base 102 - Top 102 mm | **CN0**<br>Grey [Neri] Textured |
| **BF**<br>Flanged | | | **HC0600**<br>6000 mm | **ZD152152**<br>Base 152 - Top 152 mm | |
| | | | **HC0690**<br>6900 mm | | |
| | | | **HC0780**<br>7800 mm | | |

Generated code: **PONEBED - N** - _ _ - _ _ _ - _ _ _ - _ _ _ _ _ _ - _ _ _ _ _ _ _ _ _ - _ _ _

**CONFIGURATION NOTES**
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

**ON REQUEST**
Non-standard variants and configurations available upon request. Please contact Neri for further information.


Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

## NEBULA ESSENTIAL | POLE | 3 STAGGERED LIGHT SOURCES

### MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

**Section:** Base/Top 102/102 mm, 152/152 mm
**Hatch size:** 358x78 mm, 558x114 mm
**Height under ground:** 500 mm, 700 mm
**Slot height below ground line for cable entry:** 300x60 mm, 500x95 mm
**Weight:** 43.1-110.9 kg
**Finish:** Grey [Neri] Textured

### INSTALLATION

Square flange (D) 266 x 266 mm (18 mm thick), for fixing with 4 anchor bolts to a foundation block (anchors and bolts not supplied).
We recommend concealed flange mounting, positioned 100 mm below the finished pavement level.
Square flange (D) 366 x 366 mm (22 mm thick), for fixing with 4 anchor bolts to a foundation block (anchors and bolts not supplied).
We recommend concealed flange mounting, positioned 100 mm below the finished pavement level.
The pole must be embedded 60 cm deep, perfectly plumb, into a concrete foundation block.
The pole must be embedded 80 cm deep, perfectly plumb, into a concrete foundation block.

### WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.


Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.