
NERI

Project location:		Fixture type:	Qty:
Project name:		Notes:	

NOVA M | LUMINAIRE | NOVA M



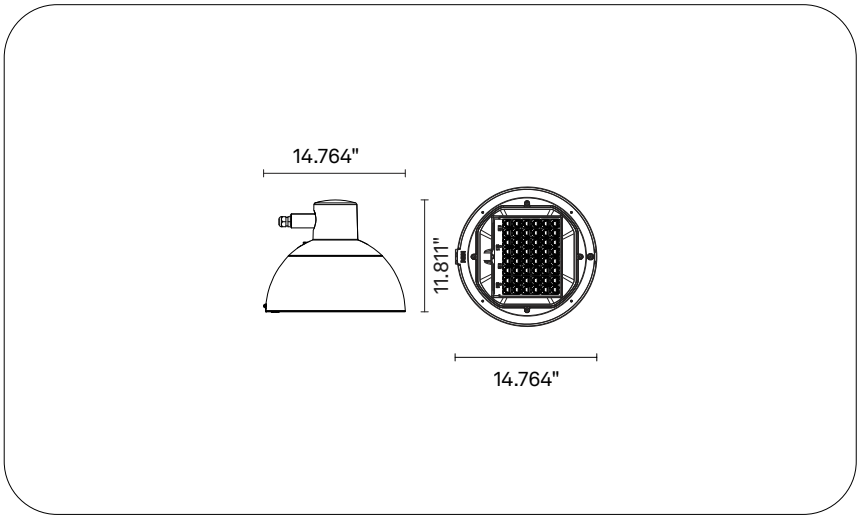

IP66 IK10 cULus

ORDERING INFORMATION / GUIDE

Example**: LUNOVM0-U-D22-830-L075-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**827** Ra80 2700 K	**L025** 2500 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D46 AFR/SPORT N	**830** Ra80 3000 K	**L033** 3300 lm		**V3** 347V-480V			
D36 T2 medium	**840** Ra80 4000 K	**L035** 3500 lm					
D47 AFR/SPORT W	**XAM** Amber	**L045** 4500 lm					
D48 T2 wide		**L060** 6000 lm					
D22 T3 narrow		**L075** 7500 lm					
D25 T2 narrow		**L090** 9000 lm					
D37 T3 medium		**L105** 10500 lm					
D24 T4 wide		**L120** 12000 lm					
D38 T4 medium							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

Generated code: **LUNOVM0 - U** - _ _ _ - _ _ _ - _ _ _ _ - _ _ - _ _ - _ _ _ - _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 330-822 mA
Power rating: 14.3-83 W
Nominal Flux: 2500-12000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optics: T1 short, AFR/SPORT N, T2 medium, AFR/SPORT W, T2 wide, T3 narrow, T2 narrow, T3 medium, T4 wide, T4 medium, T5 square medium, T5 Round, Left corner, Right corner
Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 160° γ = 31, 69°
Luminous flux: 2500-12000 lm
Luminous efficacy: 35-146 lm/W
BUG: B=1-3, U=0, G=0-3

ELECTRICAL CHARACTERISTICS
Luminaire power: 17.3-93.5 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99
Insulation class: UL
Control type - driver: 0-10V+CLO

Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with a cylindrical upper frame for housing the internal component and a lower frame openable via hinge for access to the auxiliary and optical compartment.
Protective shield in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector.
Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote monitoring systems.

Diameter: 14.764 in
Height: 11.811 in
Weight: 23.15 lb
EPA: 0.32 ft²
Finish: Grey [Neri] Textured

INSTALLATION
Suitable for side mounting only on Nova system tips.


WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.


Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T1 short


Lens: Prismatic






Optic: AFR/SPORT N


Lens: Prismatic






Optic: T2 medium


Lens: Prismatic






Optic: AFR/SPORT W


Lens: Prismatic






Optic: T2 wide


Lens: Prismatic






Optic: T3 narrow


Lens: Prismatic






Optic: T2 narrow


Lens: Prismatic






Optic: T3 medium

Lens: Prismatic







Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T4 wide


Lens: Prismatic






Optic: T4 medium


Lens: Prismatic






Optic: T5 square medium


Lens: Prismatic






Optic: T5 Round


Lens: Prismatic






Optic: Left corner


Lens: Prismatic






Optic: Right corner

Lens: Prismatic






Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Amber


Optic: T1 short

Lens: Prismatic

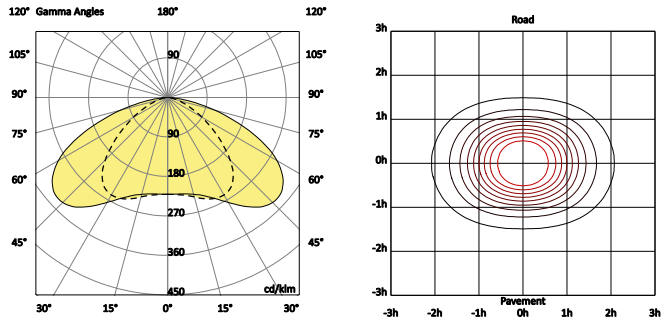


Optic: AFR/SPORT N

Lens: Prismatic

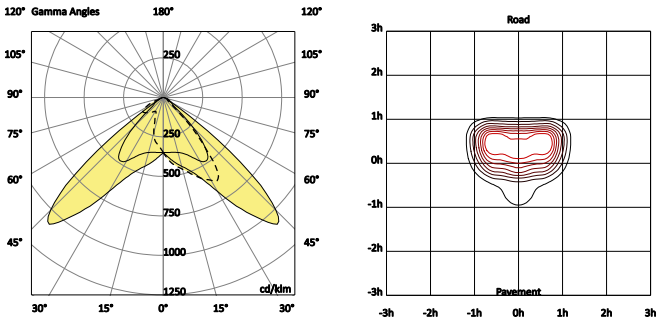


Optic: T2 medium

Lens: Prismatic

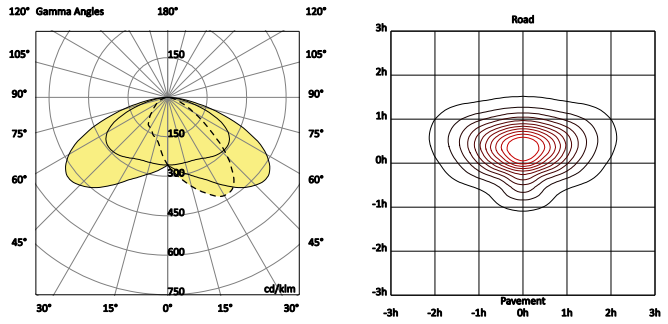


Optic: AFR/SPORT W

Lens: Prismatic

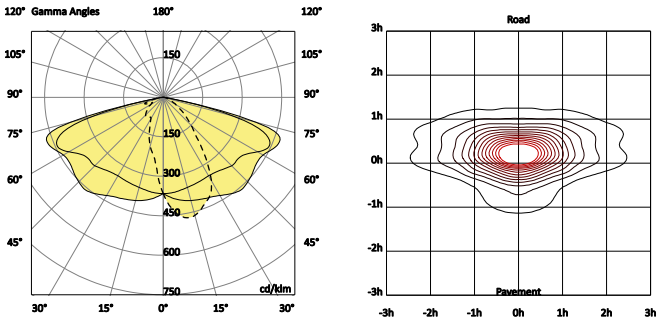


Optic: T2 wide

Lens: Prismatic

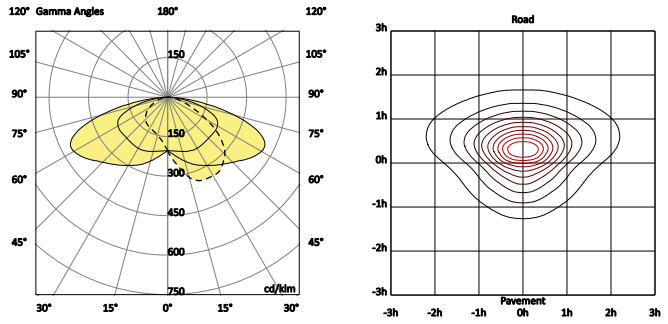

Optic: T3 narrow

Lens: Prismatic

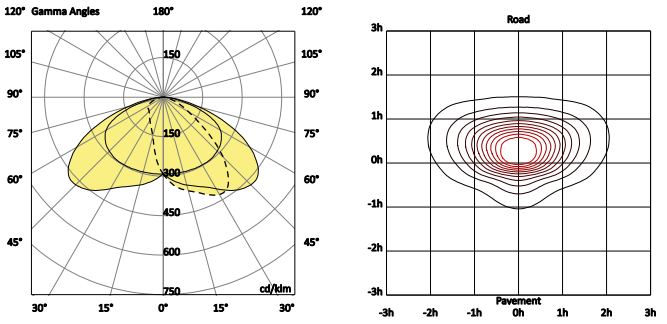


Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Amber


Optic: T2 narrow

Lens: Prismatic

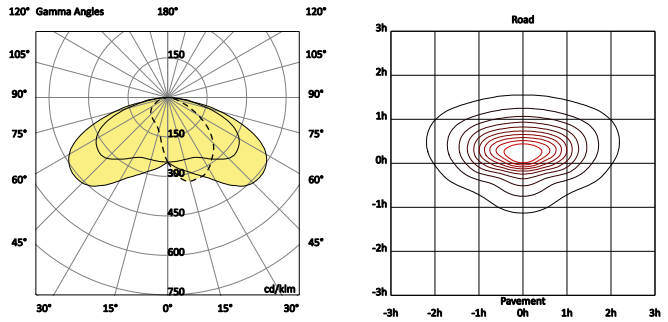


Optic: T3 medium

Lens: Prismatic

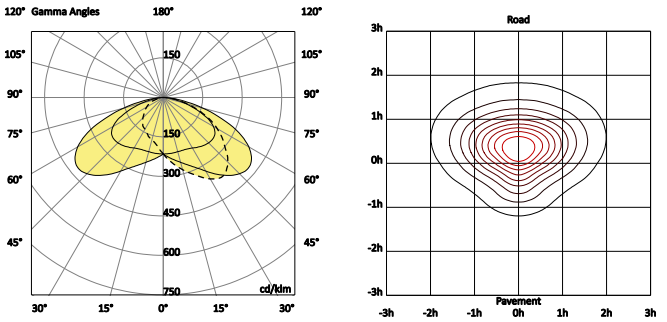


Optic: T4 wide

Lens: Prismatic

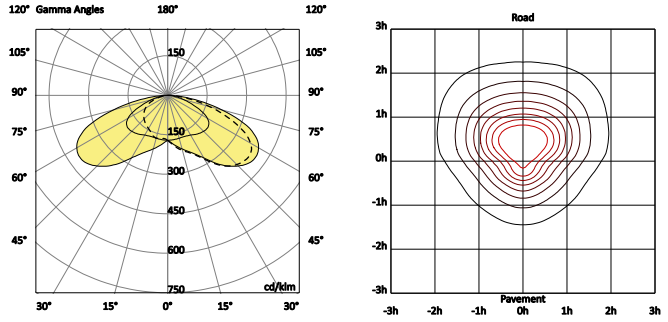


Optic: T4 medium

Lens: Prismatic

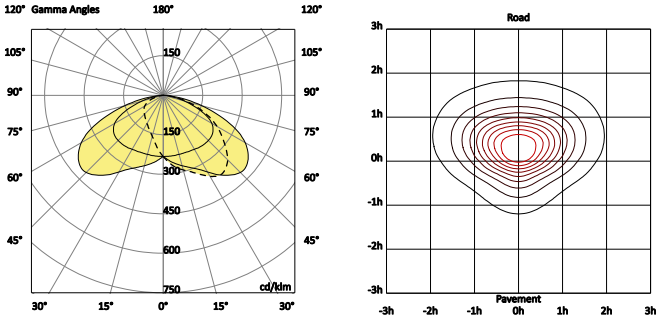


Optic: T5 square medium

Lens: Prismatic

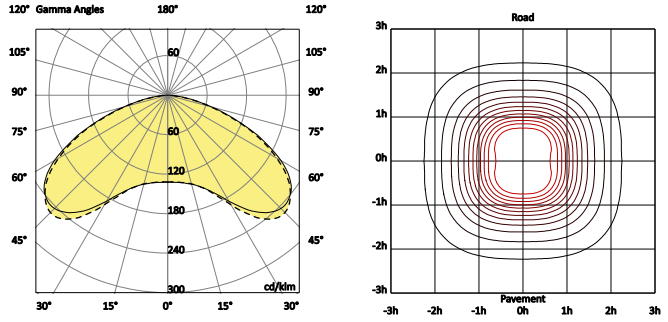

Optic: T5 Round

Lens: Prismatic

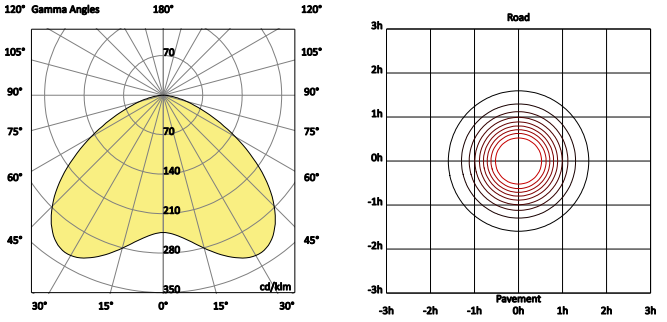

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T1 short

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	2	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	2	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	2	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	2	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	2	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	2	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	2
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	2
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	2
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	3	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	3	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	3	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	3
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	3
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	3
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	3
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	3

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: AFR/SPORT N

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	0
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	0
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	0
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	1
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	1
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	1
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	1
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	1

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T2 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: AFR/SPORT W

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T2 wide

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	2
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	2
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	2
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T3 narrow

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T2 narrow

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T3 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T4 wide

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	2
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	2
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	2
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	3
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	3

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T4 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T5 square medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	2	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	2	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	2	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	3	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	3	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	3	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	3	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	3	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	3	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	1
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	1
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	1
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: T5 Round

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	2	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	2	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	2	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	2	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	2	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	2	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	3	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	3	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	3	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	1
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	1
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	1
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	1
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	1

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: Left corner

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

NOVA M | LUMINAIRE | NOVA M

Optic: Right corner

Lens: Prismatic

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.