


Alkes | Pole | Steel | Arch pole for roundabouts | Max 1 light source

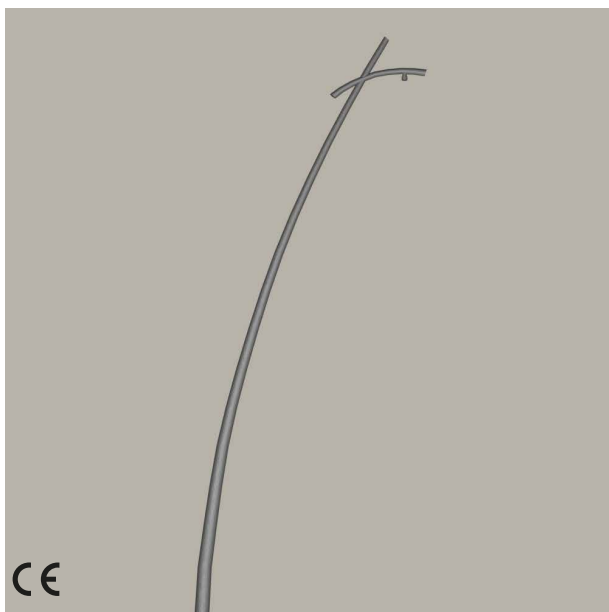

Ordering Information / Guide

Example: **AL0001209-N-BM-EPC-GG1-HC0575-ZD114060-CN0**

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BM Buried root	EPC Conical	GG1 Suspended post top Max 1 light source	HC0575 5750 mm	ZD114060 Base 114 - Top 60 mm	CN0 Grey [Neri] Textured
BF Flanged			HC0800 8000 mm	ZD144060 Base 144 - Top 60 mm	
			HC0900 9000 mm	ZD154060 Base 154 - Top 60 mm	

Generated code: **AL0001209 - N -** _ _ _ _ _

CONFIGURATION NOTES

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.

To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Alkes | Pole | Steel | Arch pole for roundabouts | Max 1 light source**MECHANICAL CHARACTERISTICS**

Lighting pole in S235 UNI EN 10025, with longitudinal weld ground smooth, hot-dip galvanized in accordance with UNI EN ISO 1461. CE-certified pole, compliant with standard UNI EN 40-5.

Section	Base/Top 114/60 mm, 144/60 mm, 154/60 mm
Hatch size	132x38 mm, 186x45 mm
Height under ground	600 mm, 800 mm
Slot height below ground line for cable entry	150x50 mm
Weight	50.1-85.2 kg
Finish	Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.