

Project location:


Project name:

Fixture type:

Qty:

Notes:

Sheliak | Pole | Cast iron | Small | Max 3 light sources

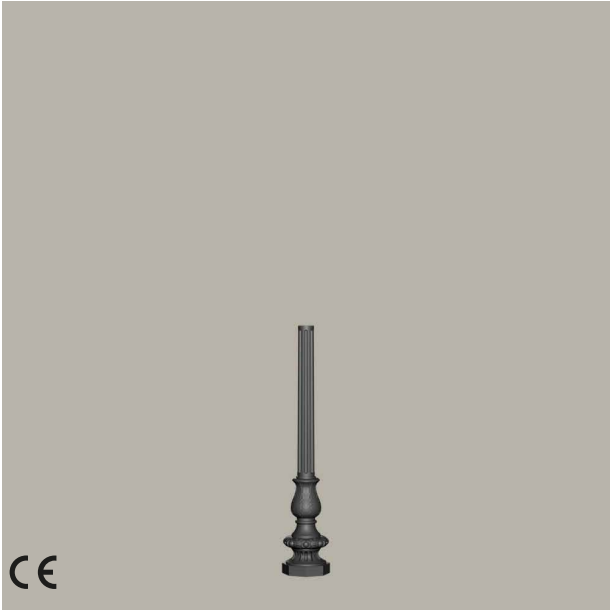

Ordering Information / GuideExample: SH1152000-N-BM-EPD-GE2-HC0328-ZD114060-CNO

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BM Buried root	EPD Decorated	GC3 Bracket post top entry Max 3 light sources	HC0279 109.843 in	ZD114060 Base 4.488 - Top 2.362 in	CNO Grey [Neri] Textured
BF Flanged		GE2 Suspended swan neck Max 2 light sources	HC0328 129.134 in		

Generated code: SH1152000 - N - _ _ - _ _ - _ _ _ _ - _ _ _ _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Sheliak | Pole | Cast iron | Small | Max 3 light sources

MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core
UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

Section	Base/Top 4.488/2.362 in
Hatch size	1.969x1.969 in
Height under ground	23.622 in
Slot height below ground line for cable entry	5.906x1.969 in
Weight	148.81-156.75 lb
Finish	Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.