


Nova M | Luminaire | Nova M

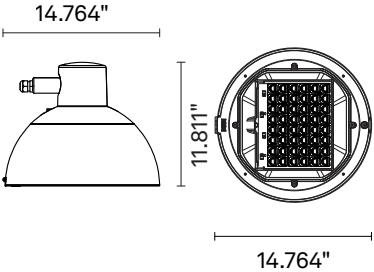

Ordering Information / Guide

Example: LUNOVM0-U-D22-830-L075-SP-V0-F35-MU-CNO

Optics	Ra+K	Luminous flux	Lens	Voltage	Driver Function	ISO Class	Finish
D28 T1 short	827 Ra80 2700 K	L025 2500 lm	SP Prismatic	V0 120V-277V	F35 0-10V+CLO	MU UL	CNO Grey [Neri] Textured
D46 AFR/SPORT N	830 Ra80 3000 K	L033 3300 lm		V3 347V-480V			
D36 T2 medium	840 Ra80 4000 K	L035 3500 lm					
D47 AFR/SPORT W	XAM Amber	L045 4500 lm					
D48 T2 wide		L060 6000 lm					
D22 T3 narrow		L075 7500 lm					
D25 T2 narrow		L090 9000 lm					
D37 T3 medium		L105 10500 lm					
D24 T4 wide		L120 12000 lm					
D38 T4 medium							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

Generated code: LUNOVM0 - U - _ _ _ _ - _ _ _ _ - _ _ _ _ - _ _ _ _ - _ _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Nova M | Luminaire | Nova M

SOURCE

High-power LED matrix.	
Energy-efficiency class	, D, E
LED forward current	330-822 mA
Power rating	14.3-83 W
Nominal Flux	2500-12000 lm
Nominal CCT (Color temperature)	2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra)	80
Standard Deviation Colour Matching	≤5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.	
Optics	T1 short, AFR/SPORT N, T2 medium, AFR/SPORT W, T2 wide, T3 narrow, T2 narrow, T3 medium, T4 wide, T4 medium, T5 square medium, T5 Round, Left corner, Right corner LOR = 100% ULOR = 0%
Optical efficiency	16, 24, 32, 48
LED quantity	Cutoff, Semi Cutoff C = 0, 160° γ = 31, 69°
Cutoff Angle	2500-12000 lm
Luminous flux	35-146 lm/W
Luminous efficacy	B=1-3, U=0, G=0-3
BUG	

ELECTRICAL CHARACTERISTICS

Luminaire power	17.3-93.5 W
Voltage	120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor	≥0.99
Insulation class	UL
Control type - driver	0-10V+CLO
Surge protection	20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminum (UNI EN 1706) with a cylindrical upper frame for housing the internal component and a lower frame openable via hinge for access to the auxiliary and optical compartment. Protective shield in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector. Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote monitoring systems.	
Diameter	14.764 in
Height	11.811 in
Weight	23.15 lb
EPA	0.32 ft²
Finish	Grey [Neri] Textured

INSTALLATION

Suitable for side mounting only on Nova system tips.


WARNINGS

Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.

Nova M | Luminaire | Nova M


Optic: T1 short

Lens: Prismatic

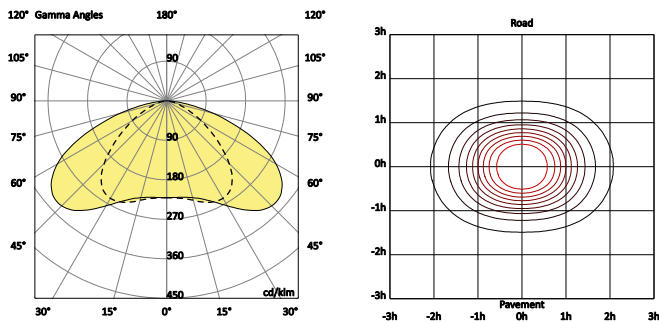


Optic: AFR/SPORT N

Lens: Prismatic

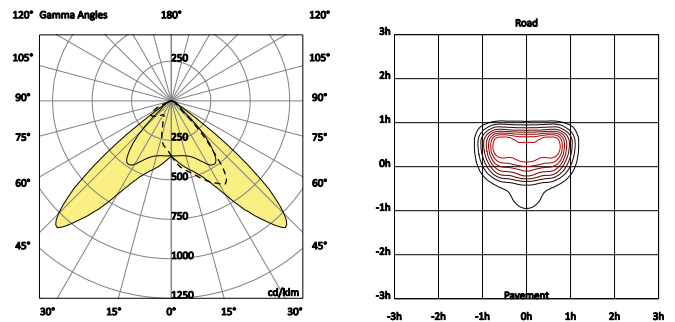


Optic: T2 medium

Lens: Prismatic

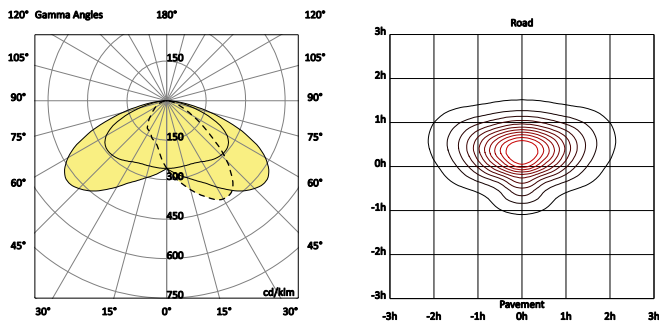


Optic: AFR/SPORT W

Lens: Prismatic

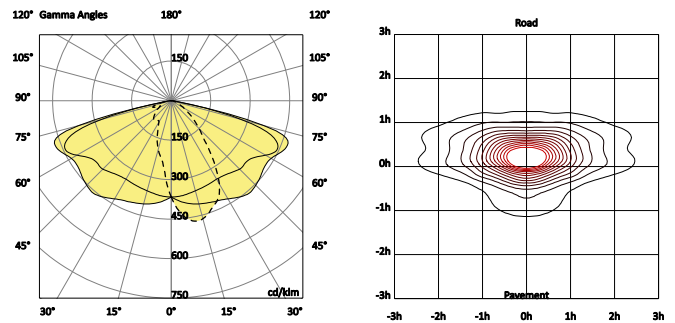


Optic: T2 wide

Lens: Prismatic

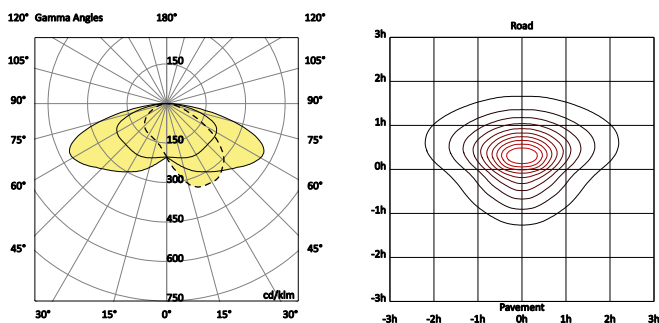


Optic: T3 narrow

Lens: Prismatic

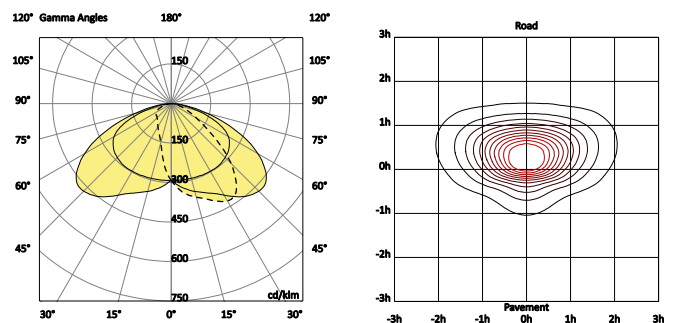


Optic: T2 narrow

Lens: Prismatic

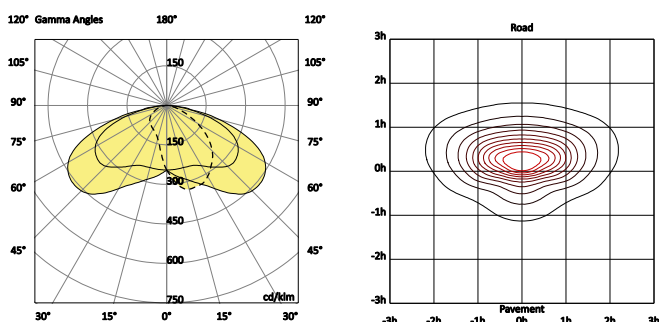


Optic: T3 medium

Lens: Prismatic

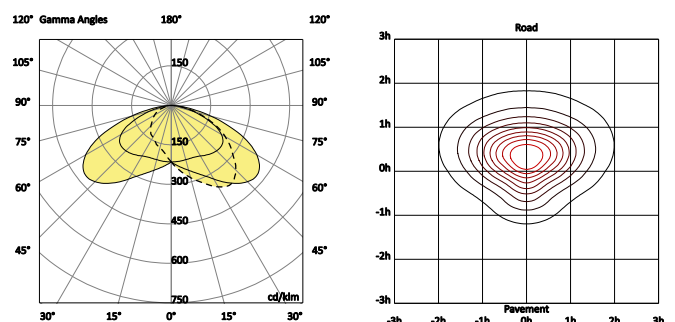


Nova M | Luminaire | Nova M


Optic: T4 wide
Lens: Prismatic

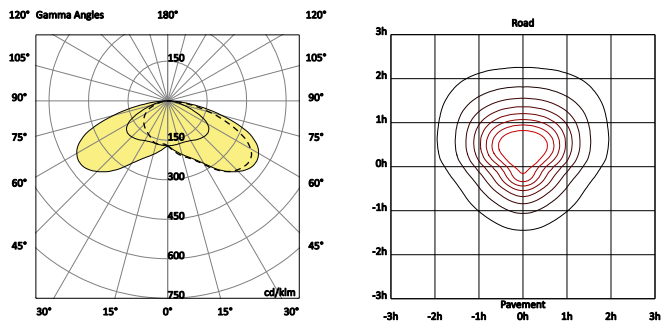


Optic: T4 medium
Lens: Prismatic

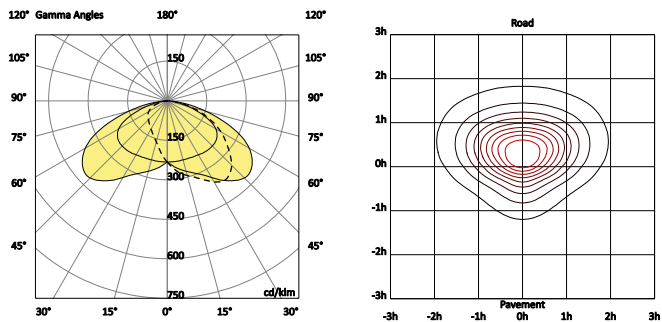


Optic: T5 square medium
Lens: Prismatic

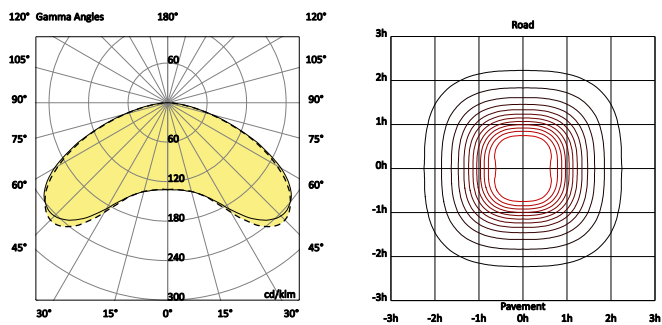


Optic: T5 Round
Lens: Prismatic

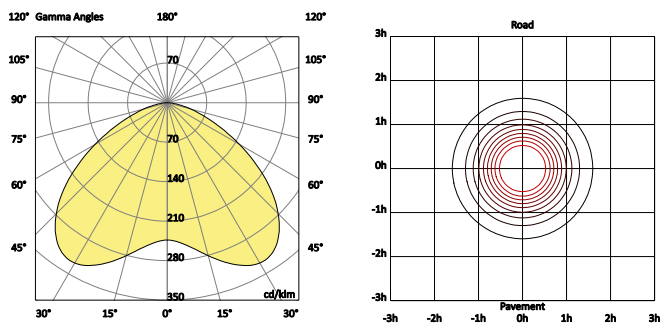

Optic: Left corner
Lens: Prismatic

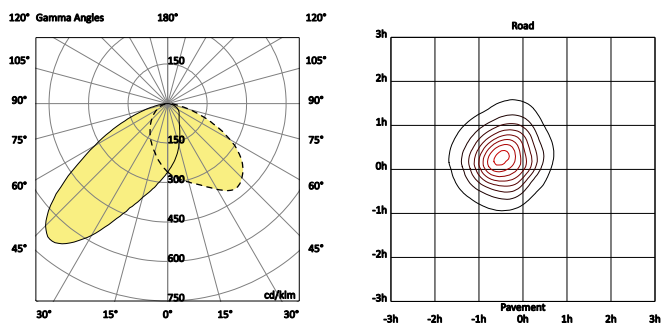



Optic: Right corner
Lens: Prismatic

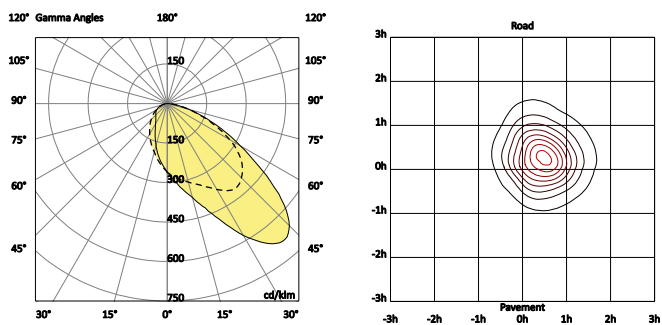



Nova M | Luminaire | Nova M

Amber



Optic: T1 short	Optic: AFR/SPORT N
Lens: Prismatic	Lens: Prismatic

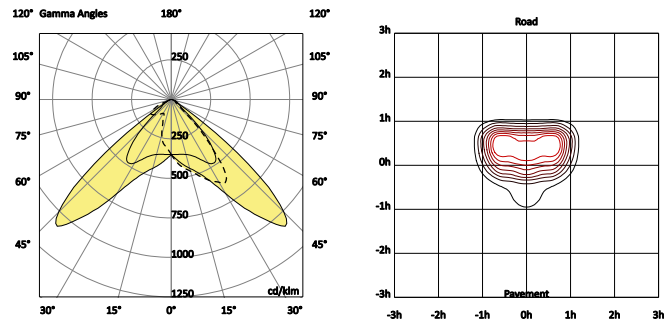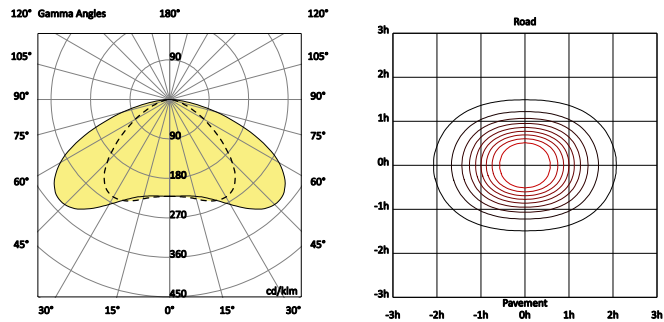

Optic: T2 medium	Optic: AFR/SPORT W
Lens: Prismatic	Lens: Prismatic

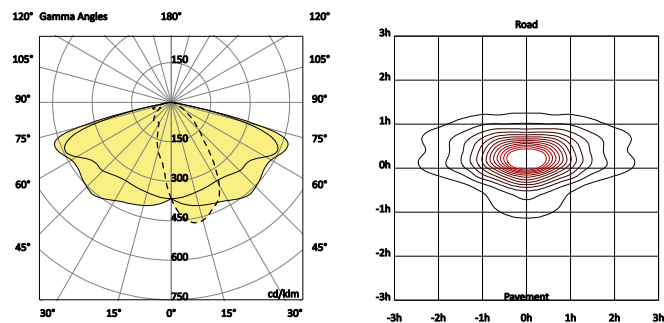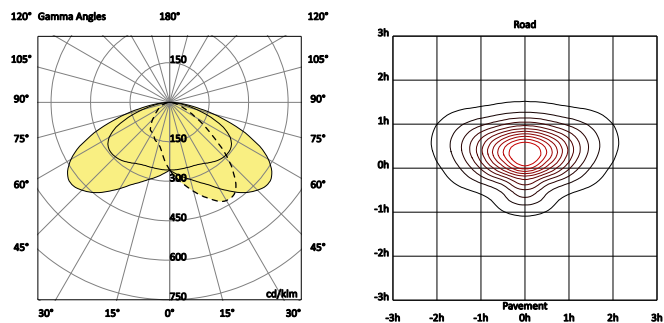


Optic: T2 wide	Optic: T3 narrow
Lens: Prismatic	Lens: Prismatic

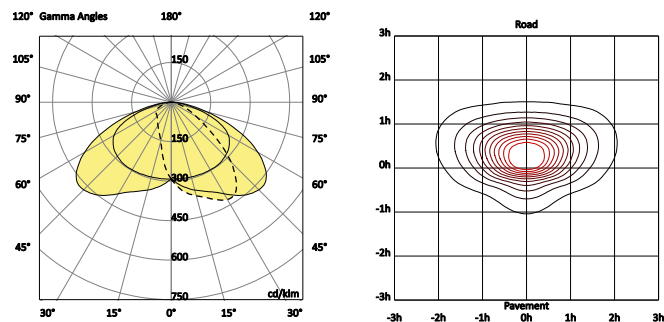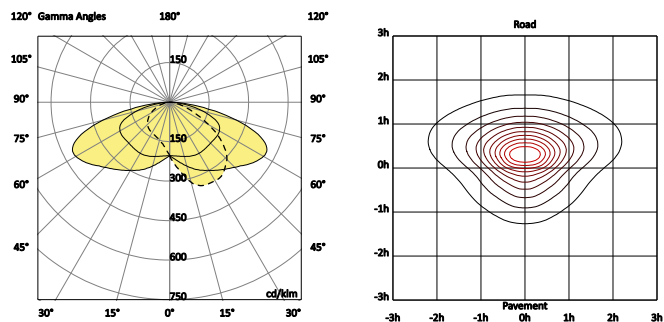


Nova M | Luminaire | Nova M

Amber


Optic: T2 narrow
Lens: Prismatic

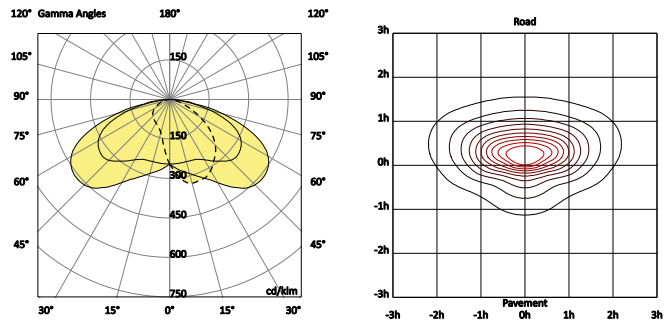


Optic: T3 medium
Lens: Prismatic

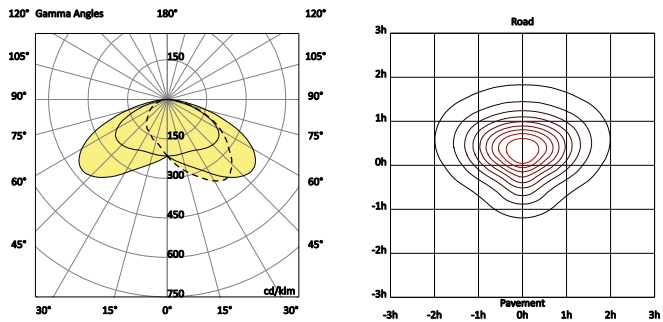


Optic: T4 wide
Lens: Prismatic

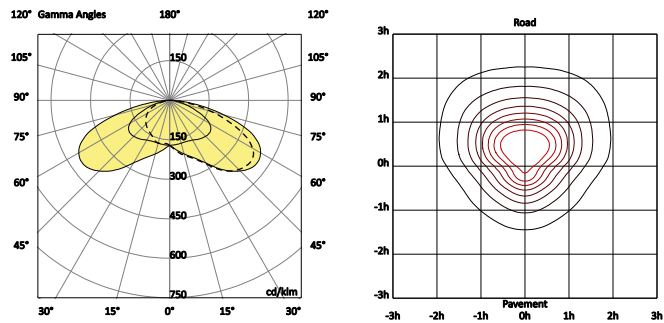


Optic: T4 medium
Lens: Prismatic

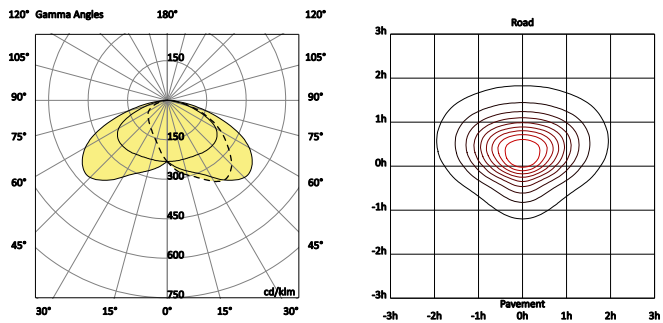

Optic: T5 square medium
Lens: Prismatic

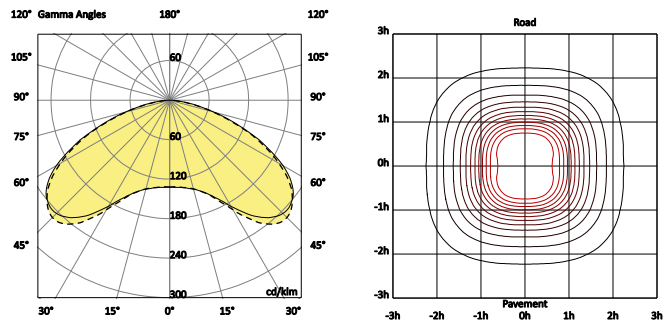

Optic: T5 Round
Lens: Prismatic

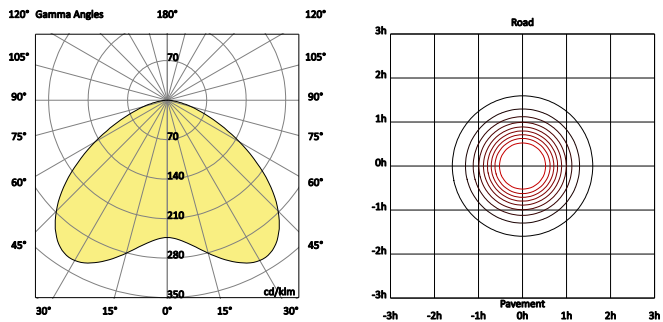

Nova M | Luminaire | Nova M

Optic: T1 short

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	2	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	2	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	2	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	2	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	2	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	2	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	2
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	2
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	2
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	3	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	3	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	3	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	3
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	3
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	3
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	3
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	3

Nova M | Luminaire | Nova M

Optic: AFR/SPORT N

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	0
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	0
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	0
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	1
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	1
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	1
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	1
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	1

Nova M | Luminaire | Nova M

Optic: T2 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Nova M | Luminaire | Nova M

Optic: AFR/SPORT W

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2

Nova M | Luminaire | Nova M

Optic: T2 wide

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	2
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	2
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	2
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Nova M | Luminaire | Nova M

Optic: T3 narrow

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Nova M | Luminaire | Nova M

Optic: T2 narrow

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Nova M | Luminaire | Nova M

Optic: T3 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Nova M | Luminaire | Nova M

Optic: T4 wide

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	2
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	2
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	2
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	3
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	3

Nova M | Luminaire | Nova M

Optic: T4 medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	1	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	1	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	1	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	2
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	2
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	2
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	2	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	2	0	2

Nova M | Luminaire | Nova M

Optic: T5 square medium

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	2	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	2	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	2	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	3	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	3	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	3	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	3	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	3	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	3	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	1
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	1
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	1
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2

Nova M | Luminaire | Nova M

Optic: T5 Round

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3300 lm	Amber	93.5	35	48	750	83	40	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	2	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	2	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	2	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	2	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	2	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	2	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	3	0	1
9000 lm	3000 K	67.4	134	32	656	58.5	154	3	0	1
9000 lm	4000 K	63.9	141	32	620	55.2	163	3	0	1
10500 lm	2700 K	84.2	125	32	822	74.3	141	3	0	1
10500 lm	3000 K	79.7	132	32	778	70.1	150	3	0	1
10500 lm	4000 K	75.4	139	32	736	66	159	3	0	1
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	1
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	1

Nova M | Luminaire | Nova M

Optic: Left corner

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2

Nova M | Luminaire | Nova M

Optic: Right corner

Lens: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	19.2	130	16	368	15.9	157	1	0	1
2500 lm	3000 K	18.2	137	16	350	15.1	166	1	0	1
2500 lm	4000 K	17.3	145	16	330	14.3	175	1	0	1
3500 lm	2700 K	27.6	127	16	526	23.2	151	1	0	1
3500 lm	3000 K	26.1	134	16	500	21.9	160	1	0	1
3500 lm	4000 K	24.7	142	16	472	20.7	169	1	0	1
4500 lm	2700 K	36.4	124	16	692	31	145	1	0	1
4500 lm	3000 K	34.4	131	16	656	29.2	154	1	0	1
4500 lm	4000 K	32.6	138	16	620	27.6	163	1	0	1
6000 lm	2700 K	47.9	125	24	608	40.5	148	2	0	1
6000 lm	3000 K	45.5	132	24	576	38.3	157	2	0	1
6000 lm	4000 K	43	140	24	546	36.1	166	2	0	1
7500 lm	2700 K	61.1	123	24	778	52.6	143	2	0	1
7500 lm	3000 K	57.8	130	24	736	49.6	151	2	0	1
7500 lm	4000 K	54.7	137	24	696	46.7	161	2	0	1
9000 lm	2700 K	71.1	127	32	692	61.9	145	2	0	2
9000 lm	3000 K	67.4	134	32	656	58.5	154	2	0	2
9000 lm	4000 K	63.9	141	32	620	55.2	163	2	0	2
10500 lm	2700 K	84.2	125	32	822	74.3	141	2	0	2
10500 lm	3000 K	79.7	132	32	778	70.1	150	2	0	2
10500 lm	4000 K	75.4	139	32	736	66	159	2	0	2
12000 lm	3000 K	86.7	138	48	576	76.6	157	3	0	2
12000 lm	4000 K	82.1	146	48	546	72.3	166	3	0	2