
NERI

Project location:		Fixture type:	Qty:
Project name:		Notes:	

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S



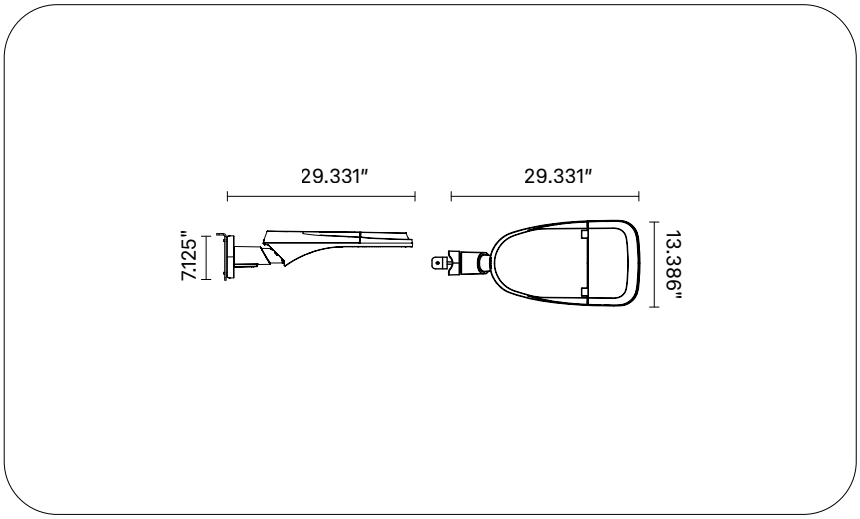

IP66 IK09 cULus

ORDERING INFORMATION / GUIDE

Example: **LUANTA0-U-D28-727-L025-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**727** Ra70 2700 K	**L016** 1600 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D46 AFR/SPORT N	**730** Ra70 3000 K	**L025** 2500 lm		**V3** 347V-480V	**F43** 1-10V+PIR		
D36 T2 medium	**740** Ra70 4000 K	**L035** 3500 lm			**F11** NEMA-3		
D56 T2 medium + BLC	**XAM** Amber	**L045** 4500 lm			**F12** NEMA-7		
D47 AFR/SPORT W		**L060** 6000 lm					
D55 AFR/SPORT W + BLC		**L075** 7500 lm					
D48 T2 wide		**L090** 9000 lm					
D22 T3 narrow		**L105** 10500 lm					
D57 T3 narrow + BLC							
D25 T2 narrow							
D37 T3 medium							
D59 T3 medium + BLC							
D24 T4 wide							
D58 T4 wide + BLC							
D38 T4 medium							
D60 T4 medium + BLC							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

Generated code: **LUANTA0 - U** - _ _ _ - _ _ _ - _ _ _ _ - _ _ - _ _ - _ _ _ - _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

SOURCE
High-power LED matrix.

Energy-efficiency class: C, D
LED forward current: 304-924 mA
Power rating: 13.1-63.2 W
Nominal Flux: 1600-10500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optics: T1 short, AFR/SPORT N, T2 medium, T2 medium + BLC, AFR/SPORT W, AFR/SPORT W + BLC, T2 wide, T3 narrow, T3 narrow + BLC, T2 narrow, T3 medium, T3 medium + BLC, T4 wide, T4 wide + BLC, T4 medium, T4 medium + BLC, T5 square medium, T5 Round, Left corner, Right corner
Optical efficiency: LOR = 65-100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 155° γ = 13, 68°
Luminous flux: 1044-10500 lm
Luminous efficacy: 22-157 lm/W
BUG: B=0-3, U=0, G=0-3

ELECTRICAL CHARACTERISTICS
Luminaire power: 15.9-72.4 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99
Insulation class: UL
Control type - driver: 0-10V+CLO, 1-10V+PIR, NEMA-3, NEMA-7
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an openable upper frame for access to the auxiliary compartment and an integrated heat sink.
Shield in extra-clear tempered glass with IK08 impact resistance (EN 62262).
Internal white reflector in polycarbonate, silicone seal between lower frame and upper cover, stainless steel screws, and osmotic valve for pressure balancing.
Compartment dedicated to surge protectors or remote monitoring systems.

Length: 29.331 in
Width: 13.386 in
Height: 7.126 in
Weight: 23.15 lb
EPA: 0.32 ft²
Finish: Grey [Neri] Textured

INSTALLATION
Suitable for side mounting or pole-top installation on Ø 1-7/8″ tubes and Ø 2-3/8″ tubes.
Adjustable from 0°/+20° in pole-top configuration, from -5°/+15° in bracket configuration.


WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.


Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T1 short


Lens: Transparent






Optic: AFR/SPORT N


Lens: Transparent






Optic: T2 medium


Lens: Transparent






Optic: T2 medium + BLC


Lens: Transparent






Optic: AFR/SPORT W


Lens: Transparent






Optic: AFR/SPORT W + BLC


Lens: Transparent






Optic: T2 wide


Lens: Transparent






Optic: T3 narrow

Lens: Transparent







Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T3 narrow + BLC


Lens: Transparent






Optic: T2 narrow


Lens: Transparent






Optic: T3 medium


Lens: Transparent






Optic: T3 medium + BLC


Lens: Transparent






Optic: T4 wide


Lens: Transparent






Optic: T4 wide + BLC


Lens: Transparent






Optic: T4 medium


Lens: Transparent






Optic: T4 medium + BLC

Lens: Transparent







Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T5 square medium


Lens: Transparent






Optic: T5 Round


Lens: Transparent






Optic: Left corner


Lens: Transparent






Optic: Right corner

Lens: Transparent







Amber

Optic: T1 short


Lens: Transparent






Optic: AFR/SPORT N

Lens: Transparent






Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.


ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Amber

Optic: T2 medium


Lens: Transparent






Optic: T2 medium + BLC


Lens: Transparent






Optic: AFR/SPORT W


Lens: Transparent






Optic: AFR/SPORT W + BLC


Lens: Transparent






Optic: T2 wide


Lens: Transparent






Optic: T3 narrow

Lens: Transparent






Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.


ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Amber

Optic: T3 narrow + BLC


Lens: Transparent






Optic: T2 narrow


Lens: Transparent






Optic: T3 medium


Lens: Transparent






Optic: T3 medium + BLC


Lens: Transparent






Optic: T4 wide


Lens: Transparent






Optic: T4 wide + BLC

Lens: Transparent






Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.


ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Amber

Optic: T4 medium


Lens: Transparent






Optic: T4 medium + BLC


Lens: Transparent






Optic: T5 square medium


Lens: Transparent






Optic: T5 Round


Lens: Transparent






Optic: Left corner


Lens: Transparent






Optic: Right corner

Lens: Transparent





Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T1 short

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	1
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	2	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	2	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	2	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	2	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	2	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	2	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	2	0	2
6000 lm	2700 K	42.5	141	24	538	35.6	169	2	0	2
6000 lm	3000 K	40.4	149	24	524	34.6	173	2	0	2
6000 lm	3000 K	41.3	145	24	524	34.6	173	2	0	2
6000 lm	4000 K	38.5	156	24	498	32.9	182	2	0	2
6000 lm	4000 K	39.4	152	24	498	32.9	182	2	0	2
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	2
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	2
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	2
9000 lm	2700 K	66.1	136	24	842	57.2	157	3	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	3	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	3	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	3	0	3

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: AFR/SPORT N

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	2	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	2	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	2	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	2	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	2	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	2	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	1
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	1
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	1
10500 lm	4000 K	72.4	145	24	924	63.2	166	3	0	1

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T2 medium

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	1
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	1
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	1
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T2 medium + BLC

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	0	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	1	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	1	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	1	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	1
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	1
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	1
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: AFR/SPORT W

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	2	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	2	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	2	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	2	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	2	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	2	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: AFR/SPORT W + BLC

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	1
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	1
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	1
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	1

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T2 wide

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T3 narrow

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	1
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	1
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	1
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T3 narrow + BLC

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	26	24	750	41.5	39	0	0	0
2500 lm	2700 K	17	115	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	118	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	123	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	113	16	466	20.4	172	1	0	0
3500 lm	3000 K	23.8	115	16	454	19.9	176	1	0	0
3500 lm	4000 K	22.6	121	16	432	18.9	185	1	0	0
4500 lm	2700 K	32.2	110	16	612	27.2	165	1	0	0
4500 lm	3000 K	31.2	113	16	594	26.4	170	1	0	0
4500 lm	4000 K	29.7	119	16	566	25.1	179	1	0	0
6000 lm	2700 K	41.5	113	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	111	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	116	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	114	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	122	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	119	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	109	24	688	46.1	163	1	0	1
7500 lm	3000 K	52.5	112	24	668	44.7	168	1	0	1
7500 lm	4000 K	50.1	117	24	636	42.5	176	1	0	1
9000 lm	2700 K	66.1	107	24	842	57.2	157	1	0	1
9000 lm	3000 K	64.1	110	24	818	55.4	162	1	0	1
9000 lm	4000 K	61	116	24	778	52.5	171	1	0	1
10500 lm	4000 K	72.4	114	24	924	63.2	166	1	0	1

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T2 narrow

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	1
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	2
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	2
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	2
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T3 medium

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T3 medium + BLC

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	0	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	1	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	1	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	1	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	1	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	1	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	1	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T4 wide

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	2
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	2
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	2
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T4 wide + BLC

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	22	24	750	41.5	39	0	0	0
2500 lm	2700 K	17	96	16	326	14.1	177	0	0	0
2500 lm	3000 K	16.6	98	16	318	13.7	182	0	0	0
2500 lm	4000 K	15.9	103	16	304	13.1	191	0	0	0
3500 lm	2700 K	24.4	94	16	466	20.4	172	1	0	0
3500 lm	3000 K	23.8	96	16	454	19.9	176	1	0	0
3500 lm	4000 K	22.6	101	16	432	18.9	185	1	0	0
4500 lm	2700 K	32.2	91	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	94	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	99	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	94	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	92	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	97	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	95	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	102	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	99	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	91	24	688	46.1	163	1	0	1
7500 lm	3000 K	52.5	93	24	668	44.7	168	1	0	1
7500 lm	4000 K	50.1	98	24	636	42.5	176	1	0	1
9000 lm	2700 K	66.1	89	24	842	57.2	157	1	0	1
9000 lm	3000 K	64.1	92	24	818	55.4	162	1	0	1
9000 lm	4000 K	61	96	24	778	52.5	171	1	0	1
10500 lm	4000 K	72.4	95	24	924	63.2	166	1	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T4 medium

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T4 medium + BLC

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	0	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	1	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	1	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	1	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	1	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	1	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	1	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	1	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	1	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	1	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	1	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	1	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	1	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T5 square medium

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	143	16	466	20.4	172	2	0	0
3500 lm	3000 K	23.8	147	16	454	19.9	176	2	0	0
3500 lm	4000 K	22.6	155	16	432	18.9	185	2	0	0
4500 lm	2700 K	32.2	140	16	612	27.2	165	2	0	0
4500 lm	3000 K	31.2	144	16	594	26.4	170	2	0	0
4500 lm	4000 K	29.7	152	16	566	25.1	179	2	0	0
6000 lm	2700 K	41.5	145	24	538	35.6	169	2	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	2	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	2	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	2	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	2	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	2	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	3	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	3	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	3	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	3	0	1
9000 lm	3000 K	64.1	140	24	818	55.4	162	3	0	1
9000 lm	4000 K	61	148	24	778	52.5	171	3	0	1
10500 lm	4000 K	72.4	145	24	924	63.2	166	3	0	1

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: T5 Round

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	0
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	0
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	0
3500 lm	2700 K	24.4	143	16	466	20.4	172	2	0	0
3500 lm	3000 K	23.8	147	16	454	19.9	176	2	0	0
3500 lm	4000 K	22.6	155	16	432	18.9	185	2	0	0
4500 lm	2700 K	32.2	140	16	612	27.2	165	2	0	0
4500 lm	3000 K	31.2	144	16	594	26.4	170	2	0	0
4500 lm	4000 K	29.7	152	16	566	25.1	179	2	0	0
6000 lm	2700 K	41.5	145	24	538	35.6	169	2	0	0
6000 lm	2700 K	42.5	141	24	538	35.6	169	2	0	0
6000 lm	3000 K	40.4	149	24	524	34.6	173	2	0	0
6000 lm	3000 K	41.3	145	24	524	34.6	173	2	0	0
6000 lm	4000 K	38.5	156	24	498	32.9	182	2	0	0
6000 lm	4000 K	39.4	152	24	498	32.9	182	2	0	0
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	0
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	0
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	0
9000 lm	2700 K	66.1	136	24	842	57.2	157	3	0	0
9000 lm	3000 K	64.1	140	24	818	55.4	162	3	0	0
9000 lm	4000 K	61	148	24	778	52.5	171	3	0	0
10500 lm	4000 K	72.4	145	24	924	63.2	166	3	0	0

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: Left corner

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	2	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	2	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	2	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	2	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	2	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	2	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S

Optic: Right corner

Lens: Transparent

System					Source			BUG		
Luminous Flux	**Nominal CCT**	**W**	**lm/W**	**n° led**	**mA**	**W**	**lm/W**	**Backlight**	**Uplight**	**Glare**
1600 lm	Amber	48	33	24	750	41.5	39	1	0	0
2500 lm	2700 K	17	147	16	326	14.1	177	1	0	1
2500 lm	3000 K	16.6	151	16	318	13.7	182	1	0	1
2500 lm	4000 K	15.9	157	16	304	13.1	191	1	0	1
3500 lm	2700 K	24.4	143	16	466	20.4	172	1	0	1
3500 lm	3000 K	23.8	147	16	454	19.9	176	1	0	1
3500 lm	4000 K	22.6	155	16	432	18.9	185	1	0	1
4500 lm	2700 K	32.2	140	16	612	27.2	165	1	0	1
4500 lm	3000 K	31.2	144	16	594	26.4	170	1	0	1
4500 lm	4000 K	29.7	152	16	566	25.1	179	1	0	1
6000 lm	2700 K	41.5	145	24	538	35.6	169	2	0	1
6000 lm	2700 K	42.5	141	24	538	35.6	169	2	0	1
6000 lm	3000 K	40.4	149	24	524	34.6	173	2	0	1
6000 lm	3000 K	41.3	145	24	524	34.6	173	2	0	1
6000 lm	4000 K	38.5	156	24	498	32.9	182	2	0	1
6000 lm	4000 K	39.4	152	24	498	32.9	182	2	0	1
7500 lm	2700 K	54	139	24	688	46.1	163	2	0	1
7500 lm	3000 K	52.5	143	24	668	44.7	168	2	0	1
7500 lm	4000 K	50.1	150	24	636	42.5	176	2	0	1
9000 lm	2700 K	66.1	136	24	842	57.2	157	2	0	2
9000 lm	3000 K	64.1	140	24	818	55.4	162	2	0	2
9000 lm	4000 K	61	148	24	778	52.5	171	2	0	2
10500 lm	4000 K	72.4	145	24	924	63.2	166	2	0	2

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.