
NERI

Project location:	Fixture type: Qty:
Project name:	Notes:

ANTARES | POLE | ALUMINUM | ROUND STRAIGHT | MAX 1 LIGHT SOURCE

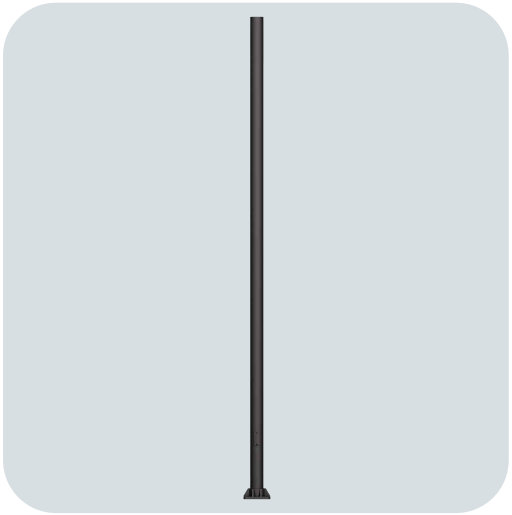

ORDERING INFORMATION / GUIDE

Example**: ANLPSB-U-BF-EPF-GX1-HC0366-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX1** Max 1 light source	**HC0366** 144.016 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0457 180 in	**ZD114114** Base 4.488 - Top 4.488 in	
			HC0549 215.984 in	**ZD127127** Base 5 - Top 5 in	
			HC0640 252.008 in		
			HC0732 287.992 in		

Generated code: **ANLPSB - U** - _ _ - _ _ _ - _ _ _ - _ _ _ _ _ _ - _ _ _ _ _ _ _ _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ANTARES | POLE | ALUMINUM | ROUND STRAIGHT | MAX 1 LIGHT SOURCE

MECHANICAL CHARACTERISTICS

Circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, complete with pole-top attachment, inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

Section: Base/Top 4.016/4.016 in, 4.488/4.488 in, 5/5 in
Hatch size: 2x4 in
Slot height below ground line for cable entry: 2x4 in
Weight: 34-158.01 lb
Finish: Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.