
NERI

Project location:	Fixture type: Qty:
Project name:	Notes:

SHELIAK | POLE | CAST IRON | SMALL | MAX 3 LIGHT SOURCES

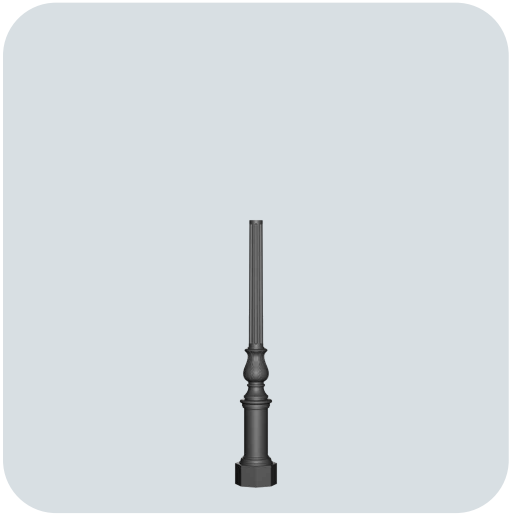

CE

ORDERING INFORMATION / GUIDE

Example**: SH1151000-N-BM-EPD-GF1-HC0318-ZD114060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BM Buried root	**EPD** Decorated	**GC3** Bracket post top entry | Max 3 light sources	**HC0318** 3180 mm	**ZD114060** Base 114 - Top 60 mm	**CN0** Grey [Neri] Textured
BF Flanged		**GE2** Suspended swan neck | Max 2 light sources	**HC0367** 3670 mm		
		GF1 Post top | Max 1 light source			

Generated code: **SH1151000 - N** - _ _ - _ _ _ - _ _ _ - _ _ _ _ _ _ - _ _ _ _ _ _ _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

SHELIAK | POLE | CAST IRON | SMALL | MAX 3 LIGHT SOURCES

MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461. CE-certified pole, compliant with standard UNI EN 40-5.

Section: Base/Top 114/60 mm
Hatch size: 132x38 mm
Height under ground: 600 mm
Slot height below ground line for cable entry: 150x50 mm
Weight: 81-89.9 kg
Finish: Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.