


Antares | Pole | Aluminum | Round step | Max 1 light source

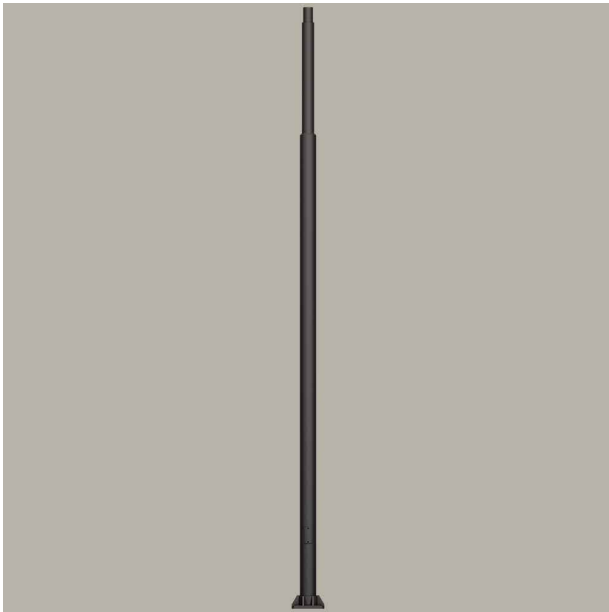

Ordering Information / Guide

Example: ANPORS-U-BF-EPR-GX1-HC0366-ZD102076-CNO

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BF Flanged	EPR Tapered	GX1 Max 1 light source	HC0366 144.016 in	ZD102076 Base 4.016 - Top 2.992 in	CNO Grey [Neri] Textured
			HC0457 180 in	ZD114076 Base 4.488 - Top 2.992 in	
			HC0549 215.984 in	ZD127076 Base 5 - Top 2.992 in	
			HC0640 252.008 in	ZD152114 Base 5.984 - Top 4.488 in	
			HC0732 287.992 in		

Generated code: ANPORS - U - _ _ - _ _ - _ _ _ _ _ - _ _ _ _ _ - _ _ _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Antares | Pole | Aluminum | Round step | Max 1 light source

MECHANICAL CHARACTERISTICS

Round step circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, equipped with a top tenon, slot with inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

Section	Base/Top 4.016/2.992 in, 4.488/2.992 in, 5.984/4.488 in, 5/2.992 in
Hatch size	2x4 in
Slot height below ground line for cable entry	2x4 in
Weight	36.99-158.01 lb
Finish	Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.