


Flush | Pole | Steel | Cylindrical | Max 3 light sources

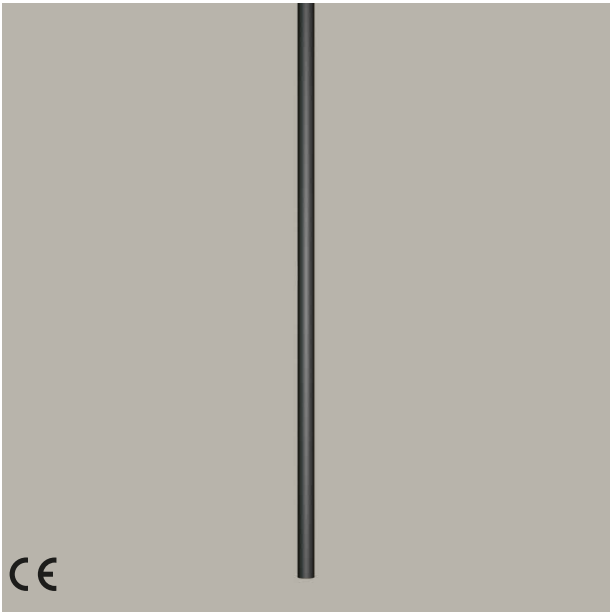

Ordering Information / Guide

Example: FL1119000-N-BM-EPF-GF1-HC0410-ZD076076-CN0

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BM Buried root BF Flanged	EPF Cylindrical	GF1 Post top Max 1 light source	HC0400 4000 mm	ZD076076 Base 76 - Top 76 mm	CN0 Grey [Neri] Textured
		GF2 Post top Max 2 light sources	HC0410 4100 mm	ZD089089 Base 89 - Top 89 mm	
		GF3 Post top Max 3 light sources	HC0500 5000 mm	ZD102102 Base 102 - Top 102 mm	
			HC0510 5100 mm		
			HC0600 6000 mm		
			HC0610 6100 mm		

Generated code: FL1119000 - N - _ _ _ _ _ - _ _ _ _ _ - _ _ _ _ _ - _ _ _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Flush | Pole | Steel | Cylindrical | Max 3 light sources**MECHANICAL CHARACTERISTICS**

Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

Section	Base/Top 102/102 mm, 76/76 mm, 89/89 mm
Hatch size	132x38 mm, 350x72 mm
Height under ground	500 mm, 800 mm
Slot height below ground line for cable entry	132x38 mm
Weight	24.8-46.6 kg
Finish	Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.