NERI

Project location:		Fixture type:	Qty:
Project name:		Notes:	

Antares | Pole | Aluminum | Round straight | Max 1 light source

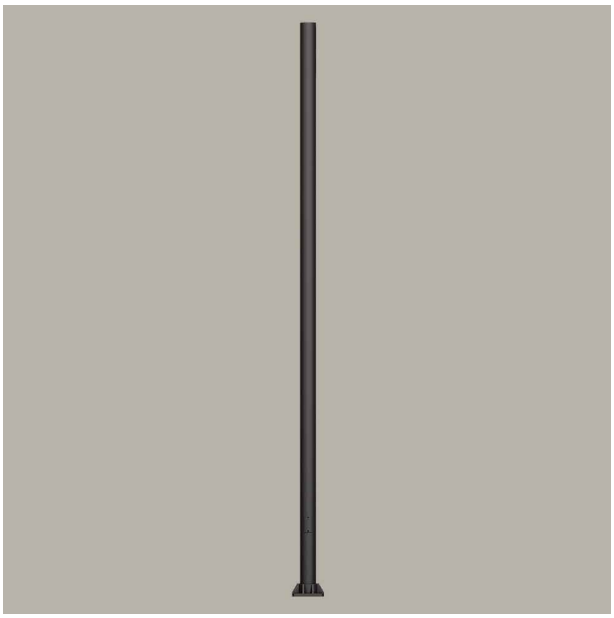

Ordering Information / Guide

Example**: ANLPSB-U-BF-EPF-GX1-HC0366-ZD102102-CN0**

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BF Flanged	**EPF** Cylindrical	**GX1** Max 1 light source	**HC0366** 144.016 in **HC0457** 180 in **HC0549** 215.984 in **HC0640** 252.008 in **HC0732** 287.992 in	**ZD102102** Base 4.016 - Top 4.016 in **ZD114114** Base 4.488 - Top 4.488 in **ZD127127** Base 5 - Top 5 in	**CN0** Grey [Neri] Textured

Generated code: **ANLPSB - U** - _ _ - _ _ _ - _ _ _ - _ _ _ _ _ _ - _ _ _ _ _ _ _ _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

Antares | Pole | Aluminum | Round straight | Max 1 light source

MECHANICAL CHARACTERISTICS

Circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, complete with pole-top attachment, inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

Section	Base/Top 4.016/4.016 in, 4.488/4.488 in, 5/5 in
Hatch size	2x4 in
Slot height below ground line for cable entry	2x4 in
Weight	34-158.01 lb
Finish	Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.