
NERI

Project location:	Fixture type: Qty:
Project name:	Notes:

LYRA | POLE | ALUMINUM | ROUND STEP | MAX 1 LIGHT SOURCE

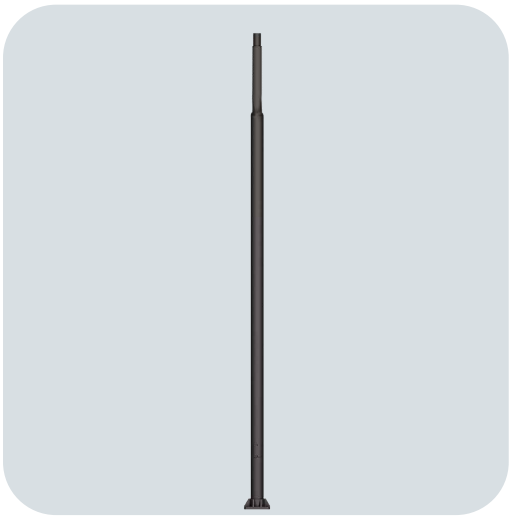

ORDERING INFORMATION / GUIDE

Example**: LYLPRS-U-BF-EPR-GX1-HC0366-ZD102076-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GX1** Max 1 light source	**HC0366** 144.016 in	**ZD102076** Base 4.016 - Top 2.992 in	**CN0** Grey [Neri] Textured
			HC0457 180 in		

Generated code: **LYLPRS - U** - _ _ - _ _ _ - _ _ _ - _ _ _ _ _ _ - _ _ _ _ _ _ _ _ - _ _ _

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

LYRA | POLE | ALUMINUM | ROUND STEP | MAX 1 LIGHT SOURCE

MECHANICAL CHARACTERISTICS

Circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, complete with welded top arm with plastic terminal, inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

Section: Base/Top 4.016/2.992 in
Hatch size: 2x4 in
Slot height below ground line for cable entry: 2x4 in
Weight: 36.99-50.99 lb
Finish: Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.