
NERI

2026





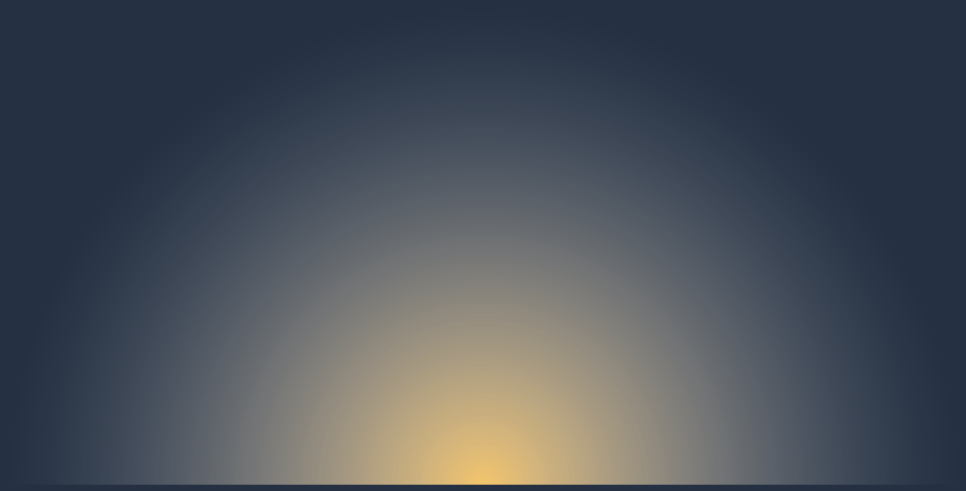

CATALOGUE

luce

Where every place finds its own light.

01

INTRODUCTION

Company 5
North America 6
Fondazione Neri: The Culture of Light 11

Research and Development 13
Neri Smart Site-Specific Light 14

The quality of Italian design 19

02

LIGHTING

Product Index 22
Type Index 26
Collection Index 34

Lighting systems 41

Lighting fixtures 87

Posts 277
Tops 321
Brackets 351
Chandeliers 369

Photometrics 375

Location: 500 County Center - Redwood City, USA
Photographer: Dave Burk © SOM

Architectural project: Skidmore, Owings & Merrill (SOM)



A city is defined by the light it chooses—the way it illuminates its spaces, revealing its identity and how it wishes to be seen.

We believe that the quality of light defines the quality of urban life. That every streetlight, every urban furnishing element, every illuminated square is a cultural choice before being a technical one. That designing public space means caring for people, transforming it into a place of encounter and connection.

The city itself becomes culture

Founded in 1962, the company is rooted in a deep and enduring connection with art and a sense of proportion, the legacy of Domenico Neri's vision—founder and first interpreter of a design language capable of elevating lighting and urban furniture into an expression of cultural value.

A distinctive identity that has, over time, become a recognized benchmark of excellence, exported worldwide.

Today, Neri is a benchmark for thousands of Italian municipalities as well as for hospitality, residential and commercial environments, contributing to the definition of spatial identity and quality. Restoration, faithful reproductions, bespoke solutions and collaborations with architects, lighting designers and energy managers make up the company's offering, present in over 100 countries and capable of combining tradition with a contemporary vision.

A culture of light, shaped for the Americas

Established in 2012, Neri North America carries this heritage into the Americas, translating a longstanding approach to public space into a distinct local presence. Based in Miami, our team combines the design expertise and manufacturing culture of our Italian headquarters with a deep understanding of the standards, requirements and expectations of the North American market.

Global heritage. Local commitment.

The result is a collection that moves naturally between memory and innovation. Traditional cast-iron forms coexist with contemporary designs, while lighting, street furniture and outdoor structures become part of a broader language for shaping streets, parks, plazas, hospitality environments and civic spaces.
Across the Americas, Neri products have found their place in environments where identity matters—places recognized not only for their architecture, but also for the way they are experienced. Each project is an opportunity to bring greater clarity, continuity and character to that experience



Location: Chicago
Photographer: Antonio Neri

Architectural project: 10 & 120 South Riverside Plaza, Chicago, IL

Location: Loews Miami Beach Hotel, Miami
Photographer: Antonio Neri








Location: Museo Italiano della Ghisa (MIG)
Photographer: Antonio Neri


Founded in 2005 as a non-profit cultural organization, the Fondazione Neri preserves and enhances a unique collection, positioning itself as a center for research and reflection on the city in both its historical and contemporary dimensions. Its focus is on those elements which, alongside architecture, have contributed to defining urban identity over time: public lighting and street furniture—essential fixtures in the design of collective spaces.

The Foundation investigates and promotes the expressions of industrial art and culture, maintaining a continuous dialogue between memory and innovation, from 19th-century cast-iron artifacts to the latest forms of contemporary design and the evolution of light in the city. The museum exhibitions are complemented by a rich archive of documents and images. This heritage makes it a one-of-a-kind institution, a point of reference for scholars, universities, architects, and lighting designers dedicated to exploring the cultural value of the elements that silently shape the face of our cities.

Arredo & Città is the Fondazione Neri's biannual magazine dedicated to initiatives, debates, and research on the design and stylistic evolution of street furniture and urban lighting. Since 1988, through in-depth monographs and rich photographic repertories, it has focused on the recovery and enhancement of urban heritage—a matter of fundamental interest for both historical research and new design projects.







Location: Laboratori Neri - Longiano, Italy
Photographer: Neri



Where intuition meets light, innovation and the future are born.

Over two hundred patents and a quarter of the team dedicated to research, development and technology: at Neri, innovation is a method.

The laboratories are the heart of this process—environments where products are tested under simulated, amplified and extreme conditions, to precisely measure their performance and effects.


Among the facilities are advanced and, in some cases, unique instruments within the European landscape, including one of the largest and fastest goniophotometers operating in Europe, capable of analysing with extreme precision the light distribution emitted by a lighting fixture.

The most evocative setting is the Lightroom: an immersive environment where clients and designers explore each new idea until they can perceive its real impact on visual comfort—from the driver to the pedestrian walking along a seafront promenade. A space that also functions as an open laboratory, often at the centre of collaborations with universities and technical institutes.

Where every place finds its light, a new balance between people, city and nature takes shape.

Neri Smart Site-Specific Light is an intelligent and sustainable urban lighting system, designed to enhance quality of life and elevate the context in which it is placed.

An approach that recognises the uniqueness of every space in terms of aesthetics, functionality and environmental impact, making it the starting point of every intervention.

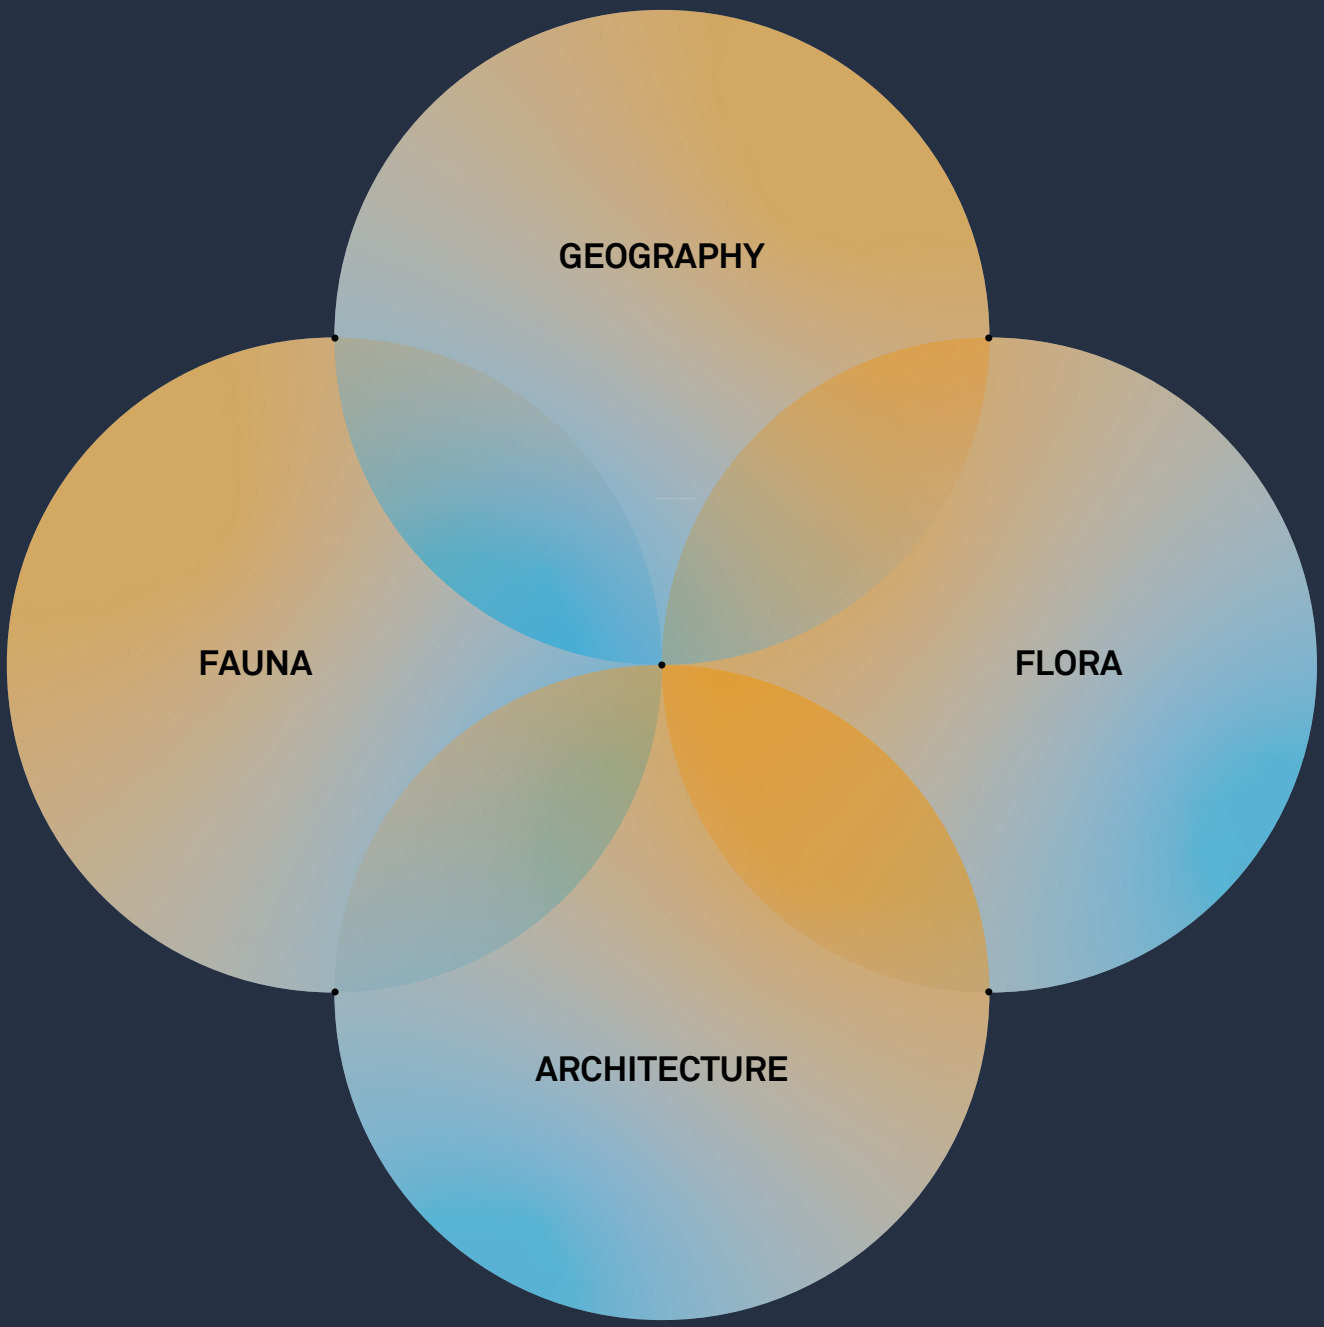
GEOGRAPHY
FAUNA
FLORA
ARCHITECTURE

The new renaissance of light

A design approach that places people back at the centre: technology and sensitivity come together to create elegant and functional systems, capable of enhancing the urban fabric without ever neglecting the well-being of those who inhabit it. Every intervention becomes a conscious gesture, carefully calibrated to the specific characteristics of each place.

The intelligent solution

The system integrates next-generation LEDs, smart sensors, solar panels, wireless networks and adaptive learning models, with the aim of reducing energy consumption, CO_2 emissions and light pollution, while increasing safety and efficiency.


The choice of colour temperature follows the guidelines of the Krueger-Kruithof model, a well-established reference in lighting design adapted to the needs of people, flora and fauna. The result is lighting tuned to circadian rhythms, making environments healthier, more welcoming and more sustainable.

Ligth is dynamic: intensity and colour temperature are modulated to optimise visual comfort and reduce the impact on ecosystems. Colour selection also becomes a tool for environmental protection—amber light, for example, limits interference with natural habitats.

The Range

A collection of solutions designed to interact with urban, residential and natural environments. Systems that blend into the landscape, adjusting intensity and tone in relation to the cycles of day and night. Light as an active element in shaping atmosphere: able to accompany and protect, without ever imposing itself.

Light that benefits
both the planet and people

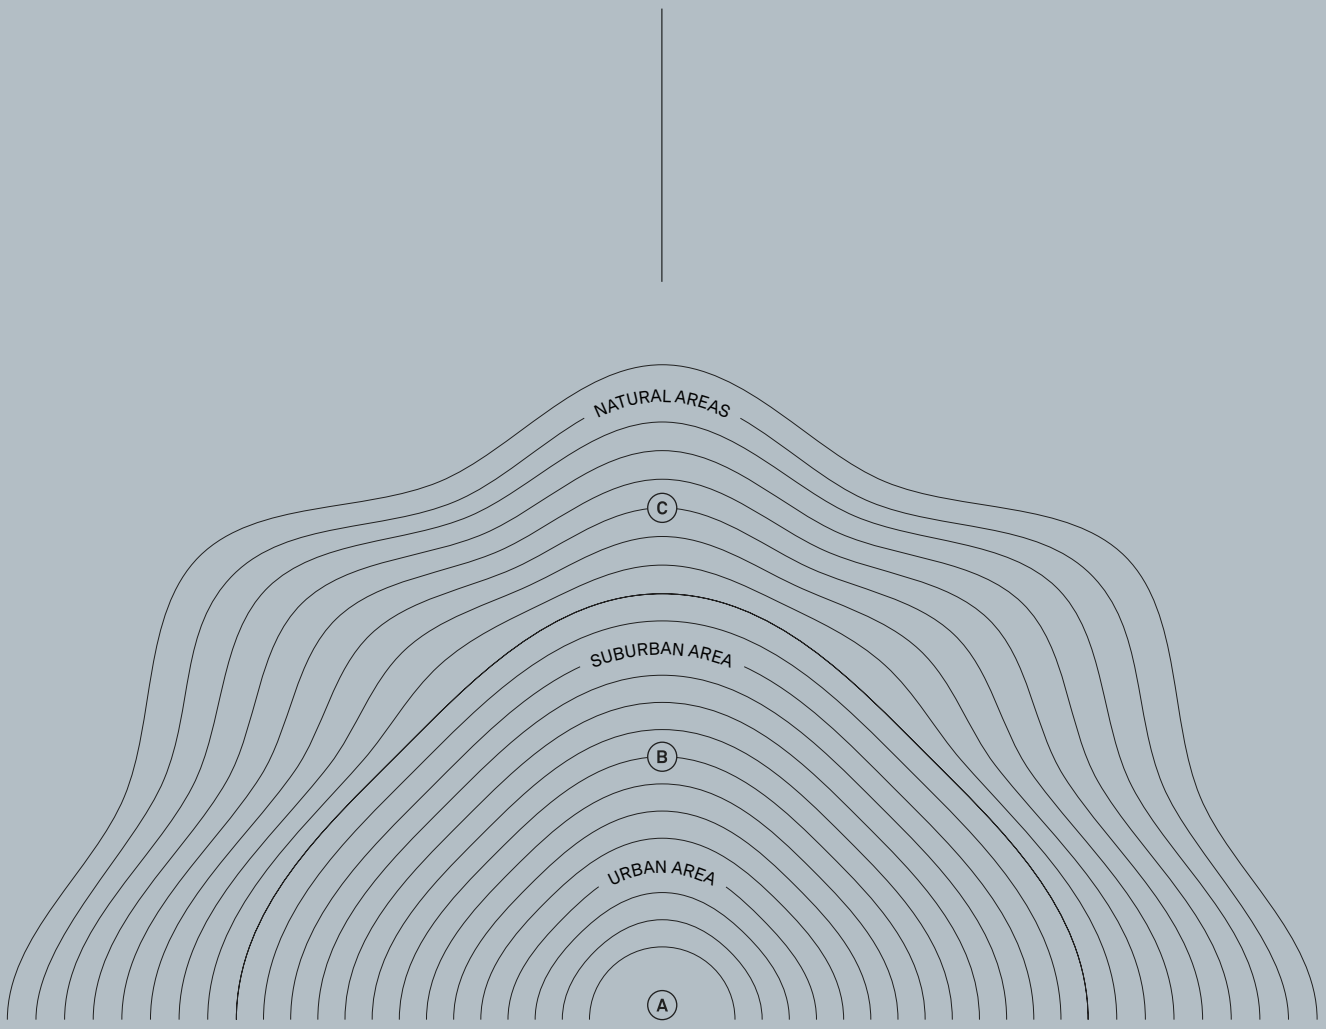

A · URBAN AREA
KRUITHOF LIGHT

A system designed to adapt to the needs of those living in urban areas, respecting the biological rhythm of natural light.

B · SUBURBAN AREA
ADJUSTMENT LIGHT

A system that embraces the tranquillity of residential zones, respecting the harmony of surrounding ecosystems.

C · NATURAL AREAS
PURE AMBER

A system designed to protect nature and wildlife, offering a harmonious balance between human needs and species conservation.

GEOGRAPHICAL POSITION
Latitude and Longitude

Every place has unique characteristics. For this reason, Neri technologies take geographical position into account to configure their lighting systems.

AREA OF INTEREST
Installation zones

The installation site is used to determine which type of technology can be applied to achieve the best possible results, respecting both people and nature.

Location: Sperlonga, Italy
Photographer: Antonio Neri



The quality of Italian design

Since 1962, we have interpreted Italian excellence in lighting and urban furniture through a balance between artisanal tradition, design and technological innovation. Every project stems from a deep understanding of the historical, architectural and environmental context, with the aim of respecting and enhancing urban space, not simply illuminating it.

Material quality, craftsmanship and rigorous production processes are combined with a constant investment in research and development: to engineer low-impact solutions, improve visual comfort and integrate intelligent systems for the contemporary city.

Our international vocation leads Neri to engage with highly diverse contexts, while maintaining a recognisable language: attention to detail, aesthetics and performance, beauty and functionality in balance.

Restoration as a cultural act

For Neri, Designed in Italy finds its most authentic expression in the recovery of historical heritage. An approach that combines industrial archaeology, artisanal mastery and modern engineering to bring back to life artefacts that belong to urban memory. **Not preservation, but cultural continuity.**

This value now extends to sustainability: durable materials, efficient solutions, reduction of environmental impact and light pollution redefine the way urban design is interpreted.

With projects in over 60 countries, Neri exports a culture of light capable of adapting to diverse climates and scenarios—offering designers tailor-made solutions where Italian craftsmanship meets the scalability of cutting-edge industrial production.



Location: 500 County Center - Redwood City, USA
Photographer: Dave Burk © SOM

Architectural project: Skidmore, Owings & Merrill (SOM)


Index

Product

LIGHTING SYSTEMS



Nebula 42


Pictor 66

LUMINAIRES



Antares 88


Chara 98


Hydra 102


Lang 106


Light 21 112


Light 500 118


Light 600 124


Light 700 130


Light 804 136



Lyra 142



Nebula L 146



Nebula S 150


Nebula Venezia 154



Nebula Compact L 158



Nebula Compact S 162



Pixis Top 166



Pixis Lateral 172




Pixis Surface 178


Nova 184



Nova M 188

Nova S 192


Polis Lateral 196


Polis Catenary 200


Polis Suspended 204


Polis Top 208

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

LUMINAIRES



Nebula Bollard 212


Nebula Pathlight 222


Pictor Bollard 228



Polis Bollard 242


Brenta Applique 256



Brenta Bollard 262


Brenta Pathlight 270

POLES | TOPS | WALL BRACKETS | CHANDELIERS


Alcor 278


Alkes 281



Antares 282



Castore 284


Chara 285

Flush 286


Heka 288


Kuma 289



Lyra 291


Maia 293


Matar 296



Mizar 298



Nebula 299



Nebula Essential 303



Nova 307


Propus 308



Saiph 309


Sheliak 310


Tabit 317


Alcor 322

POLES | TOPS | WALL BRACKETS | CHANDELIERS



Antares 323


Castore 324



Chara 325


4100.050 327



4101.100 328



4100.160.500 329


4006.330 330


Flush 331


Heka 332



Kuma 333



Lyra 337


Maia 338


Mizar 340


Nova M 343


Propus 345


Saiph 347



Sheliak 348



Maia 352


Alcor 355



Castore 356


Heka 357


Kuma 358



Lyra 360


Nova 361


Sheliak 362


Tabit 365


Castore 370


Nashira 371


Sheliak 373

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

Index

Type

PATHLIGHTS


Nebula Pathlight 222


Brenta Pathlight 270

ILLUMINATING BOLLARDS


Nebula Bollard 212


Pictor Bollard 228



Polis Bollard 242


Brenta Bollard 262

SURFACE MOUNTED LUMINAIRES


Brenta Applique 256

WALL MOUNTED LUMINAIRES


Chara 98


Light 21 112



Light 500 118


Light 600 124


Light 700 130

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

WALL MOUNTED LUMINAIRES



Light 804 136


Nova 184



Nova M 188


Nova S 192


Polis Suspended 204

PROJECTORS



Nebula L 146



Nebula S 150


Nebula Venezia 154



Nebula Compact L 158



Nebula Compact S 162



Pixis Surface 178

POST TOP LUMINAIRES



Antares 88


Hydra 102


Lang 106


Light 21 112


Light 500 118


Light 600 124


Light 700 130


Light 804 136



Lyra 142



Pixis Top 166

POST TOP LUMINAIRES



Pixis Lateral 172


Polis Lateral 196


Polis Top 208

POST TOP LUMINAIRES WITH ARMS



Antares 88


Chara 98


Light 21 112


Light 500 118


Light 600 124


Light 700 130


Light 804 136


Nova 184



Nova M 188


Nova S 192


Polis Lateral 196

SUSPENDED LUMINAIRES


Chara 98


Light 21 112


Light 500 118


Light 600 124


Light 700 130

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

SUSPENDED LUMINAIRES


Light 804 136


Nova 184


Nova S 192


Polis Suspended 204

LUMINAIRES FOR CATENARY SYSTEMS


Chara 98


Light 21 112


Light 500 118


Light 600 124


Light 700 130


Light 804 136


Nova 184



Nova S 192


Polis Catenary 200

POSTS


Alcor 278


Alkes 281



Antares 282



Castore 284


Chara 285

Flush 286


Heka 288


Kuma 289



Lyra 291


Maia 293

POSTS


Matar 296



Mizar 298



Nebula 299



Nebula Essential 303



Nova 307


Propus 308



Saiph 309


Sheliak 310


Tabit 317

TOPS


Alcor 322



Antares 323


Castore 324


Chara 325


4100.050 327



4101.100 328



4100.160.500 329


4006.330 330


Flush 331


Heka 332


Kuma 333



Lyra 337


Maia 338


Mizar 340


Nova M 343


Propus 345


Saiph 347


Sheliak 348

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

WALL BRACKETS



Maia 352


Alcor 355



Castore 356


Heka 357



Kuma 358



Lyra 360


Nova 361


Sheliak 362


Tabit 365

LIGHTING SYSTEMS



Nebula 42


Pictor 66

CHANDELIERS


Castore 370


Nashira 371


Sheliak 373

Index

Collection

NEBULA



Nebula Lighting System 42



Nebula L Luminaire 146



Nebula S Luminaire 150


Nebula Venezia Luminaire 154



Nebula Compact L Luminaire 158




Nebula Compact S Luminaire 162


Nebula Bollard Luminaire 212



Nebula Pathlight Luminaire 222

PICTOR


Pictor Lighting System 66


Pictor Bollard Luminaire 228

BRENTA


Brenta Applique Luminaire 256


Brenta Bollard Luminaire 262


Brenta Pathlight Luminaire 270

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

NOVA




Nova 184
Luminaire




Nova M 188
Luminaire


Nova S 192
Luminaire



Nova 307
Pole



Nova M 343
Top



Nova 361
Wall shelf

ALCOR



Alcor 278
Pole



Alcor 322
Top



Alcor 355
Wall shelf

ALKES



Alkes 281
Pole

CASTORE



Castore Pole 284



Castore Top 324



Castore Wall shelf 356



Castore Chandelier 370

CHARA



Chara Luminaire 98



Chara Pole 285



Chara Top bracket 325

HEKA



Heka Pole 288



Heka Top 332




Heka Wall shelf 357

KUMA



Kuma Pole 289



Kuma Top 333



Kuma Wall shelf 358

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

MAIA



Maia 293
Pole



Maia 338
Top



Maia 352
Wall shelf

MATAR



Matar 296
Pole

MIZAR



Mizar 298
Pole



Mizar 340
Top

PROPUS



Propus 308
Pole



Propus 345
Top bracket

SAIPH



Saiph 309
Pole



Saiph 347
Top bracket

SHELIAK



Sheliak 310
Pole



Sheliak 348
Top



Sheliak 362
Wall shelf



Sheliak 373
Chandelier

TABIT




Tabit 317
Pole



Tabit 365
Wall shelf

QSP: Quick Ship Program. A selection of Neri products assembled in the USA and available with shorter lead times.

Catalogue

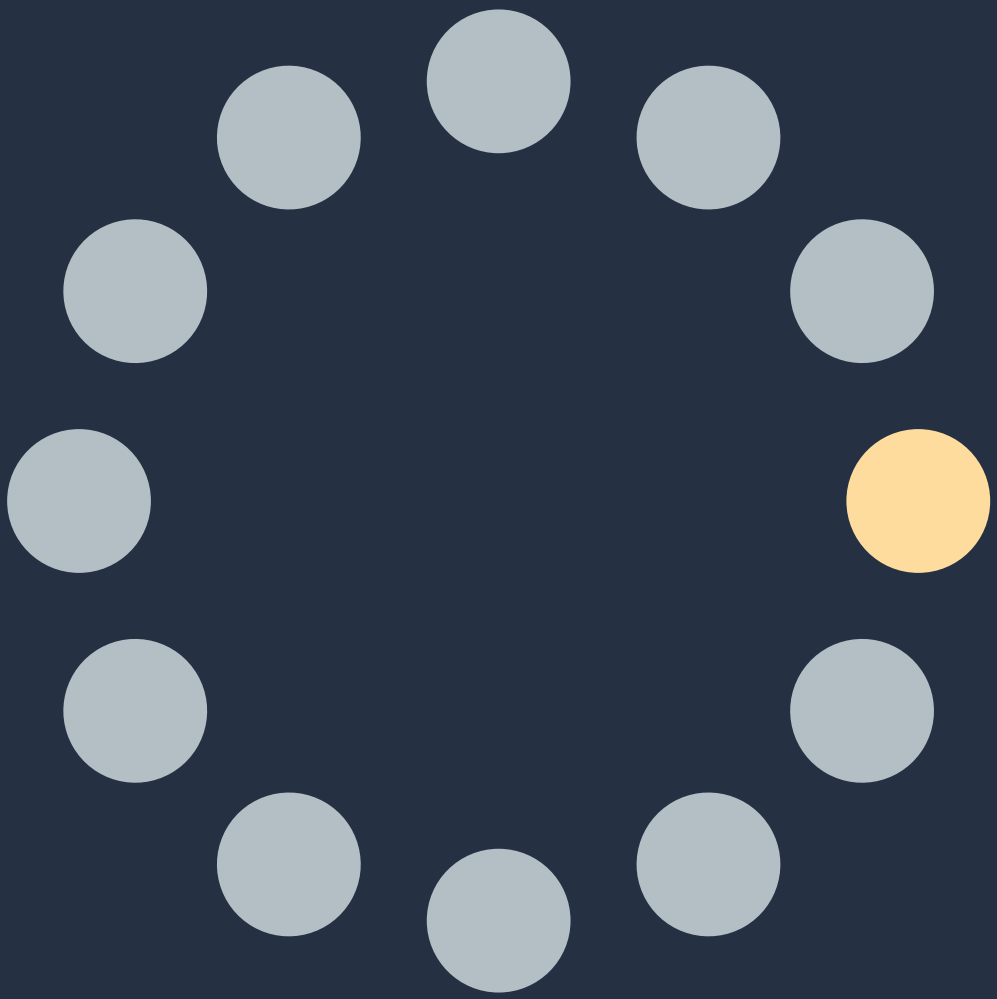


Lighting

Systems



Nebula

NEBULA

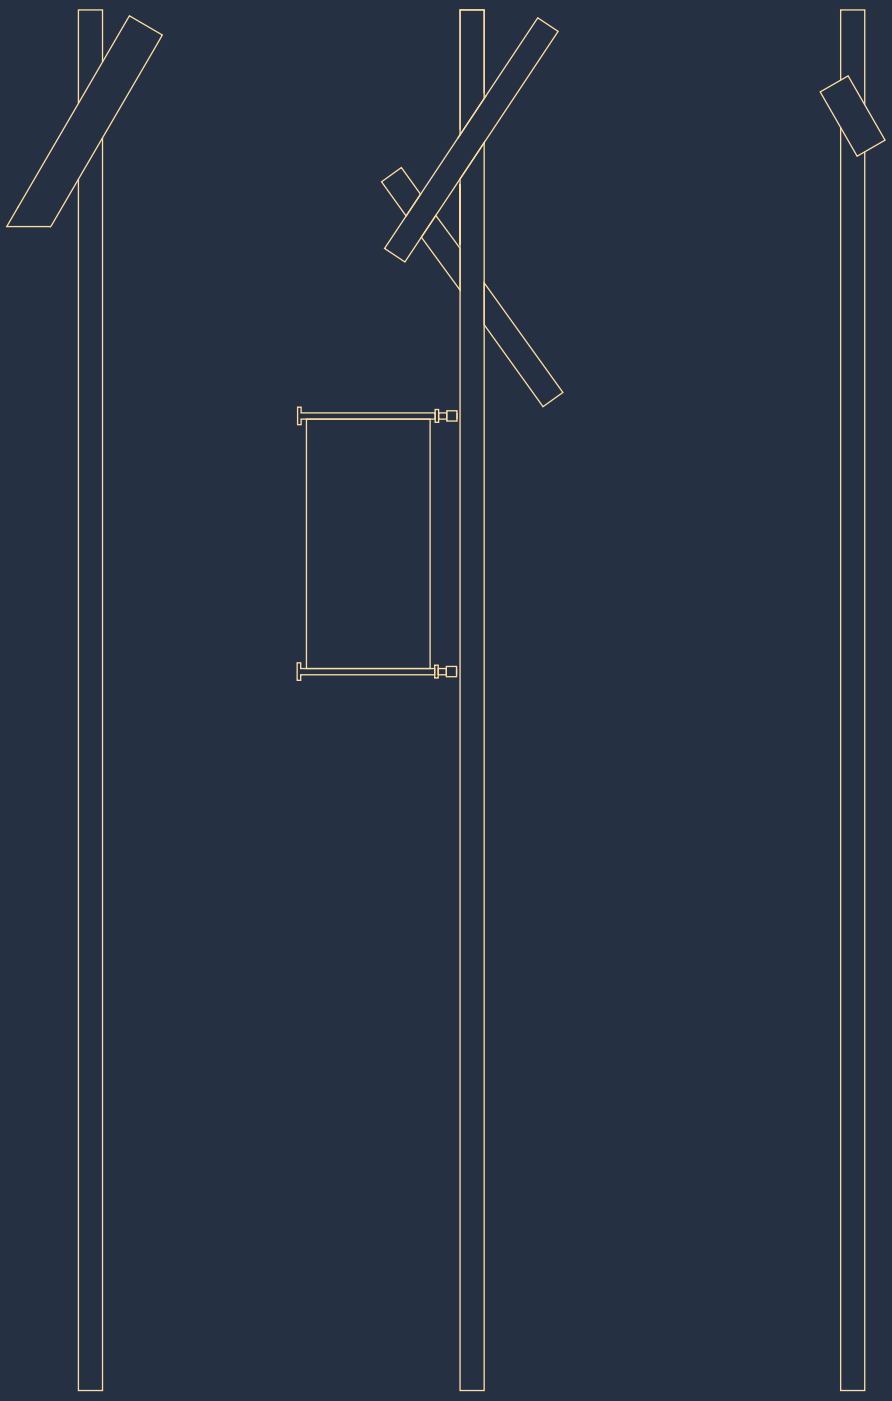

Nebula is the urban lighting collection designed in collaboration with the American architecture firm Skidmore, Owings & Merrill (SOM). Designed for every public space, it integrates seamlessly into both historic and contemporary settings.




Location: Olympic Village - Milano, Italia
Photographer: Dave Burk © SOM

Architectural project: Skidmore, Owings & Merrill (SOM)
Landscape design/project: Michel Desvigne Paysagiste
Lighting design project: Cannata&Partners Lighting Design




NEBULA SYSTEM

The lighting system features five luminaires and two poles available in four different heights: 15′, 18′, 21′, and 24′.

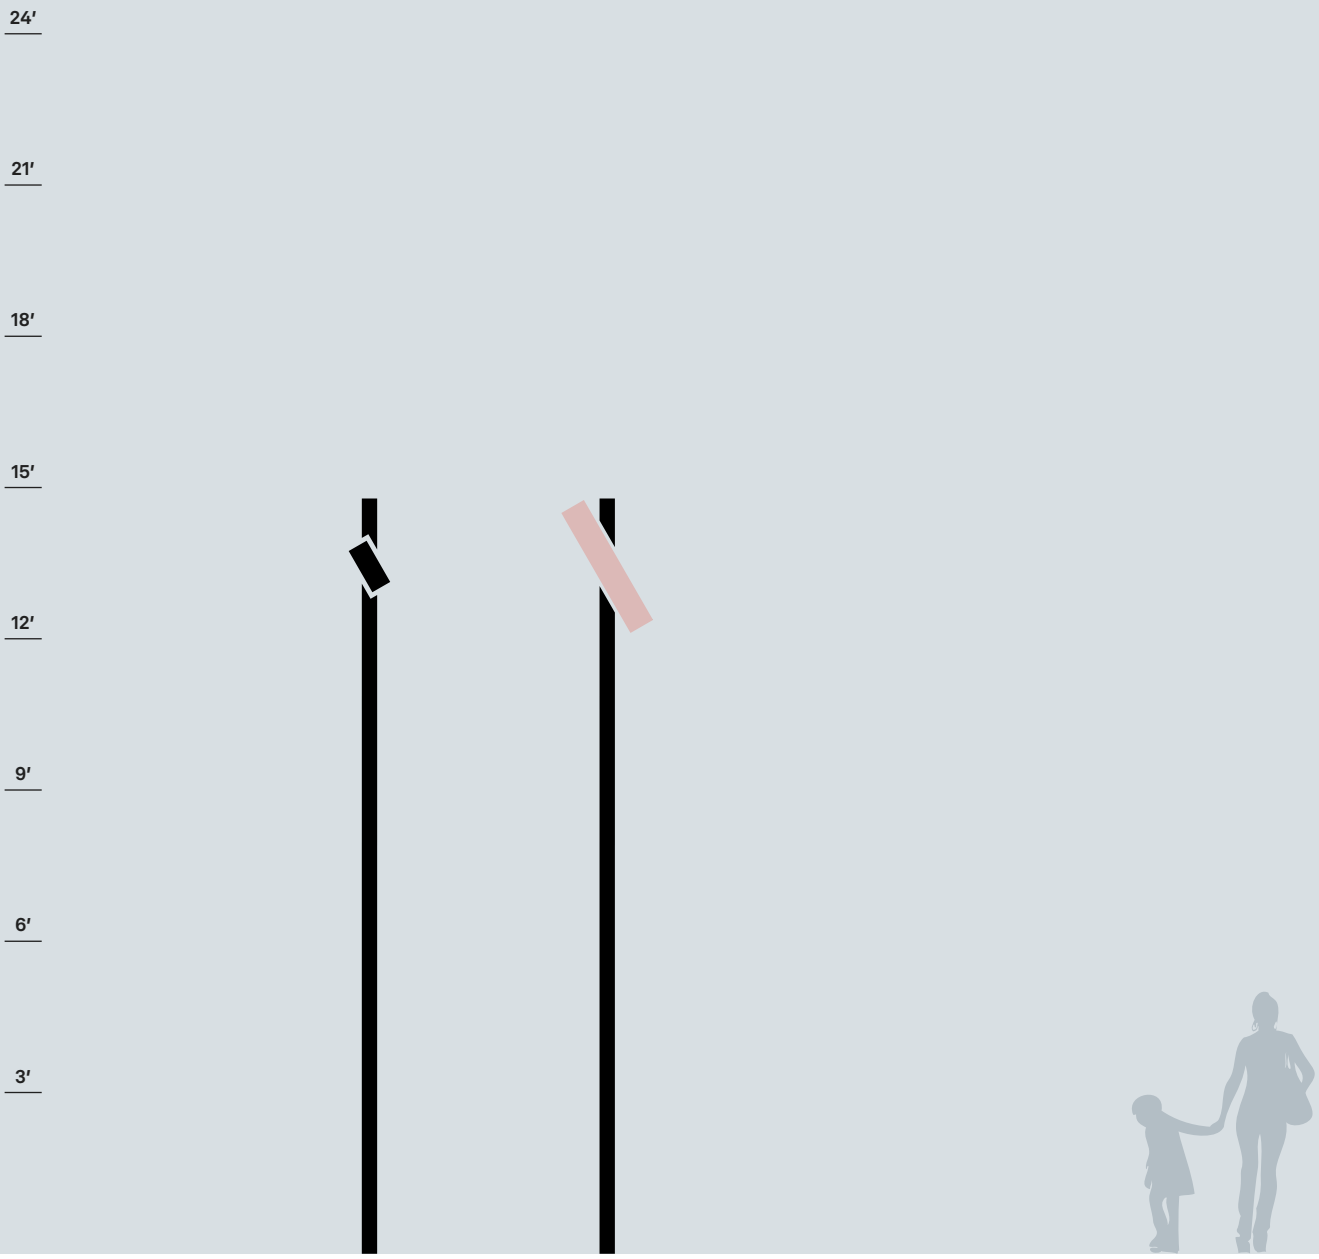

Nebula Compact L
Luminaire
Pole height: 15′,
Ø 4″

Nebula Venezia
Luminaire
Pole height: 15′,
Ø 4″

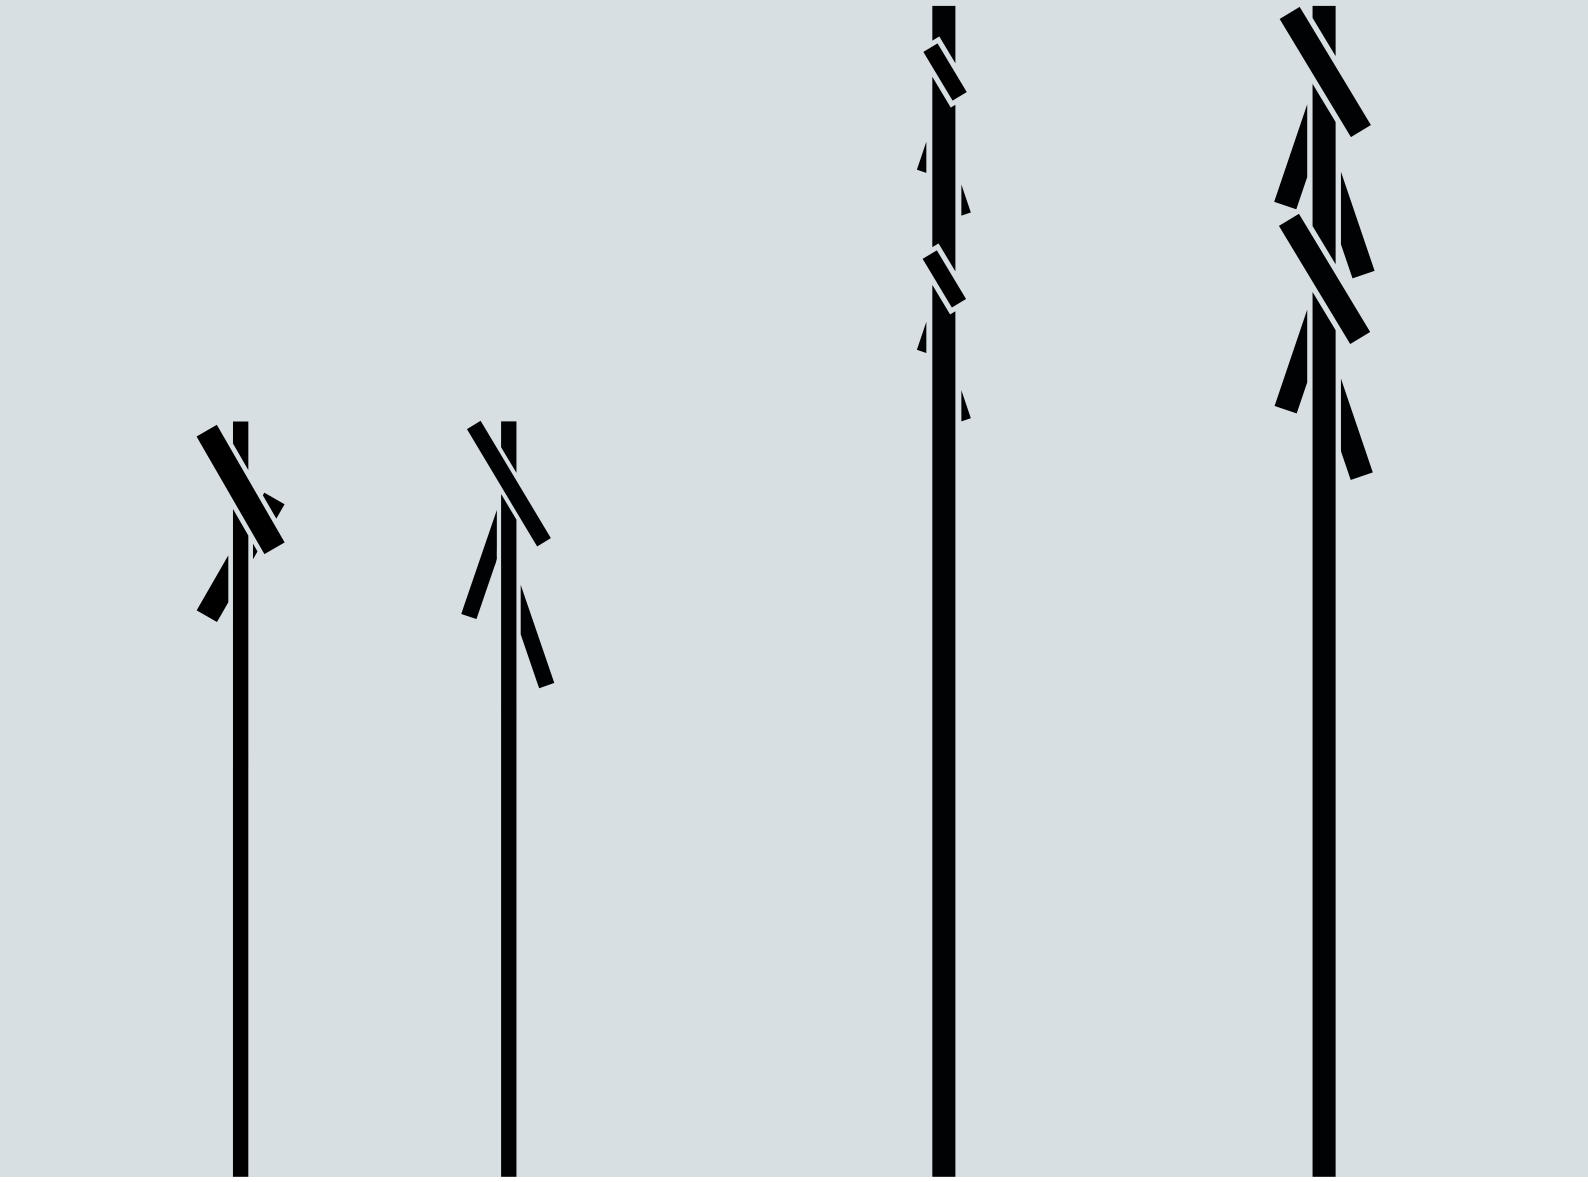

Two Nebula Large
Luminaires
Pole height: 15′,
Ø 4″

Three Nebula Small
Luminaires
Pole height: 15′,
Ø 4″

Six Nebula Compact S
Luminaires
Pole height: 24′,
Ø 6″

Six Nebula Large
Luminaires
Pole height: 24′,
Ø 6″

NEBULA ACCESSORIES

The Nebula lighting system has been designed to integrate accessories such as: anti-glare reflector, banner arm, planter, NEMA socket, presence sensors, photocells, cameras, sound system, and base cover.

24′

21′

18′


15′

12′

9′

6′

3′



Nebula Large
Luminaire
with anti-glare reflector



Nebula Large
Luminaire
with banner arm



Nebula Large
Luminaire
with planter

The exceptional flexibility of the Nebula lighting system is a powerful tool for developing ambitious and efficient lighting designs.




SYSTEM FEATURES

Designing with the modular Nebula system is simple. The parameters to consider during configuration are listed and explained in this guide.


1. Luminaires

Select the required luminaire sizes and quantity.


The system comprises five luminaires: Nebula Small (S), Nebula Large (L), Nebula Venezia (V), Nebula Compact S, and Nebula Compact L.

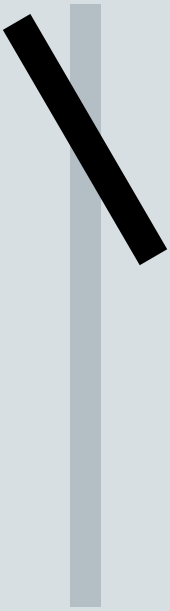


Nebula Small
Length 3′
Ø 4″

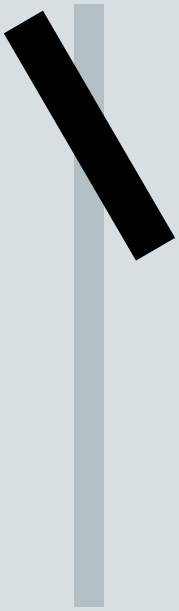


Nebula Large
Length 3′
Ø 6″

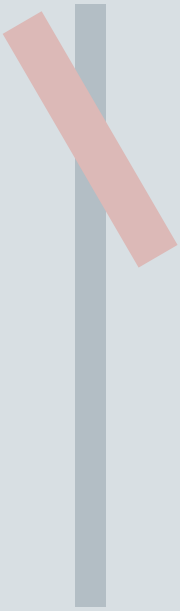

Nebula Venezia
Length 3′
Ø 6″




Nebula Compact S
Length 1.15′
Ø 4″



Nebula Compact L
Length 1.15′
Ø 6″

2. Pole height and diameter


It is possible to choose between two diameters and four standard heights.

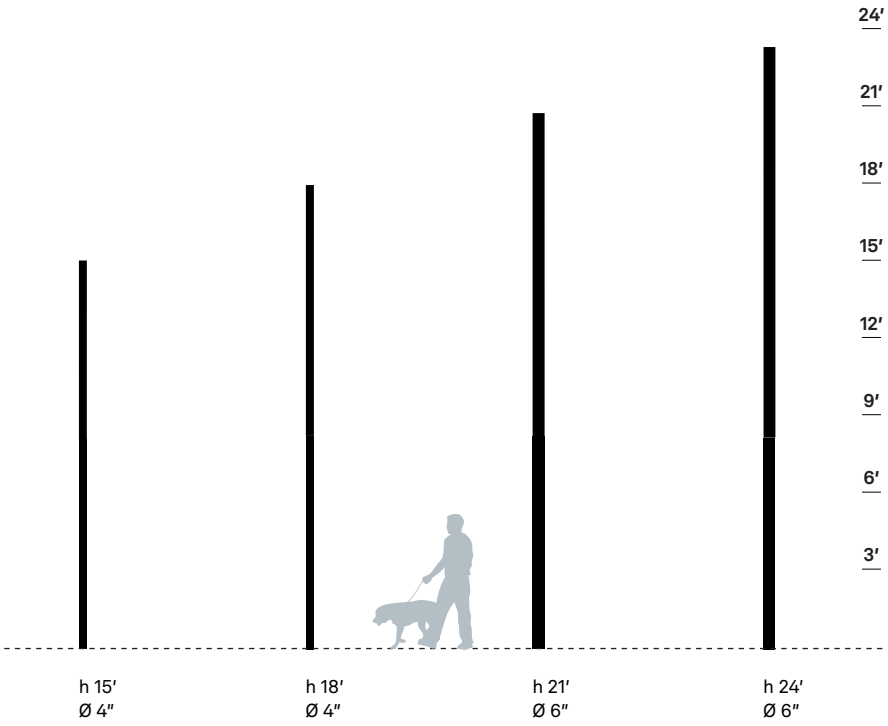


3. Rings

Different heights correspond to a different number of available rings.
The rings are the fixing devices for luminaires and accessories on the pole.

The diagram on the right shows the maximum number of rings available for each pole.
Each ring can accommodate up to two luminaires and/or accessories.
Once the pole height has been identified, the number of rings, their position, and the number of luminaires or accessories per ring must be specified.

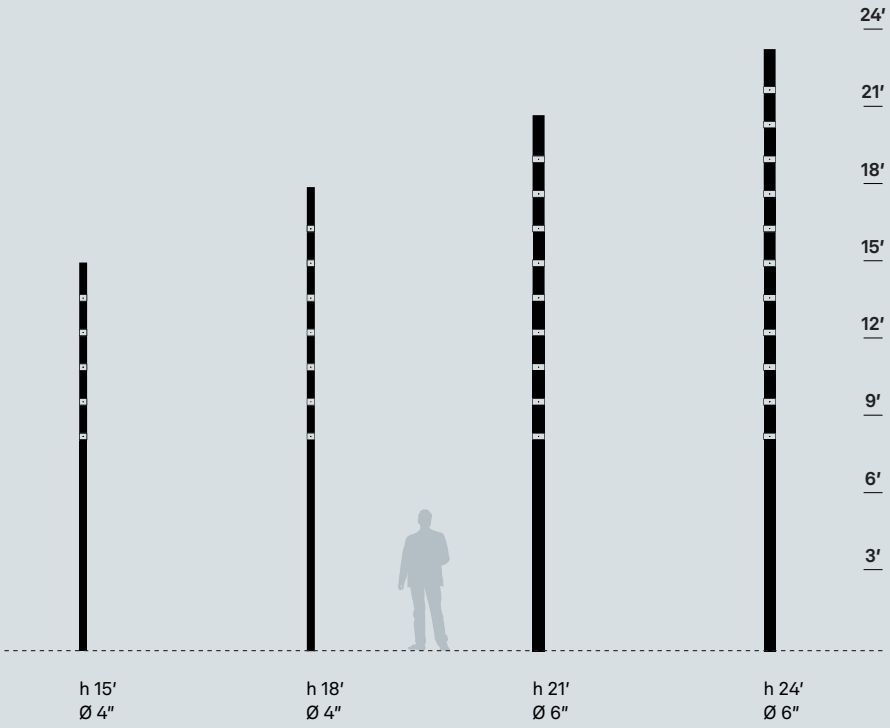


It is recommended to install accessories rather than luminaires on the first two lower rings, while all other rings can be used for either.

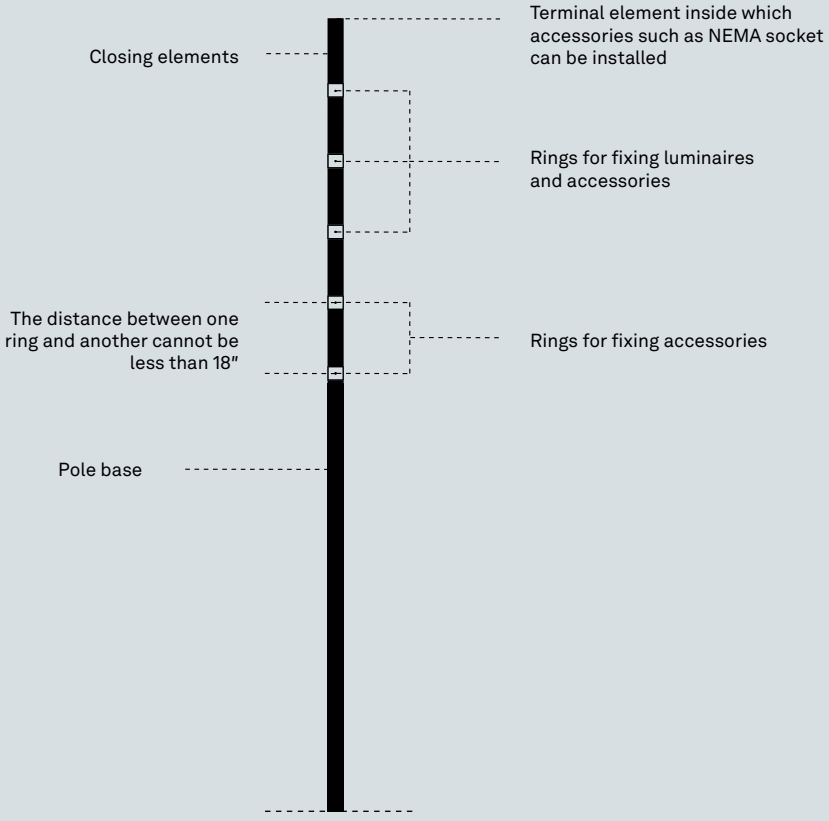

5. Colour

The standard colour for the system is Neri Grey. The other available colours are: pure white, aluminium white, aluminium grey, jet black, moss green.

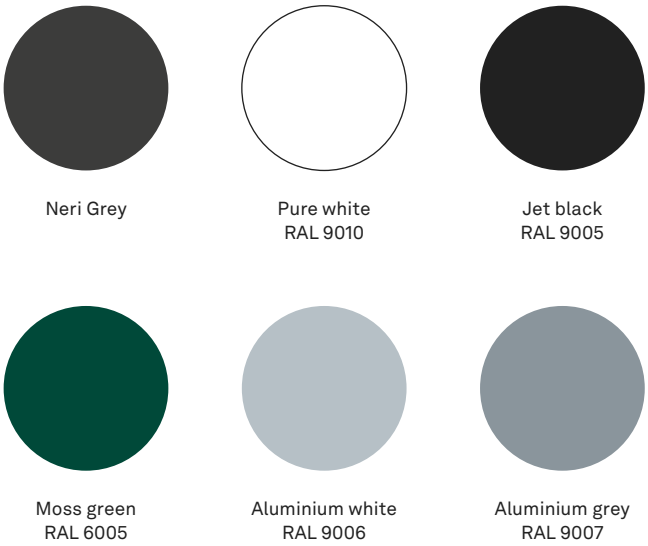

Neri Grey

Pure white
RAL 9010

Jet black
RAL 9005

Moss green
RAL 6005

Aluminium white
RAL 9006

Aluminium grey
RAL 9007

NEBULA LIGHTING SYSTEM

With five luminaires that can be rotated or tilted, four different poles in terms of height and diameter, an extensive optical package, various colour temperatures and driver functions, as well as a range of finishes to choose from, the modularity and sophisticated design of the Nebula system stimulate creativity while ensuring excellent performance across a wide range of applications.


1



2



1. Banner arm
2. Planter
3. Pole
4. Ring
5. Nebula S
6. Nebula L
7. Nebula V
8. Nebula Compact S
9. Nebula Compact L
10. Small 30° anti-glare reflector
11. Large 30° anti-glare reflector
12. Small 45° anti-glare reflector
13. Large 45° anti-glare reflector

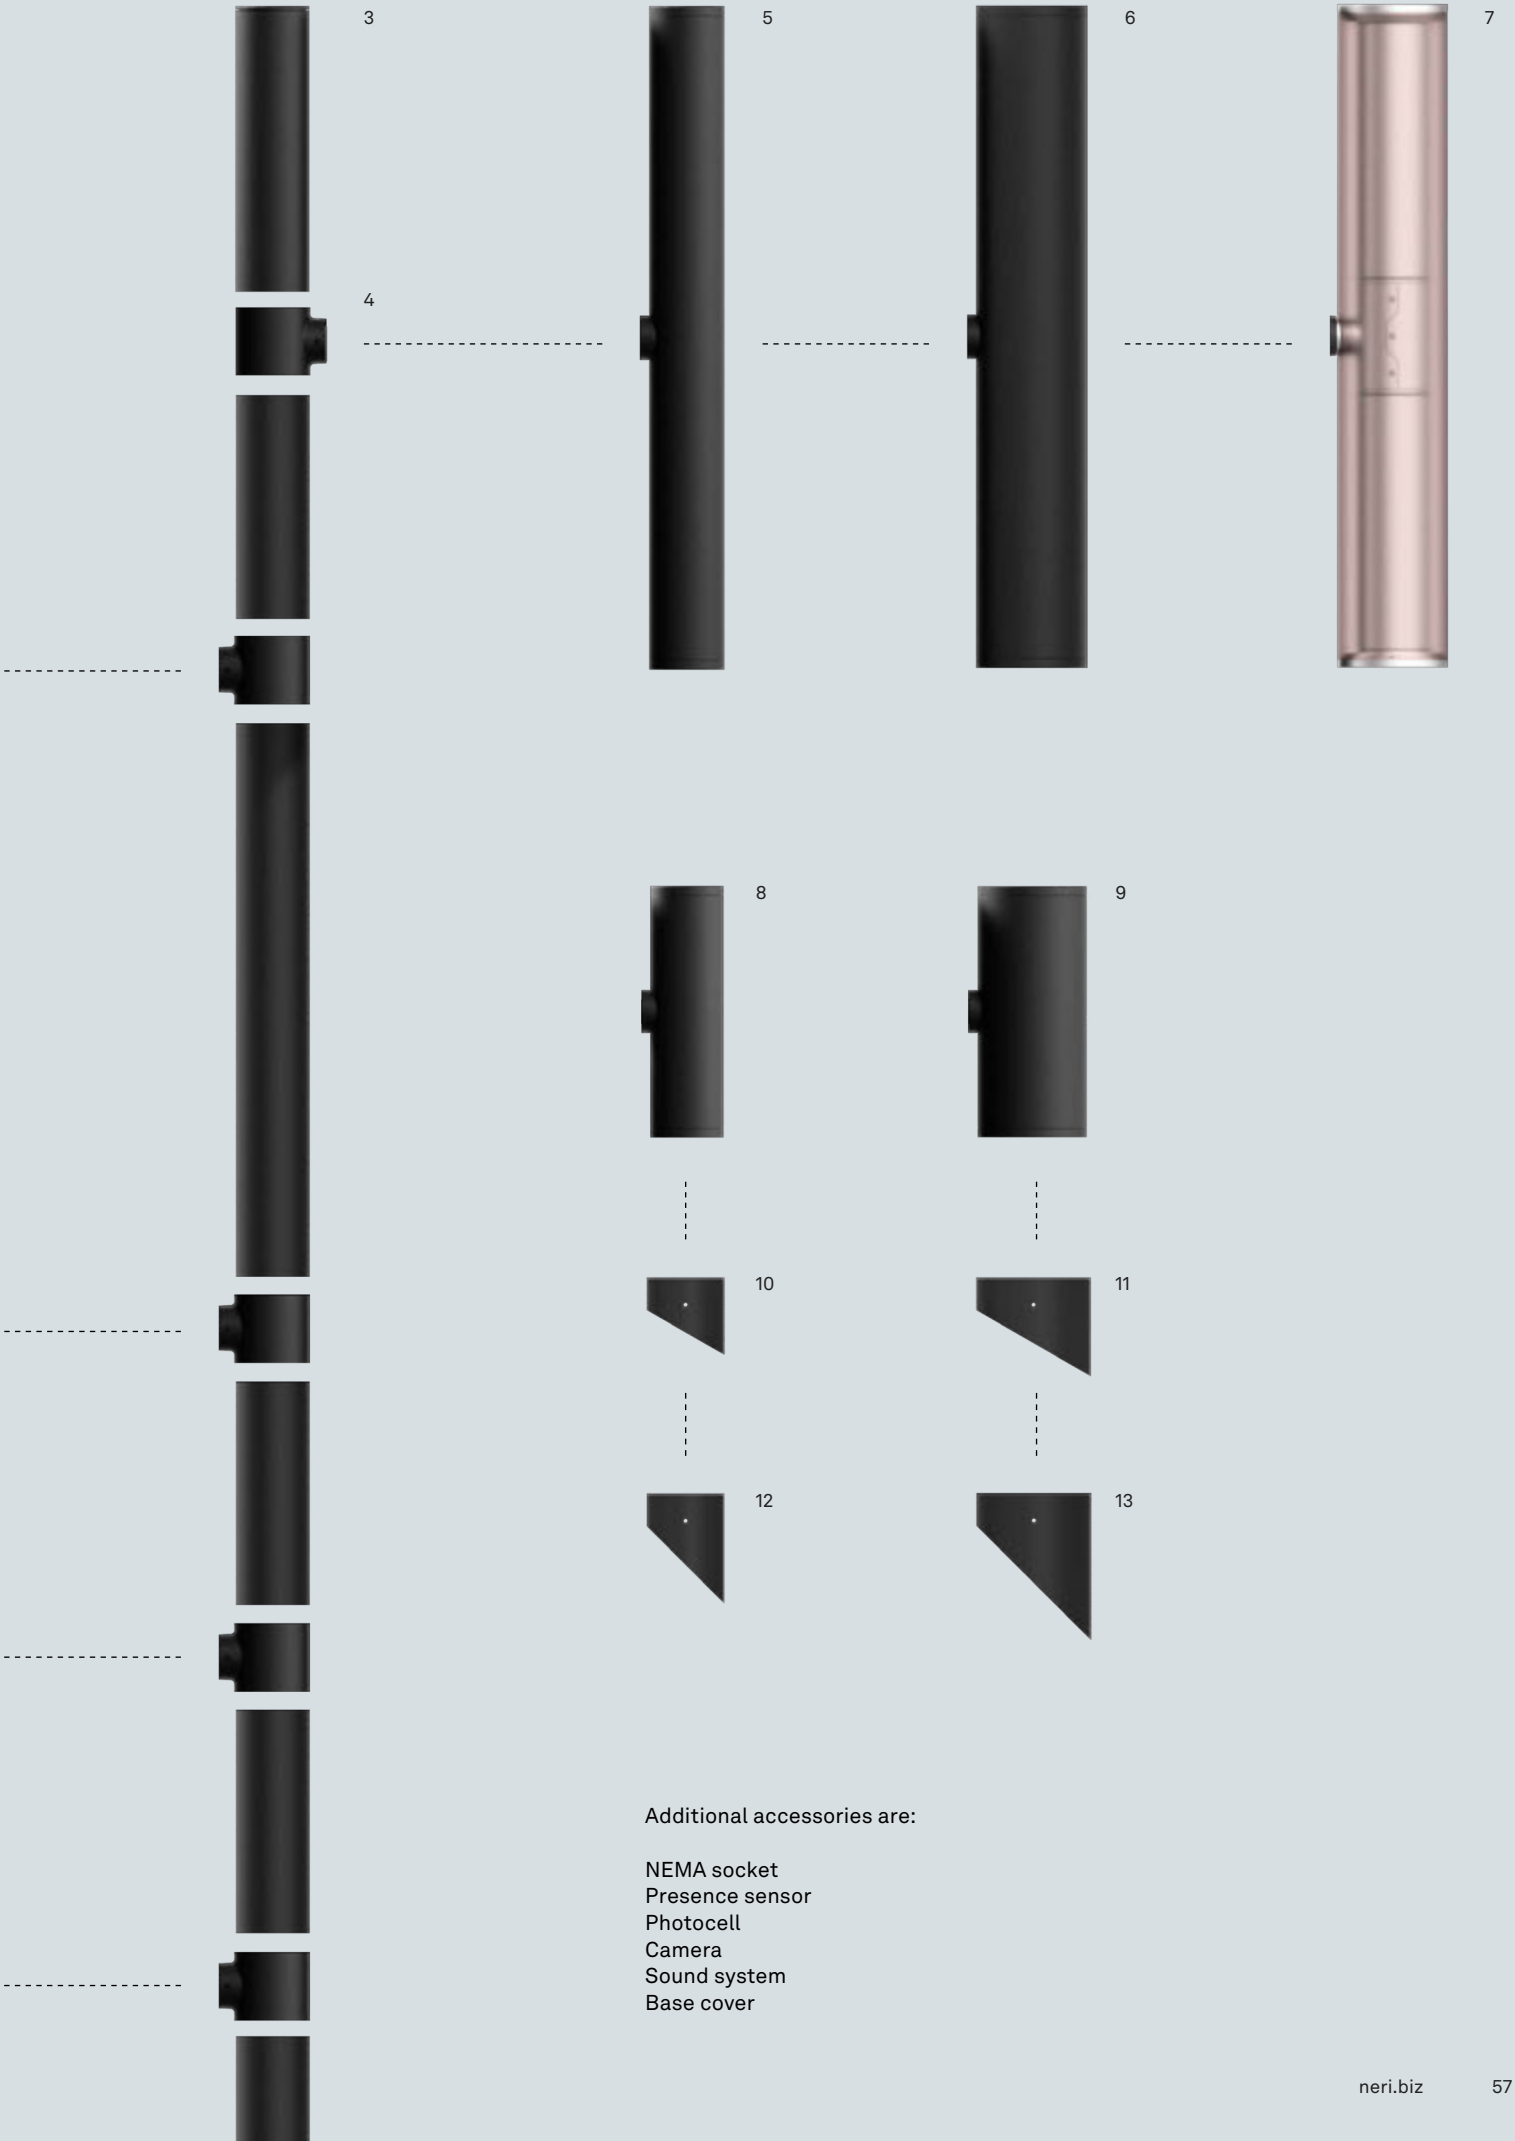

Additional accessories are:

NEMA socket
Presence sensor
Photocell
Camera
Sound system
Base cover

NEBULA S

MAIN TECHNICAL DATA

A++

OPERATING VOLTAGE
120-277V, frequency 50/60Hz

SURGE PROTECTION
10kV CM - 6kV DM

POWER SUPPLY
Electronic power supply with protection against short circuits, overheating and overvoltage

POWER FACTOR CORRECTION
PFC > cos φ 0.9

ELECTRICAL INSULATION
UL


PROTECTION RATING
Water and dust: IP66
Mechanical impact: IK08


COLOUR RENDERING INDEX
> 80

–

Neri S.p.A. reserves the right to make changes to its products and documentation without prior notice.








GLASS
TRANSPARENT FLAT GLASS
PRISMATIC GLASS

OPTICAL SYSTEM
WIDE FLOOD
VERY WIDE FLOOD
FLOOD
T2
T3 NARROW
T4
T5 SQUARE MEDIUM
T5 ROUND

COLOUR TEMPERATURE
2,700K
3,000K
4,000K
AMBER

LUMEN OUTPUT OPTIONS
550lm
1,500lm
2,500lm

DRIVER FUNCTIONS
1-10V



NEBULA L

MAIN TECHNICAL DATA

OPERATING VOLTAGE
120-277V, frequency 50/60Hz

SURGE PROTECTION
10kV CM - 6kV DM

POWER SUPPLY
Electronic power supply with protection against short circuits, overheating and overvoltage

POWER FACTOR CORRECTION
PFC > cos φ 0.9

ELECTRICAL INSULATION
UL


PROTECTION RATING
Water and dust: IP66
Mechanical impact: IK08

COLOUR RENDERING INDEX
> 80

–

Neri S.p.A. reserves the right to make changes to its products and documentation without prior notice.








GLASS
TRANSPARENT FLAT GLASS
PRISMATIC GLASS

OPTICAL SYSTEM
WIDE FLOOD
FLOOD
T2
T3 NARROW
T4
T5 SQUARE MEDIUM
T5 ROUND

COLOUR TEMPERATURE
2,700K
3,000K
4,000K
AMBER

LUMEN OUTPUT OPTIONS
1,100lm
2,500lm
3,500lm
4,500lm
6,000lm

DRIVER FUNCTIONS
1-10V



NEBULA VENEZIA

MAIN TECHNICAL DATA

A++

OPERATING VOLTAGE
120-277V, frequency 50/60Hz

SURGE PROTECTION
10kV CM - 6kV DM

POWER SUPPLY
Electronic power supply with protection against short circuits, overheating and overvoltage

POWER FACTOR CORRECTION
PFC > cos φ 0.9

ELECTRICAL INSULATION
UL

PROTECTION RATING
Water and dust: IP66
Mechanical impact: IK08

COLOUR RENDERING INDEX
> 80

–

Neri S.p.A. reserves the right to make changes to its products and documentation without prior notice.






GLASS
TRANSPARENT FLAT GLASS
PRISMATIC GLASS

OPTICAL SYSTEM
MEDIUM WIDE FLOOD
WIDE FLOOD
FLOOD
FLOOD
T1
T2
T4
T5

COLOUR TEMPERATURE
2,700K
3,000K
4,000K

LUMEN OUTPUT OPTIONS
1,000lm
1,500lm
2,500lm

DRIVER FUNCTIONS
0-10V + CLO



NEBULA COMPACT S

MAIN TECHNICAL DATA

A++

OPERATING VOLTAGE
120-277V, frequency 50/60Hz

SURGE PROTECTION
10kV CM - 6kV DM

POWER SUPPLY
Electronic power supply with protection against short circuits, overheating and overvoltage

POWER FACTOR CORRECTION
PFC > cos φ 0.9

ELECTRICAL INSULATION
UL


PROTECTION RATING
Water and dust: IP66
Mechanical impact: IK08

COLOUR RENDERING INDEX
> 80

–

Neri S.p.A. reserves the right to make changes to its products and documentation without prior notice.








GLASS
TRANSPARENT FLAT GLASS
PRISMATIC GLASS

OPTICAL SYSTEM
WIDE FLOOD
VERY WIDE FLOOD
FLOOD
T2
T3 NARROW
T4
T5 SQUARE MEDIUM
T5 ROUND

COLOUR TEMPERATURE
2,700K
3,000K
4,000K
AMBER

LUMEN OUTPUT OPTIONS
550lm
1,500lm
2,500lm

DRIVER FUNCTIONS
1-10V



NEBULA COMPACT L

MAIN TECHNICAL DATA

A++

OPERATING VOLTAGE
120-277V, frequency 50/60Hz

SURGE PROTECTION
10kV CM - 6kV DM

POWER SUPPLY
Electronic power supply with protection against short circuits, overheating and overvoltage

POWER FACTOR CORRECTION
PFC > cos φ 0.9

ELECTRICAL INSULATION
UL

PROTECTION RATING
Water and dust: IP66
Mechanical impact: IK08

COLOUR RENDERING INDEX
> 80

–

Neri S.p.A. reserves the right to make changes to its products and documentation without prior notice.








GLASS
TRANSPARENT FLAT GLASS
PRISMATIC GLASS

OPTICAL SYSTEM
WIDE FLOOD
FLOOD
T2
T3 NARROW
T4
T5 SQUARE MEDIUM
T5 ROUND

COLOUR TEMPERATURE
2,700K
3,000K
4,000K
AMBER

LUMEN OUTPUT OPTIONS
1,100lm
2,500lm
3,500lm
4,500lm
6,000lm

DRIVER FUNCTIONS
1-10V







Location: Plaza Coral Gables - Miami, USA
Photographer: © JBW Photography - Maria Bisulli


Lighting design project: CM KLING + ASSOCIATES





Pictor

PICTOR

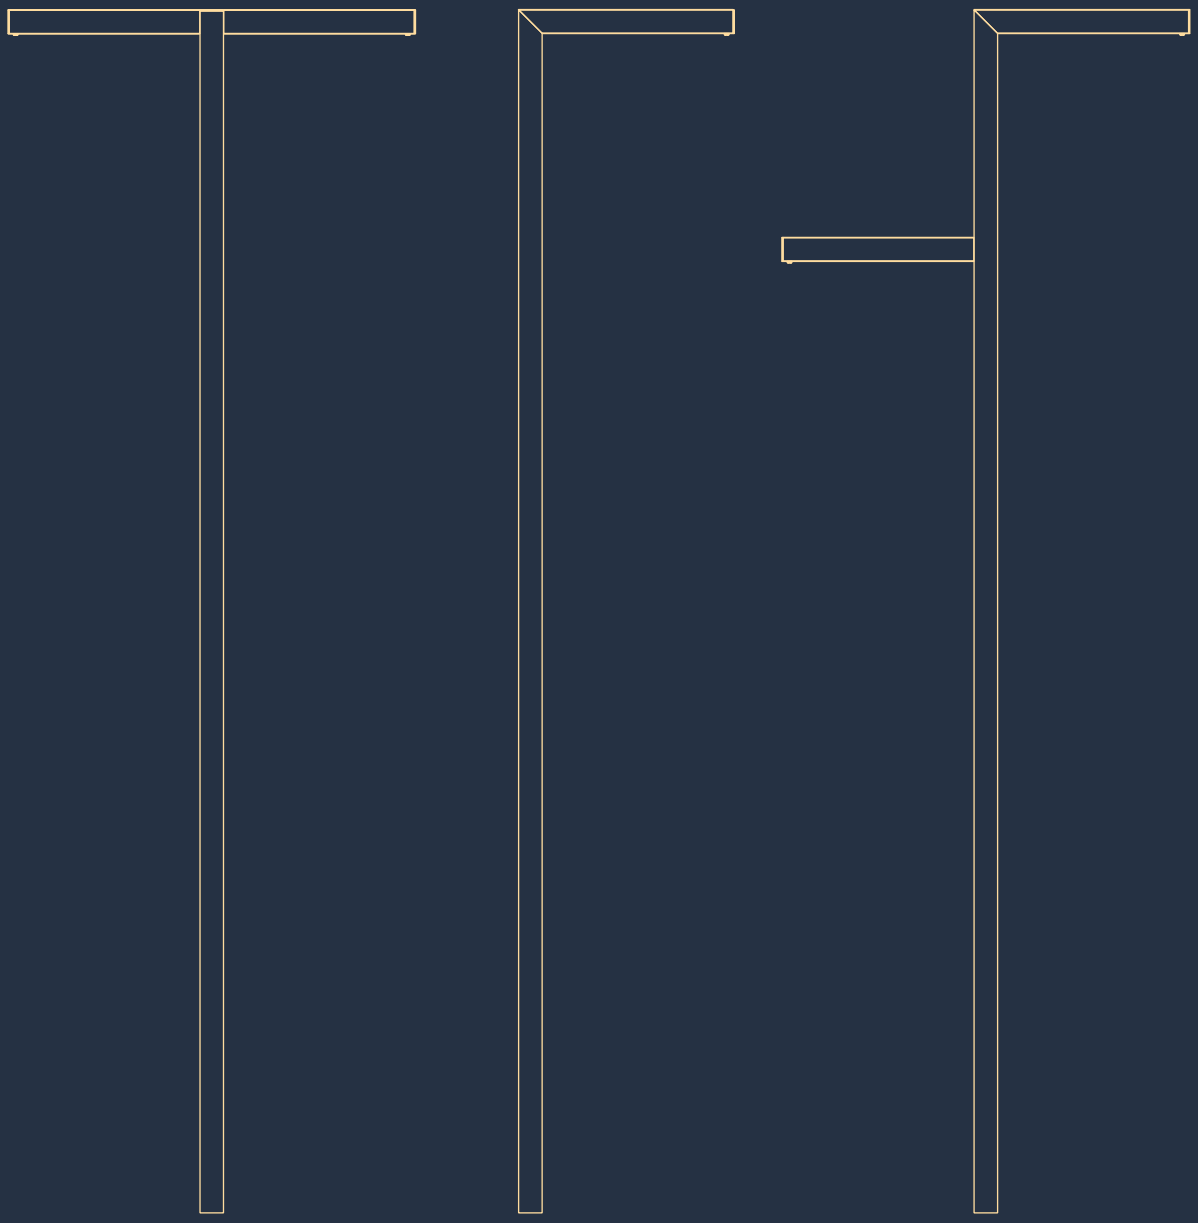

Pictor, the urban lighting system developed by Neri, offers different solutions characterised by an essential and minimalist design, perfectly suited to any context. The balance of forms and the utmost attention to construction quality combine with excellent lighting performance.

Location: Logroño, Spain
Photographer: Neri








Pictor pole-mounted system
h 13′ nom.
single and double

Pictor pole-mounted system
h 16′ 5″ nom.
single, double
and staggered double (h 13′ nom.)

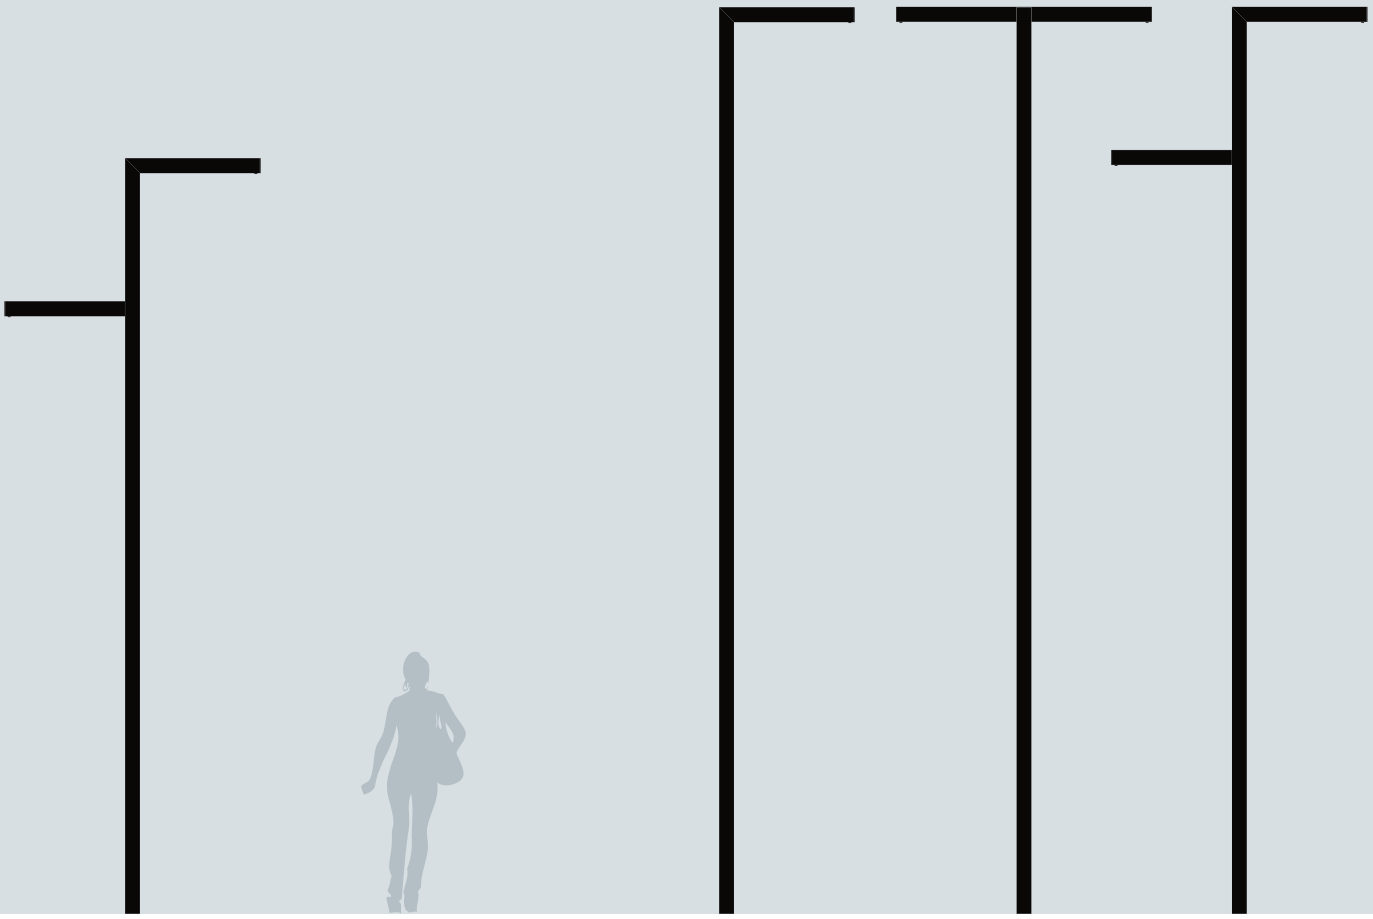

Pictor pole-mounted system
h 19′ 8″ nom.
single, double
and staggered double (16′ 5″ nom.)


The Pictor system consists of a range of poles available in different heights and configurations with one or two lighting heads, featuring LED modules configurable in terms of colour temperature, luminous flux and control protocols.

The understated aesthetic of the Pictor system, characterised by discreet elegance, is enhanced by aesthetic accessories that expand its customisation possibilities.

1. Pictor single pole system
2. Pictor double configuration
3. Pictor staggered configuration
4. Decorative cladding
5. Decorative LED module 3′

System accessories:
NEMA socket
Presence sensor

Base cover
Anchor bolt kit and quick connector kit
(available only for bollard versions)

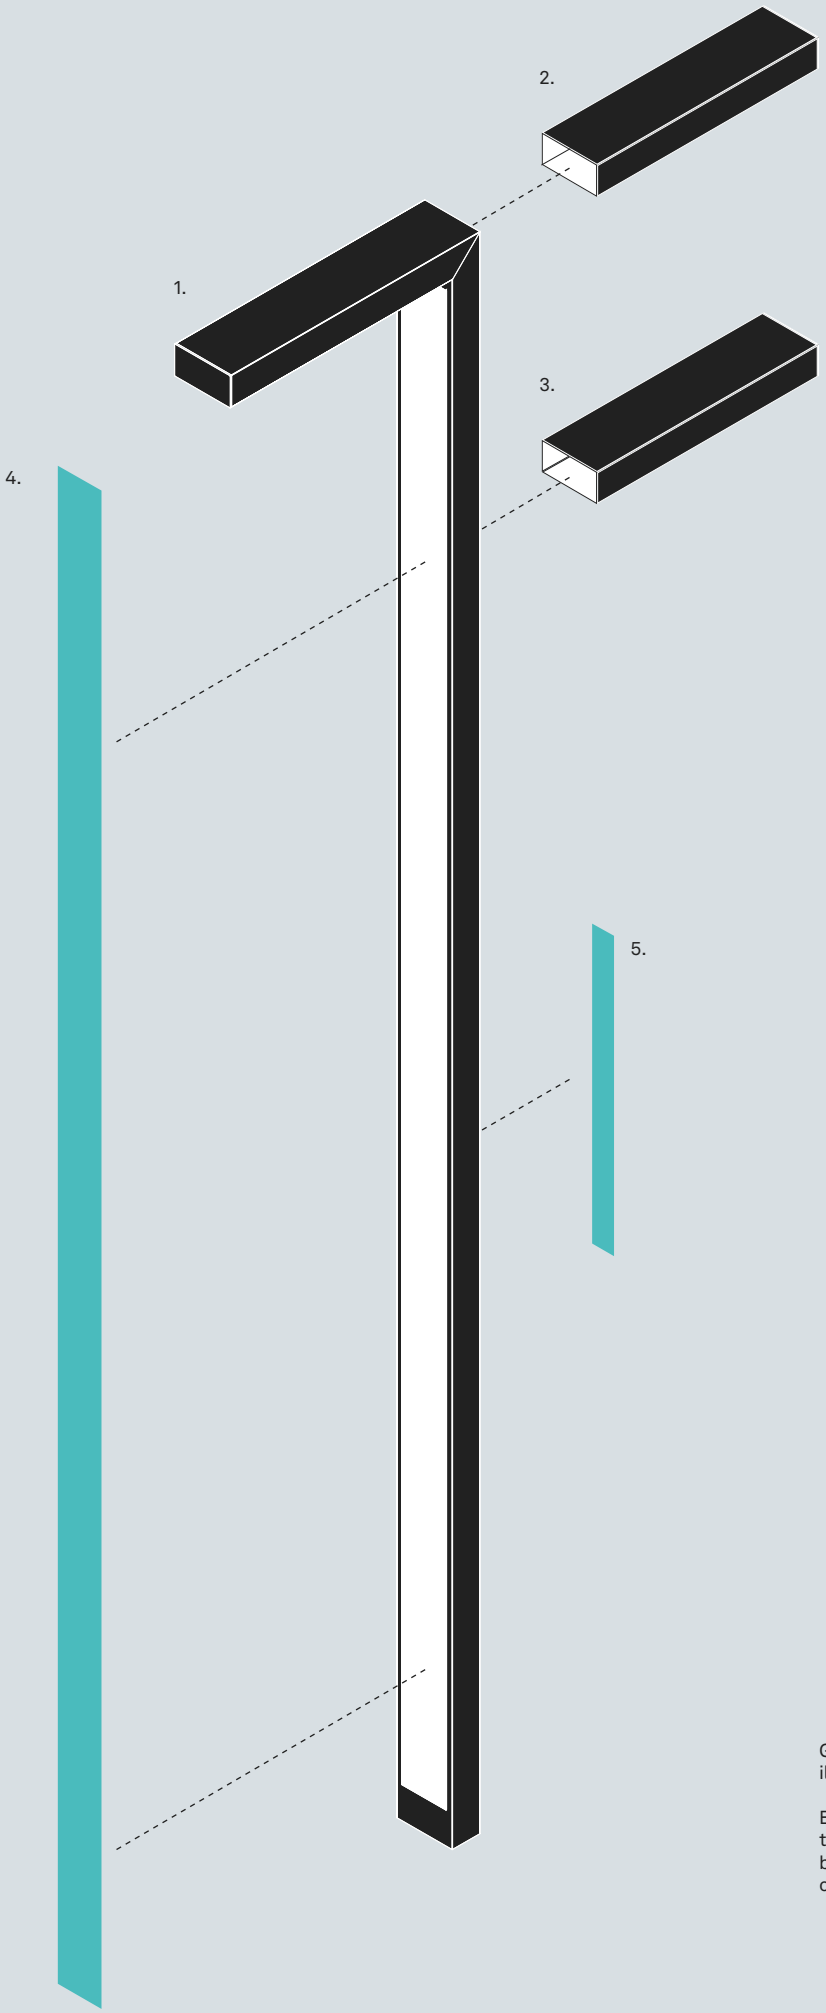


Graphic representation for illustrative purposes only.

Elements 2 and 3 are not to be considered accessories, but integral parts of the double or staggered double pole system.

SYSTEM CONFIGURATION

1. Pole height and number of light points

Three heights can be selected.
The LED modules can be arranged in single, double or staggered double configuration.

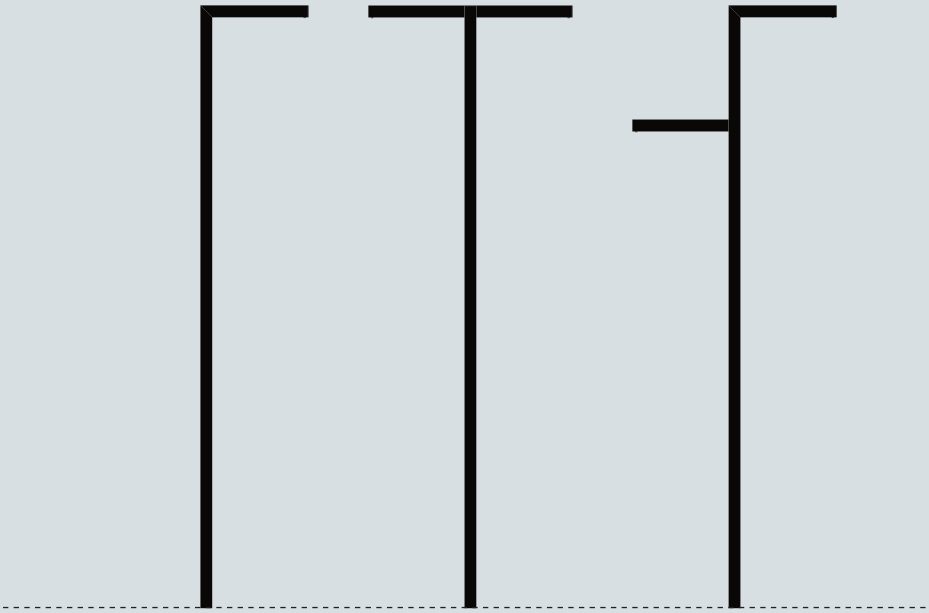



2. Configuration of lighting and control features

It is possible to choose between transparent and prismatic glass, asymmetric and rotationally symmetric distributions, standard colour temperatures of 3,000K and 4,000K, and luminous fluxes from 2,500 lm to 12,000 lm.

The control options are:

- 0-10V + CLO;
- ON-OFF + CLO.



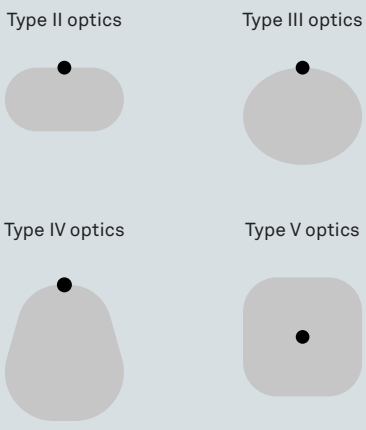

3. Pole finishes

Six standard finishes: Neri Grey, Pure White (RAL9010), Jet Black (RAL9005), Moss Green (RAL6005), Bright Aluminium (RAL9006), Grey Aluminium (RAL9007).



Neri Grey

Pure White
RAL 9010

Jet Black
RAL 9005


Moss Green
RAL 6005

Bright Aluminium
RAL 9006

Grey Aluminium
RAL 9007

4. Accessories and decorative modules

The Pictor system, in all its versions, allows the installation of a decorative LED module and a cladding available in three different finishes.

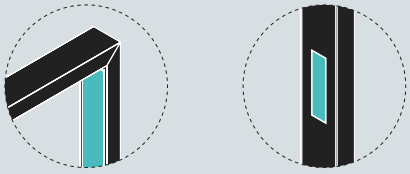


Cladding

Decorative
module


DECORATIVE LED MODULE


The luminous module is an additional element designed to enhance the character of the Pictor family, adding a decorative touch to an extremely technical product.

Ambient lighting, signalling, but also an element designed for customisation.

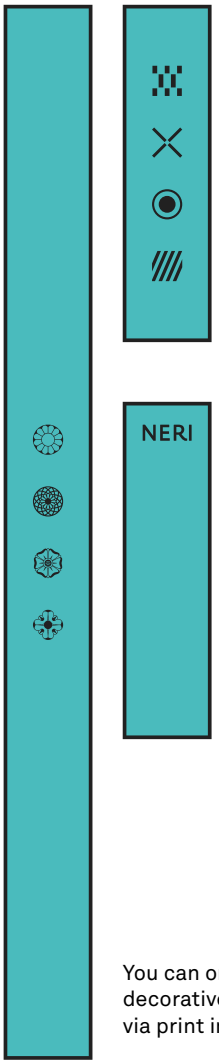

You can order Pictor with or without the decorative module, which can be customized via print in both 1′ nom. and 39″ nom. versions.

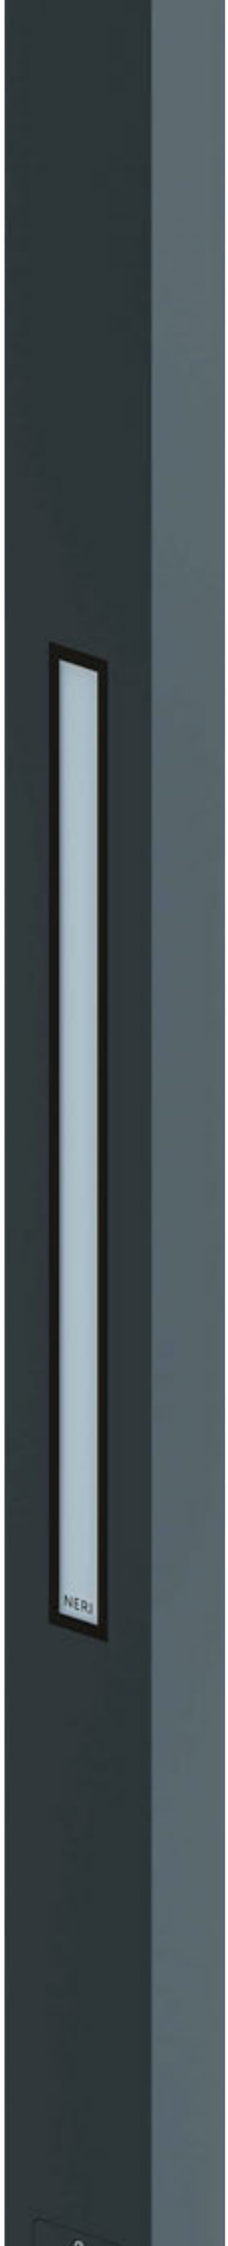

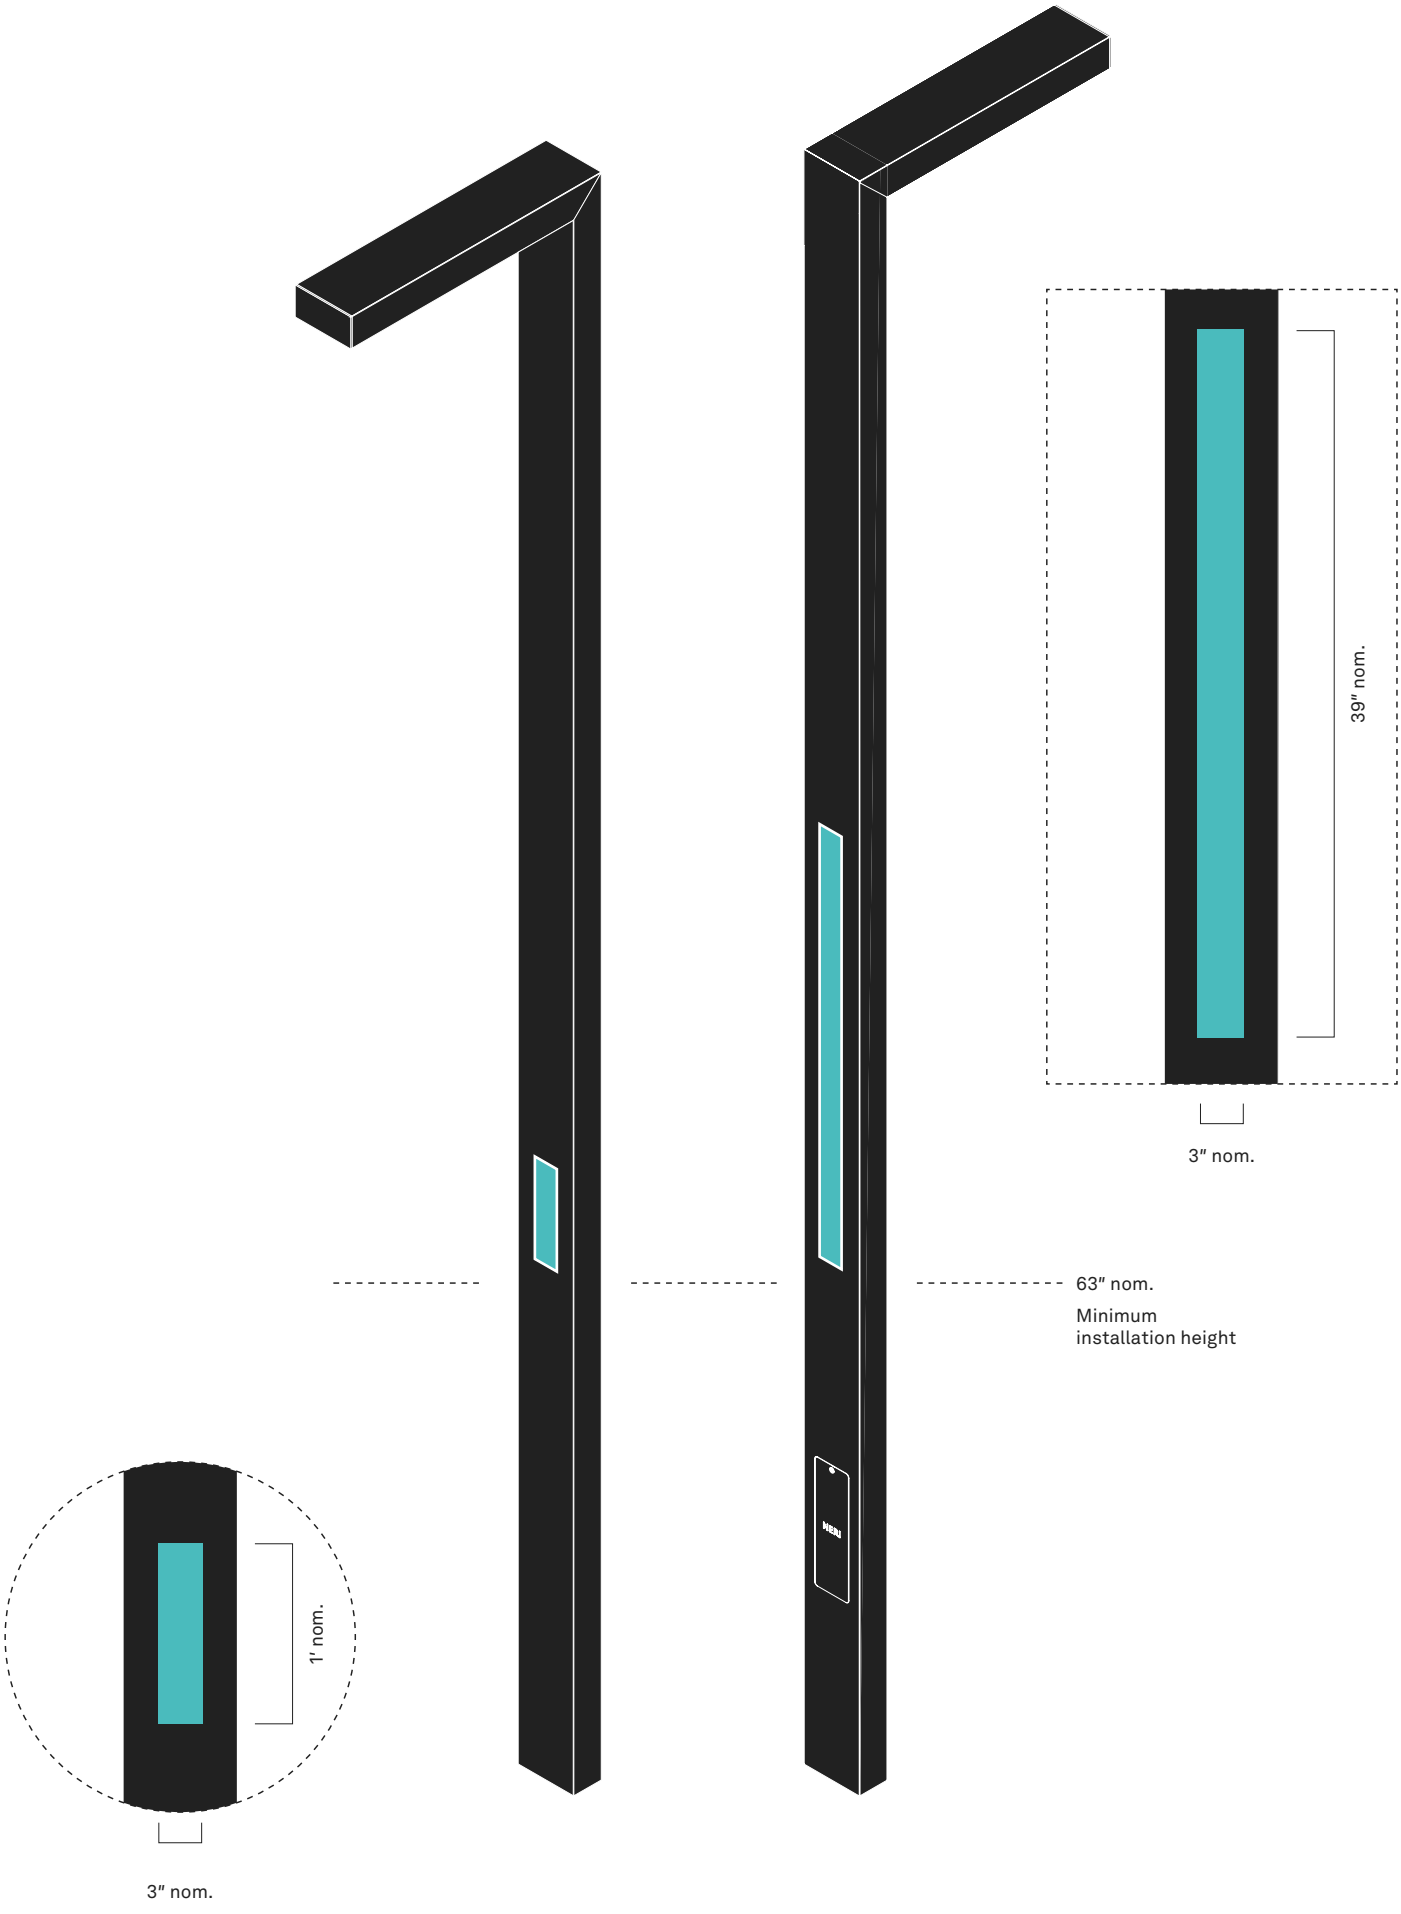
39″ nom.
3″ nom.
63″ nom.
Minimum
installation height
1′ nom.
3″ nom.

FINISHES AND CLADDING

The cladding allows the combination of different materials and finishes, making the product a distinctive element of the urban space where it will be installed.

Pole finishes

Neri Grey

Jet Black
RAL 9005

Bright Aluminium
RAL 9006

Pure White
RAL 9010

Moss Green
RAL 6005

Grey Aluminium
RAL 9007

Cladding finishes

Neri Grey


Bright Aluminium
RAL 9006


Bronze


Wood



Neri Grey

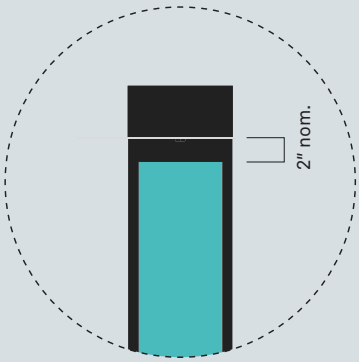


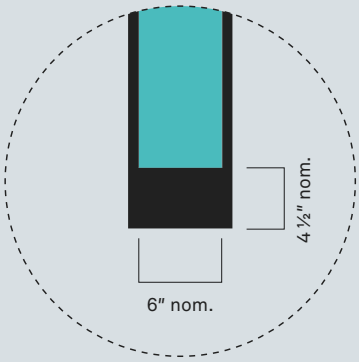

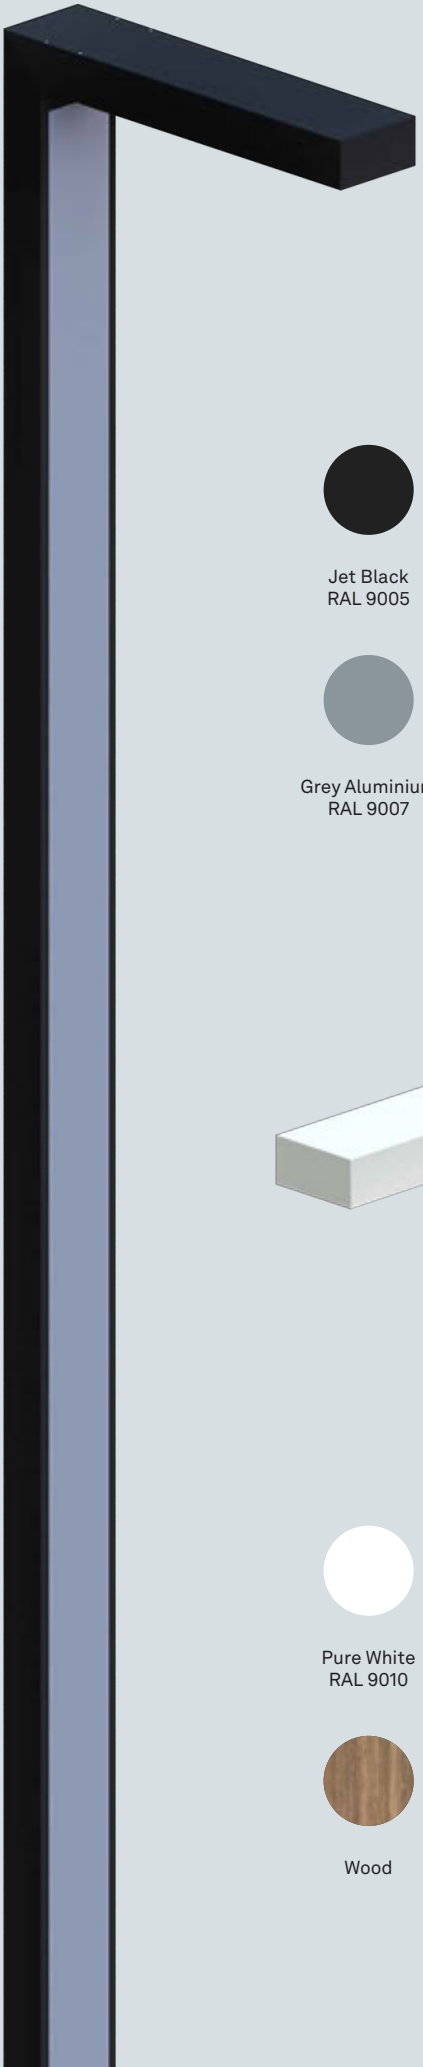


Jet Black
RAL 9005

Grey Aluminium
RAL 9007

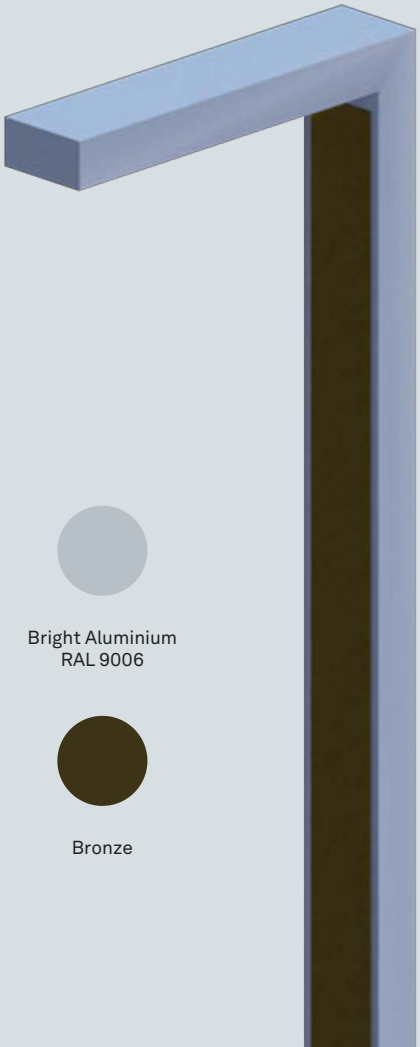


Bright Aluminium
RAL 9006

Bronze

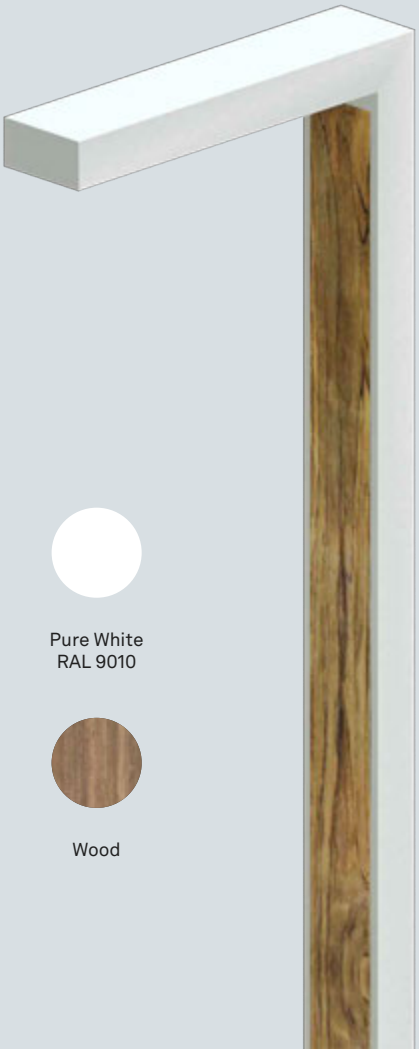

Pure White
RAL 9010

Wood

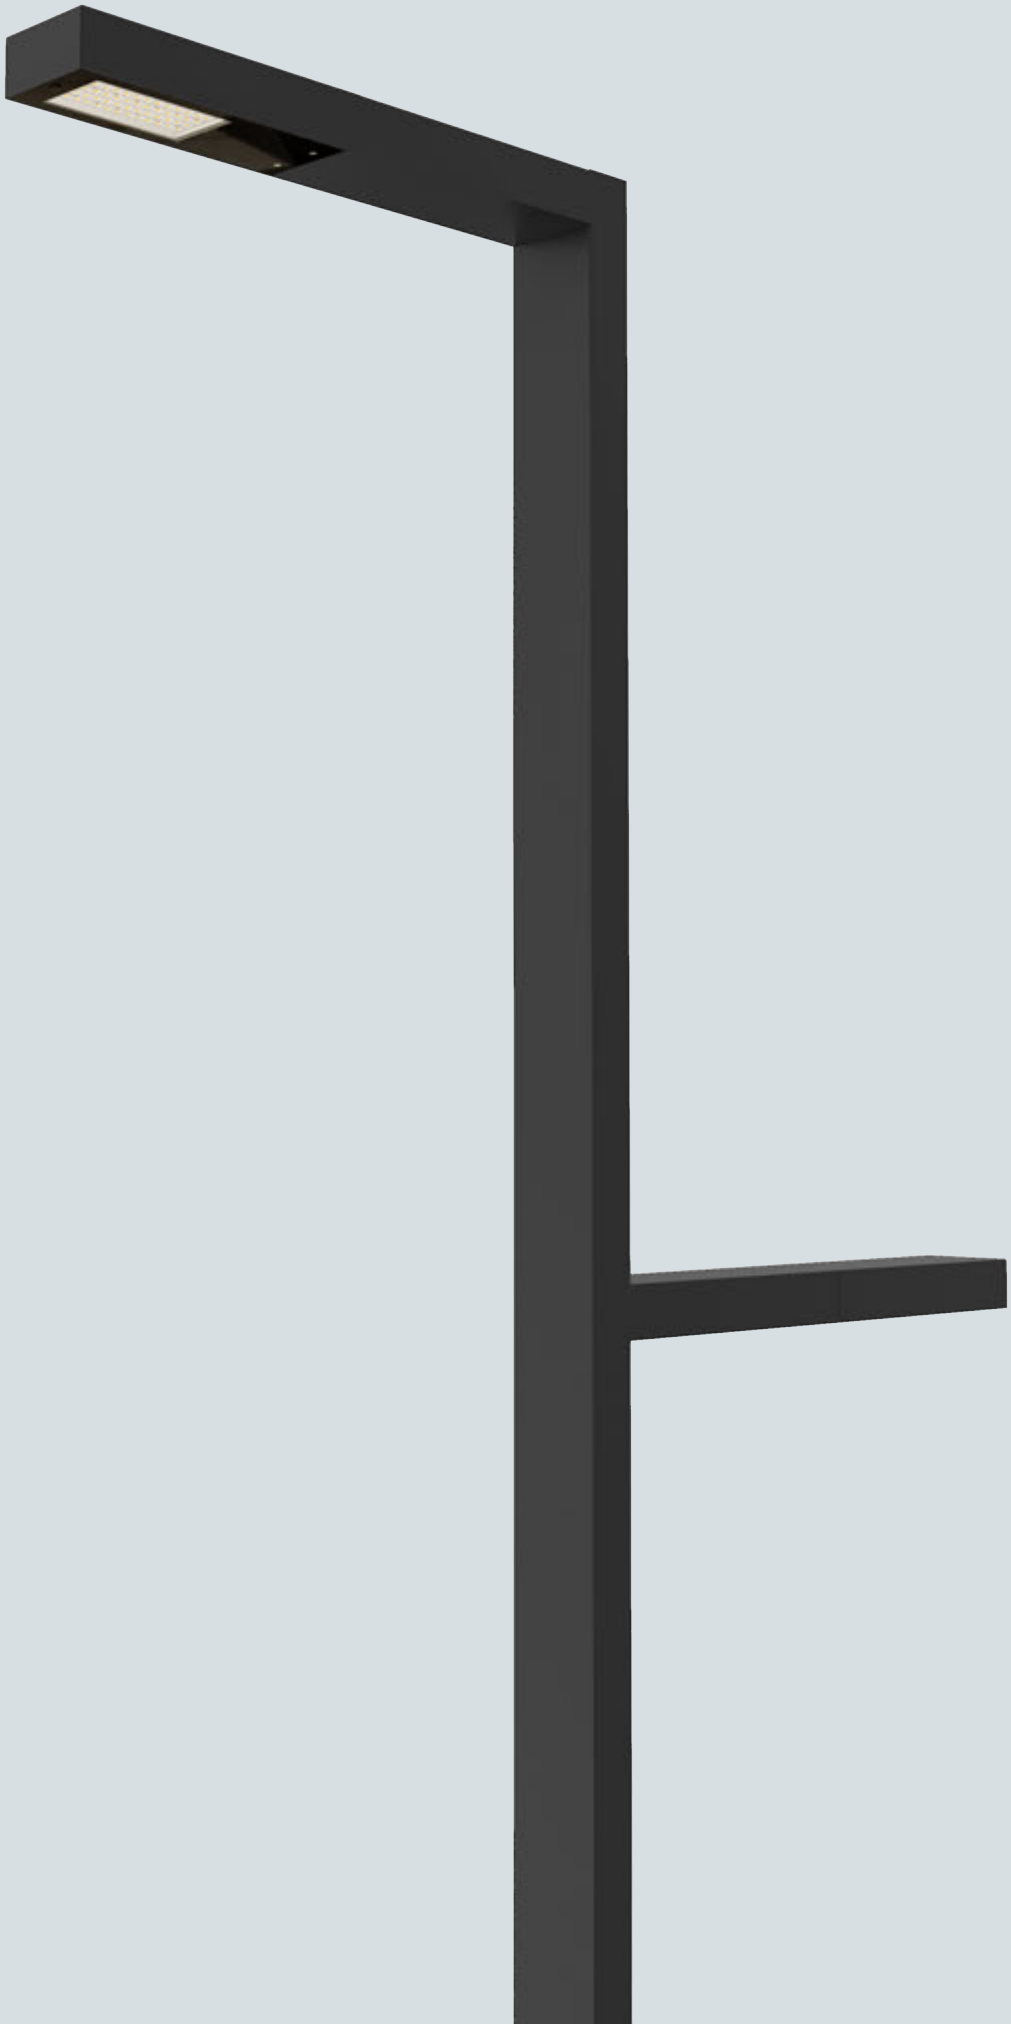

NERI SMART DESIGN


All Neri products can, upon request,
be equipped with Smart solutions.
Please contact the company for further information.




Motion sensor
A single light point or multiple grouped units can modulate the luminous flux according to the detection of movement of people or objects.




Adaptive lighting
Intelligent sensors allow the modulation of light output according to different weather conditions.



Light management
Products are connected through an intelligent communication network. Centralised remote or local control is possible via an app for individual light points or grouped light points.




Public information systems
The light point can become a distribution element through components such as integrated displays installed on poles to provide public notices and information.



Safety modules
Products can be integrated with security cameras, audio speakers and emergency call buttons to increase safety in public spaces.



Public WiFi hotspot
Products can be equipped with WiFi modules to create public hotspots.
Professional or private-use information can be shared through the network of connected nodes created.



Environmental data recording
Intelligent sensors to monitor in real time the parameters related to weather and environmental conditions.

PICTOR POLE SYSTEM

MAIN TECHNICAL DATA

A++

In compliance with UL Standard 1598, UL8750.

OPERATING VOLTAGE
120V-277V, frequency 50/60Hz

SURGE PROTECTION
Up to 10kV/10kV

POWER SUPPLY
Electronic power supply with protection against short circuits, overheating and overvoltage

POWER FACTOR CORRECTION
PFC > cos φ 0.9


ELECTRICAL INSULATION
Class II


PROTECTION RATING
Water and dust: IP66
Mechanical impact: IK09


COLOUR RENDERING INDEX
> 80

–

Neri S.p.A. reserves the right to make changes to its products and documentation without prior notice.








GLASS
PRISMATIC GLASS

OPTICAL SYSTEM	
TYPE II - D	ASYMMETRIC STREET LIGHTING
TYPE III - B	ASYMMETRIC STREET LIGHTING
TYPE III - C	ASYMMETRIC STREET LIGHTING
TYPE III - H	ASYMMETRIC STREET LIGHTING
TYPE IV - A	ASYMMETRIC FORWARD THROW
TYPE IV - C	ASYMMETRIC FORWARD THROW
TYPE V - A	ROTATIONALLY SYMMETRIC

COLOUR TEMPERATURE
3,000K
4,000K

LUMEN OUTPUT OPTIONS
2,500lm
3,500lm
4,500lm
6,000lm
7,500lm
9,000lm
10,500lm
12,000lm

DRIVER FUNCTIONS
0-10V + CLO
ON-OFF + CLO







Location: Riccione, Italy
Photographer: Antonio Neri





Lighting

fixtures



Antares S	90	UPDATE Quick Ship Program
Pole Adapter | Antares S	92	UPDATE Quick Ship Program
Antares L	94	UPDATE Quick Ship Program
Pole Adapter | Antares L	96	UPDATE Quick Ship Program


Antares

ANTARES

Design: Makio Hasuike

UPDATE


Quick Ship Program

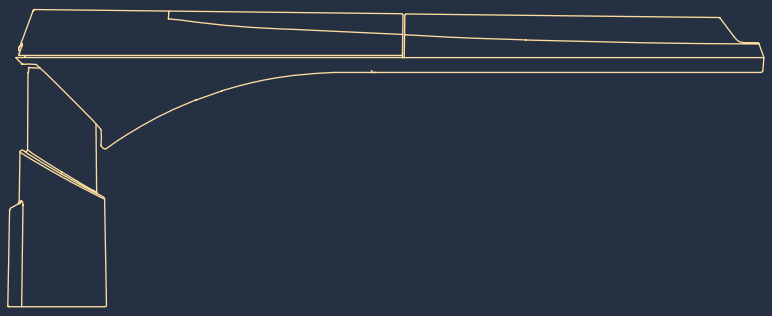

Antares combines design, visual comfort, performance, and energy efficiency in a single street lighting fixture. Equipped with optical technology that delivers extremely high performance, its adjustable tilt joint ensures maximum flexibility of use.

ANTARES | LUMINAIRE | ANTARES S



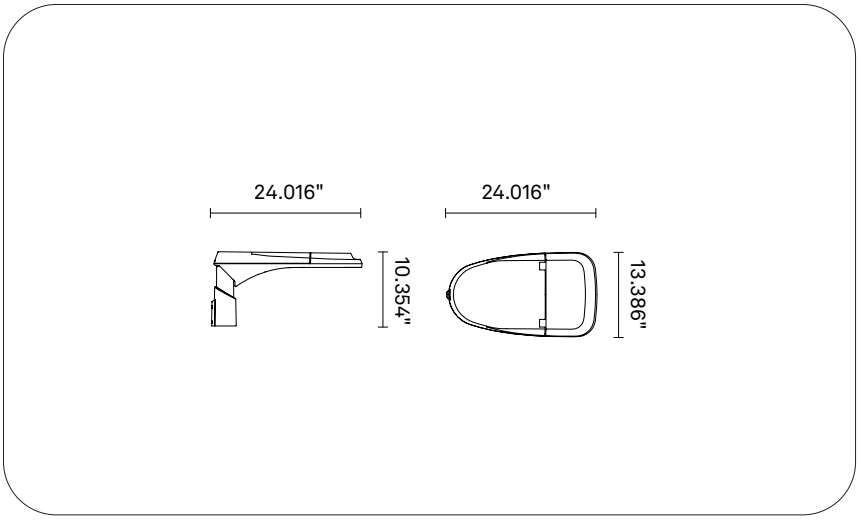

ORDERING INFORMATION / GUIDE

Example: **LUANT00-U-D28-727-L025-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**727** Ra70 2700 K	**L016** 1600 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D46 AFR/SPORT N	**730** Ra70 3000 K	**L025** 2500 lm		**V3** 347V-480V	**F43** 1-10V+PIR		
D36 T2 medium	**740** Ra70 4000 K	**L035** 3500 lm			**F11** NEMA-3		
D56 T2 medium + BLC	**XAM** Amber	**L045** 4500 lm			**F12** NEMA-7		
D47 AFR/SPORT W		**L060** 6000 lm					
D55 AFR/SPORT W + BLC		**L075** 7500 lm					
D48 T2 wide		**L090** 9000 lm					
D22 T3 narrow		**L105** 10500 lm					
D57 T3 narrow + BLC							
D25 T2 narrow							
D37 T3 medium							
D59 T3 medium + BLC							
D24 T4 wide							
D58 T4 wide + BLC							
D38 T4 medium							
D60 T4 medium + BLC							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Dubai, UAE
Photographer: Antonio Neri
Lighting design project: HLB Lighting Design

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D
LED forward current: 304-924 mA
Power rating: 13.1-63.2 W
Nominal Flux: 1600-10500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 65-100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 155° γ = 13, 68°
Luminous flux: 1044-10500 lm
Luminous efficacy: 22-157 lm/W
BUG: B=0-3, U=0, G=0-3


ELECTRICAL CHARACTERISTICS
Luminaire power: 15.9-72.4 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an openable upper frame for access to the auxiliary compartment and an integrated heat sink.
Shield in extra-clear tempered glass with IK08 impact resistance (EN 62262).
Internal white reflector in polycarbonate, silicone seal between lower frame and upper cover, stainless steel screws, and osmotic valve for pressure balancing.
Compartment dedicated to surge protectors or remote monitoring systems.

Length: 24.016 in
Width: 13.386 in
Height: 10.354 in
Weight: 23.15 lb
EPA: 0.32 ft²


INSTALLATION
Suitable for side mounting or pole-top installation on Ø 1-7/8″ tubes and Ø 2-3/8″ tubes.
Adjustable from 0°/+20° in pole-top configuration, from -5°/+15° in bracket configuration.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

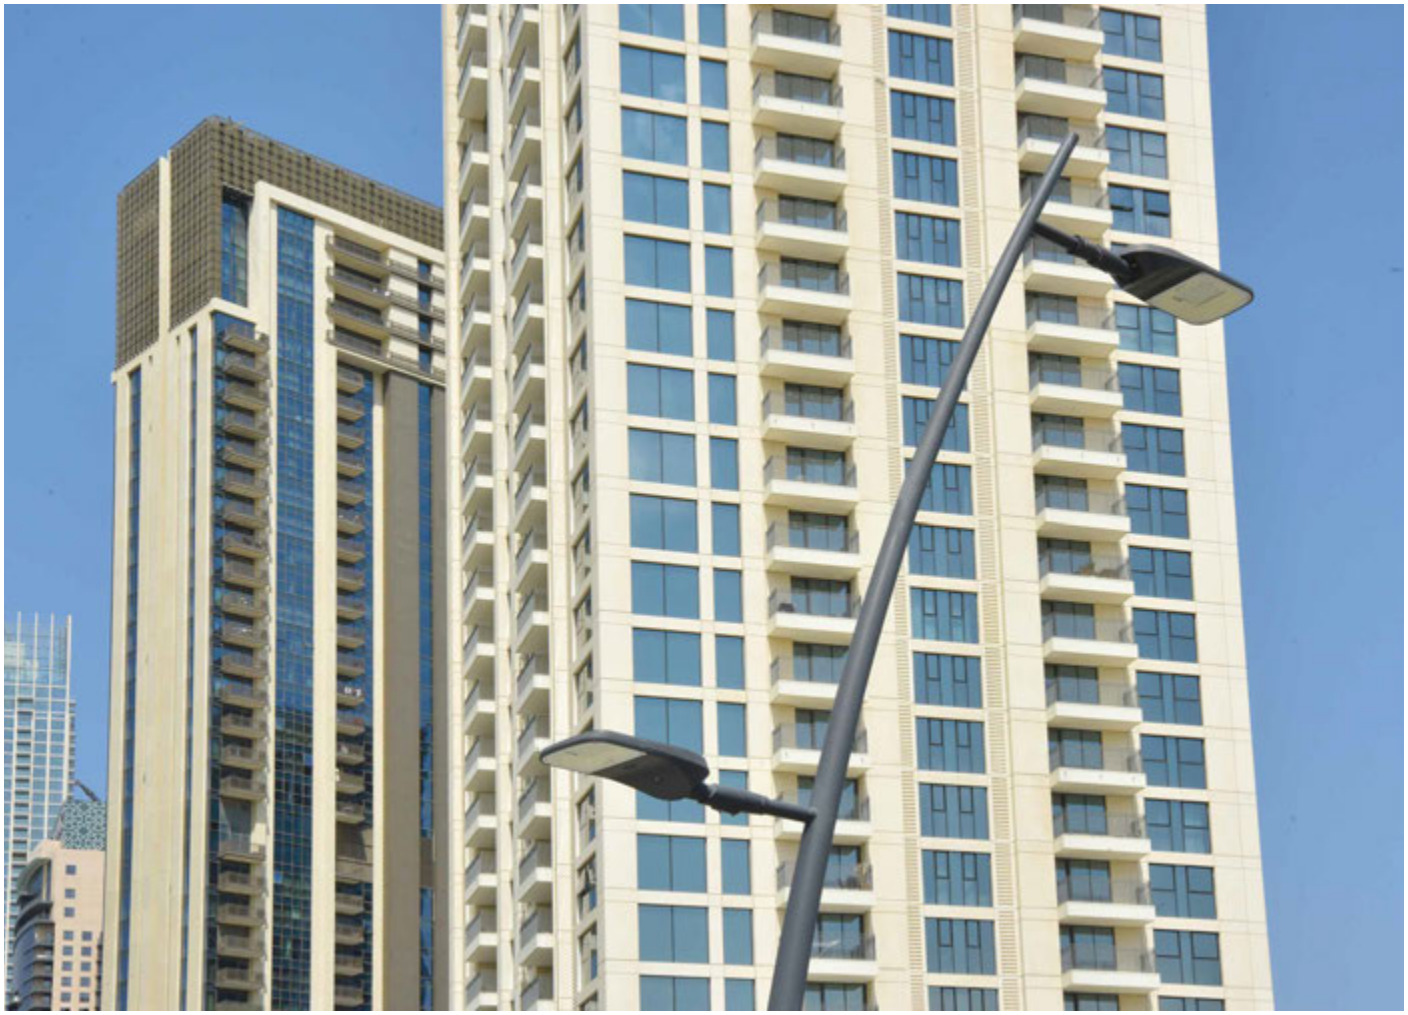

ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES S



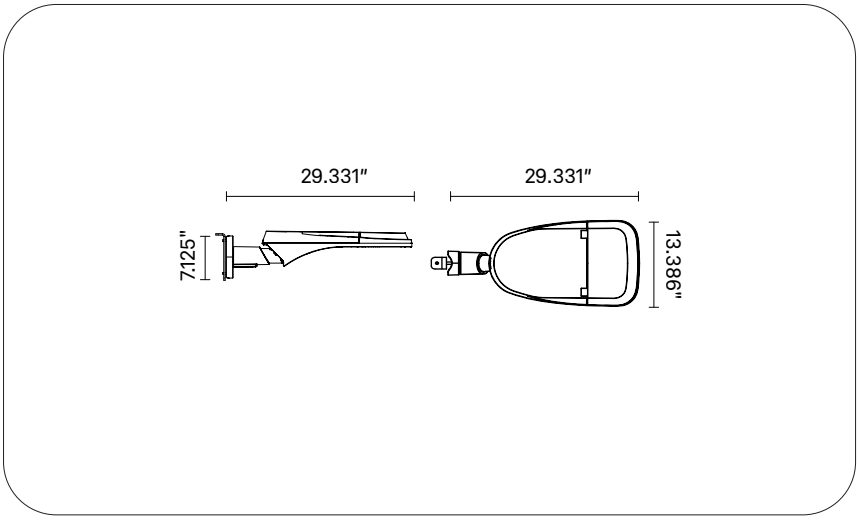

ORDERING INFORMATION / GUIDE

Example: **LUANTA0-U-D28-727-L025-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**727** Ra70 2700 K	**L016** 1600 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D46 AFR/SPORT N	**730** Ra70 3000 K	**L025** 2500 lm		**V3** 347V-480V	**F43** 1-10V+PIR		
D36 T2 medium	**740** Ra70 4000 K	**L035** 3500 lm			**F11** NEMA-3		
D56 T2 medium + BLC	**XAM** Amber	**L045** 4500 lm			**F12** NEMA-7		
D47 AFR/SPORT W		**L060** 6000 lm					
D55 AFR/SPORT W + BLC		**L075** 7500 lm					
D48 T2 wide		**L090** 9000 lm					
D22 T3 narrow		**L105** 10500 lm					
D57 T3 narrow + BLC							
D25 T2 narrow							
D37 T3 medium							
D59 T3 medium + BLC							
D24 T4 wide							
D58 T4 wide + BLC							
D38 T4 medium							
D60 T4 medium + BLC							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

CONFIGURE ONLINE
AND DISCOVER MORE

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D
LED forward current: 304-924 mA
Power rating: 13.1-63.2 W
Nominal Flux: 1600-10500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 65-100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 155° γ = 13, 68°
Luminous flux: 1044-10500 lm
Luminous efficacy: 22-157 lm/W
BUG: B=0-3, U=0, G=0-3

ELECTRICAL CHARACTERISTICS
Luminaire power: 15.9-72.4 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an openable upper frame for access to the auxiliary compartment and an integrated heat sink.
Shield in extra-clear tempered glass with IK08 impact resistance (EN 62262).
Internal white reflector in polycarbonate, silicone seal between lower frame and upper cover, stainless steel screws, and osmotic valve for pressure balancing.
Compartment dedicated to surge protectors or remote monitoring systems.

Length: 29.331 in
Width: 13.386 in
Height: 7.126 in
Weight: 23.15 lb
EPA: 0.32 ft²


INSTALLATION
Suitable for side mounting or pole-top installation on Ø 1-7/8″ tubes and Ø 2-3/8″ tubes.
Adjustable from 0°/+20° in pole-top configuration, from -5°/+15° in bracket configuration.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



ANTARES | LUMINAIRE | ANTARES L



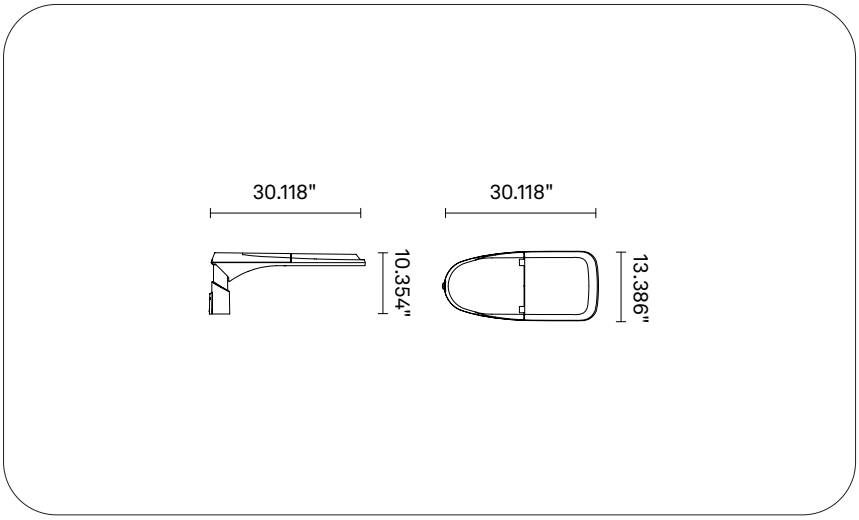

ORDERING INFORMATION / GUIDE

Example: **LUANT01-U-D28-727-L075-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**727** Ra70 2700 K	**L040** 4000 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D46 AFR/SPORT N	**730** Ra70 3000 K	**L075** 7500 lm		**V3** 347V-480V	**F43** 1-10V+PIR		
D36 T2 medium	**740** Ra70 4000 K	**L090** 9000 lm			**F11** NEMA-3		
D56 T2 medium + BLC	**XAM** Amber	**L105** 10500 lm			**F12** NEMA-7		
D47 AFR/SPORT W		**L120** 12000 lm					
D55 AFR/SPORT W + BLC		**L135** 13500 lm					
D48 T2 wide		**L150** 15000 lm					
D22 T3 narrow		**L180** 18000 lm					
D57 T3 narrow + BLC		**L210** 21000 lm					
D25 T2 narrow		**L240** 24000 lm					
D37 T3 medium							
D59 T3 medium + BLC							
D24 T4 wide							
D58 T4 wide + BLC							
D38 T4 medium							
D60 T4 medium + BLC							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Dubai, UAE
Photographer: Antonio Neri
Lighting design project: HLB Lighting Design

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D
LED forward current: 368-906 mA
Power rating: 39.8-154.4 W
Nominal Flux: 4000-24000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 65-100% ULOR = 0%
LED quantity: 40, 60
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 155° γ = 13, 68°
Luminous flux: 2611-24000 lm
Luminous efficacy: 22-162 lm/W
BUG: B=1-4, U=0, G=0-3

ELECTRICAL CHARACTERISTICS
Luminaire power: 47.1-171.4 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an openable upper frame for access to the auxiliary compartment and an integrated heat sink.
Shield in extra-clear tempered glass with IK08 impact resistance (EN 62262).
Internal white reflector in polycarbonate, silicone seal between lower frame and upper cover, stainless steel screws, and osmotic valve for pressure balancing.
Provision for additional surge protectors or remote monitoring systems.

Length: 30.118 in
Width: 13.386 in
Height: 10.354 in
Weight: 28.66 lb
EPA: 0.32 ft²


INSTALLATION
Suitable for side mounting or pole-top installation on Ø 1-7/8" tubes and Ø 2-3/8" tubes.
Adjustable from 0°/+20° in pole-top configuration, from -5°/+15° in bracket configuration.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



ANTARES | LUMINAIRE | POLE ADAPTER | ANTARES L



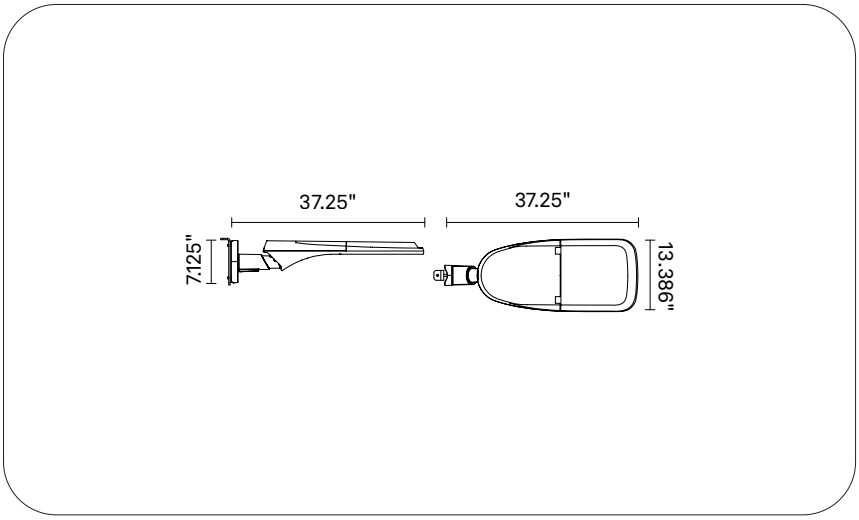

ORDERING INFORMATION / GUIDE

Example: **LUANTA1-U-D28-727-L075-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**727** Ra70 2700 K	**L040** 4000 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D46 AFR/SPORT N	**730** Ra70 3000 K	**L075** 7500 lm		**V3** 347V-480V	**F43** 1-10V+PIR		
D36 T2 medium	**740** Ra70 4000 K	**L090** 9000 lm			**F11** NEMA-3		
D56 T2 medium + BLC	**XAM** Amber	**L105** 10500 lm			**F12** NEMA-7		
D47 AFR/SPORT W		**L120** 12000 lm					
D55 AFR/SPORT W + BLC		**L135** 13500 lm					
D48 T2 wide		**L150** 15000 lm					
D22 T3 narrow		**L180** 18000 lm					
D57 T3 narrow + BLC		**L210** 21000 lm					
D25 T2 narrow		**L240** 24000 lm					
D37 T3 medium							
D59 T3 medium + BLC							
D24 T4 wide							
D58 T4 wide + BLC							
D38 T4 medium							
D60 T4 medium + BLC							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

CONFIGURE ONLINE
AND DISCOVER MORE

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D
LED forward current: 368-906 mA
Power rating: 39.8-154.4 W
Nominal Flux: 4000-24000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 65-100% ULOR = 0%
LED quantity: 40, 60
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 155° γ = 13, 68°
Luminous flux: 2611-24000 lm
Luminous efficacy: 22-162 lm/W
BUG: B=1-4, U=0, G=0-3

ELECTRICAL CHARACTERISTICS
Luminaire power: 47.1-171.4 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an openable upper frame for access to the auxiliary compartment and an integrated heat sink.
Shield in extra-clear tempered glass with IK08 impact resistance (EN 62262).
Internal white reflector in polycarbonate, silicone seal between lower frame and upper cover, stainless steel screws, and osmotic valve for pressure balancing.
Provision for additional surge protectors or remote monitoring systems.

Length: 37.244 in
Width: 13.386 in
Height: 7.126 in
Weight: 28.66 lb
EPA: 0.32 ft²

INSTALLATION
Suitable for side mounting or pole-top installation on Ø 1-7/8″ tubes and Ø 2-3/8″ tubes.
Adjustable from 0°/+20° in pole-top configuration, from -5°/+15° in bracket configuration.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Chara

CHARA


Design: Studio ATA

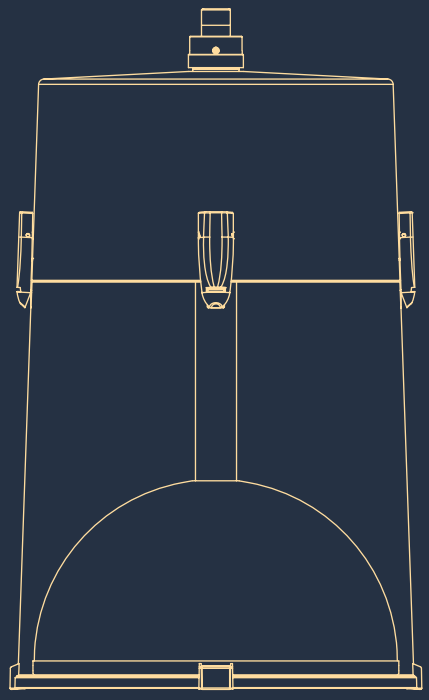

With a unique aesthetic inspired by interior lighting design, Chara integrates seamlessly into both historical and contemporary settings.

CHARA | LUMINAIRE



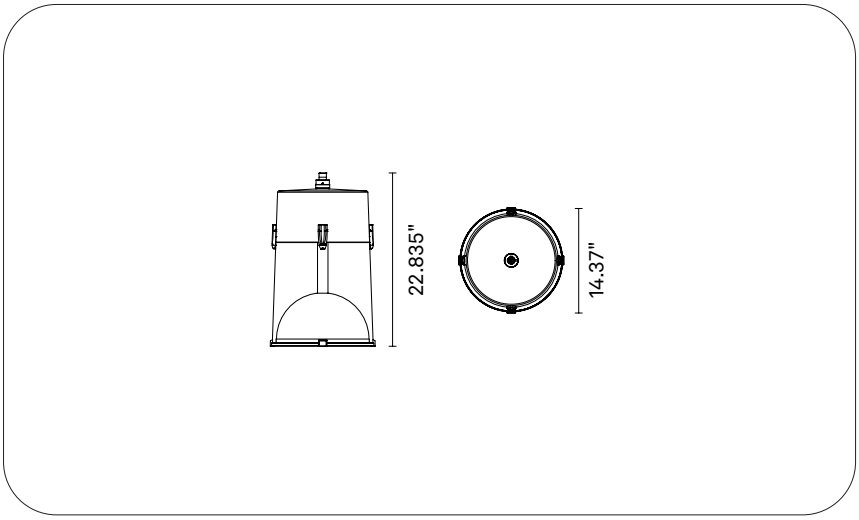

ORDERING INFORMATION / GUIDE

Example: **LUCHA00-U-D28-840-L025-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**827** Ra80 2700 K	**L025** 2500 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**830** Ra80 3000 K	**L035** 3500 lm			**F11** NEMA-3		
D22 T3 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D25 T2 narrow		**L060** 6000 lm					
D37 T3 medium		**L075** 7500 lm					
D24 T4 wide							
D38 T4 medium							
D30 T5 square medium							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 356-748 mA
Power rating: 15.4-48.5 W
Nominal Flux: 2500-7500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32
Cutoff Angle: Semi Cutoff C = 0, 60° γ = 42, 52°
Luminous flux: 2500-7500 lm
Luminous efficacy: 115-134 lm/W
BUG: B=1-2, U=0, G=1-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 18.6-56.7 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -13 °F / +122 °F

Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Die-cast aluminum housing (UNI EN 1706) with cylindrical top frame equipped with a quick-connect brass fitting and G3/4" threaded tube for mounting to the support, complete with internal cable gland.
Cylindrical shield in polycarbonate with prismatic glass base and silicone sealing gasket.
Tilting inner frame in anodized aluminium sheet, openable via snap-in clips for access to the auxiliary compartment, with wiring plate, reflective semi-sphere, and connection tube.
Stainless steel screws.

Diameter: 14.37 in
Height: 22.835 in
Weight: 28.33 lb
EPA: 2.15 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Pole-top mounting on Ø 2-3/8" tubes (with reducing ring) and on Ø 3" tubes (without reducing ring).
Flush-mounted on Ø 3-1/2" tubes.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Hydra

HYDRA


Design: Makio Hasuike

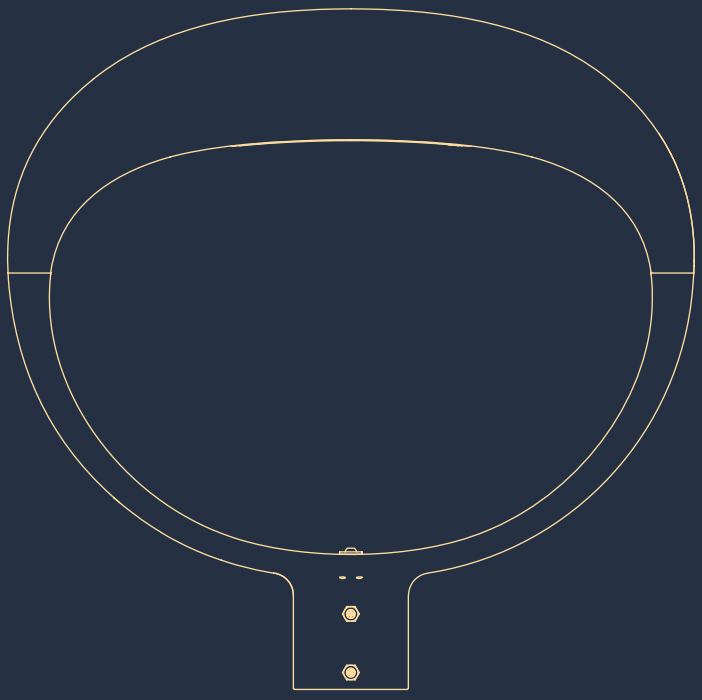

Hydra is characterised by its original oval shape. The LEDs are housed in a high-reflectance mixing chamber, protected by a tempered glass with a phosphor-coated surface to produce a warm light.

HYDRA | LUMINAIRE



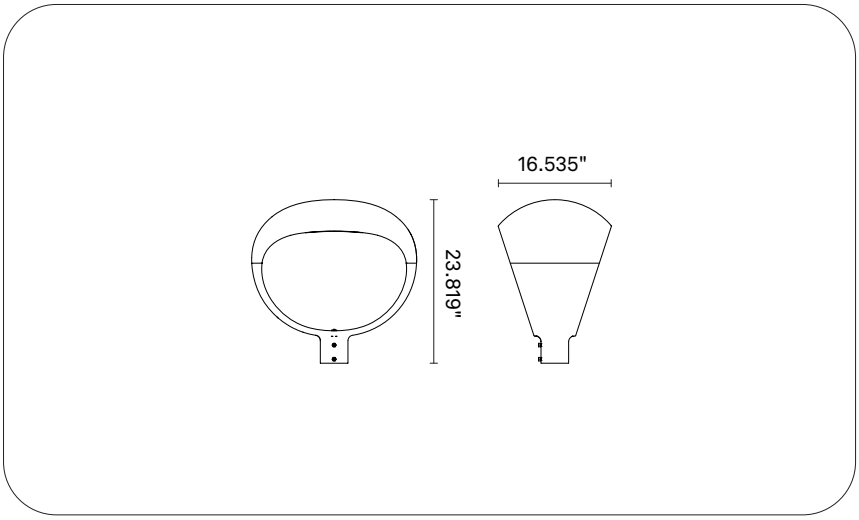

ORDERING INFORMATION / GUIDE

Example: **PNHYD-U-D45-830-L030-SO-V0-F02-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D45 T5	**830** Ra80 3000 K	**L030** 3000 lm	**SO** Opal	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
	840 Ra80 4000 K	**L040** 4000 lm					

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Senigallia, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 300-600 mA
Power rating: 28-42 W
Nominal Flux: 3000-4000 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 90% ULOR = 13%
LED quantity: 25
Cutoff Angle: Cutoff C = 90° γ = 24°
Luminous flux: 2703-3604 lm
Luminous efficacy: 75-84 lm/W
BUG: B=1, U=3, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 32-48 W
Voltage: 120V-277V~ 50/60Hz
Ambient temperature: -31 °F / +122 °F
Driver included: No


Cable type: 5GAWG18 SJTW

MECHANICAL CHARACTERISTICS
Structure made of cast aluminium (UNI EN 1706) with semi-oval upper and lower frames, designed respectively for housing the LED module and for mounting on Ø 2.36 in poles.
Internal part in galvanized and painted steel sheet.
LED module integrated into the upper frame with mixing chamber and flat remote-phosphor glass screen for optimal thermal dissipation.
Stainless steel screws.

Length: 24.016 in
Width: 16.535 in
Height: 23.819 in
Weight: 42.99 lb
EPA: 1.61 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Pole-top mounting on Ø 2-3/8" tubes (with reducing ring) and on Ø 3" tubes (without reducing ring).
Flush-mounted on Ø 3-1/2" tubes.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

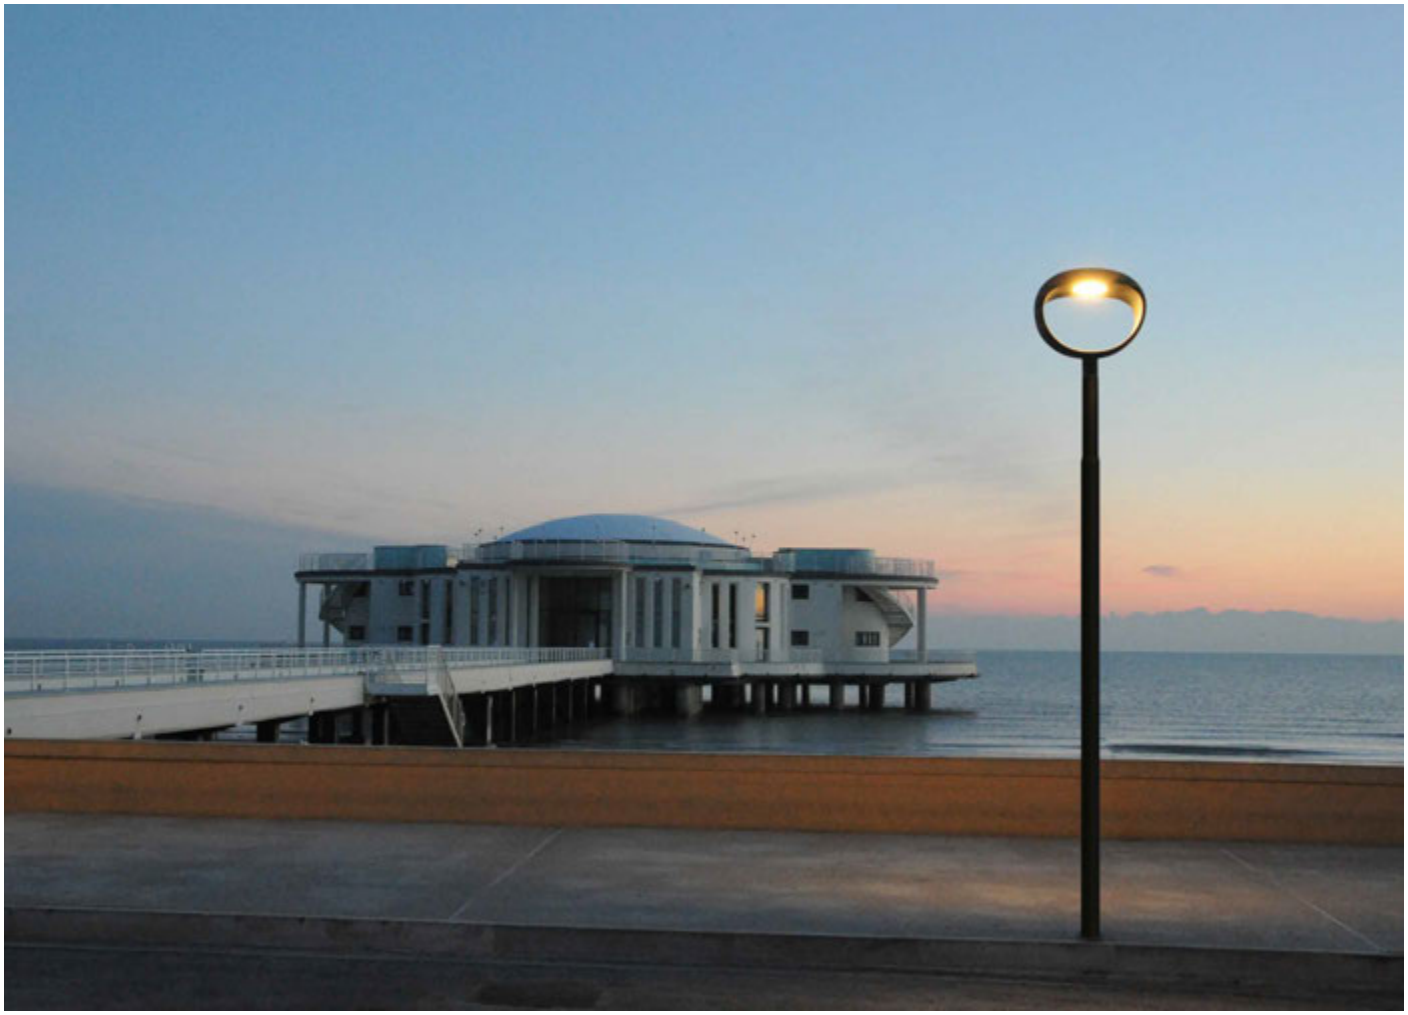




2 light sources 108
2 light sources | Blade 110

Lang

LANG


Design: Light Bureau part of AFRY

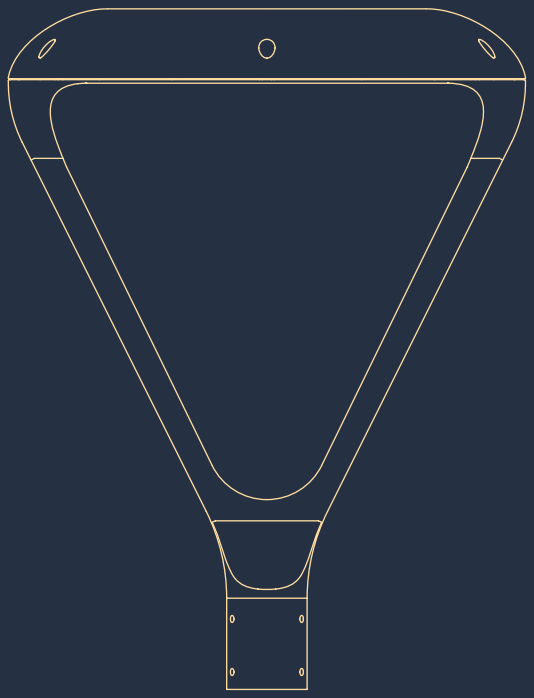

Lang is the award-winning post-top luminaire designed by Light Bureau - part of AFRY. Lang is a design tool that allows creative control of light. Its two independent sources, with four different light distributions, generate a luminous flux ranging from 1,500 to 15,000 lm, while the “blade” can be customised to enhance the identity of a place.

LANG | LUMINAIRE | 2 LIGHT SOURCES



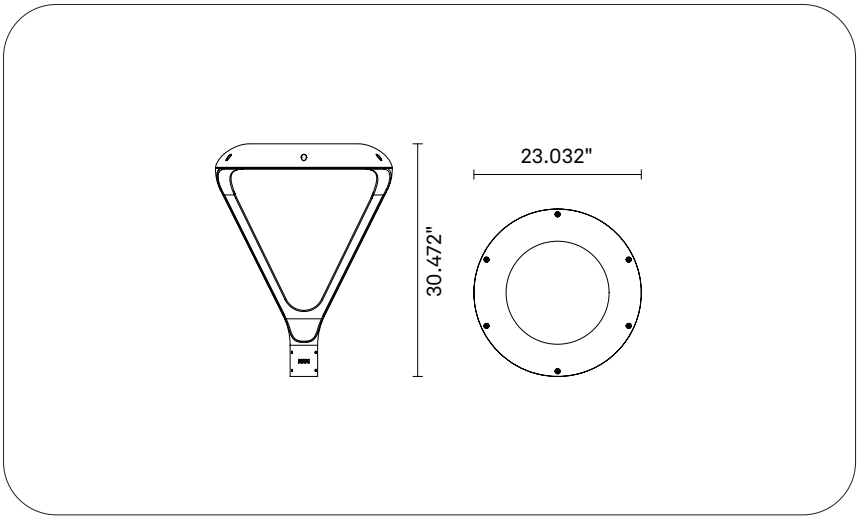

ORDERING INFORMATION / GUIDE

Example: **LULAN03-U-D03-827-L035-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D03 T2	**827** Ra80 2700 K	**L035** 3500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D06 T2 + T3	**830** Ra80 3000 K	**L045** 4500 lm	**SP** Prismatic		**F11** NEMA-3		
D12 T2 + T4	**840** Ra80 4000 K	**L050** 5000 lm					
D05 T3		**L053** 5300 lm					
D07 T3 + T3		**L068** 6800 lm					
D08 T3 + T4		**L070** 7000 lm					
D11 T4		**L075** 7500 lm					
D13 T4 + T4		**L113** 11300 lm					
D14 T5		**L120** 12000 lm					
		LX01 4500 lm + 4500 lm					
		LX02 6000 lm + 3000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Miami, USA
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 278-804 mA
Power rating: 24.7-110.8 W
Nominal Flux: 3500-12000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 84-85 Rg = 97-98
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 3x3 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 32, 48, 64
Cutoff Angle: Cutoff, Semi Cutoff C = 5, 215° γ = 2, 70°
Luminous flux: 3500-12000 lm
Luminous efficacy: 90-119 lm/W
BUG: B=1-3, U=1, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 30.1-125.2 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F
Driver included: Yes

Cable type: 5GAWG18 SJTW
Cable length: 3.281 ft
Surge protection: 6kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of cast and sheet aluminum (UNI EN 1706) with an internal extruded aluminum heat sink and a screw-open top cover.
Extra-clear prismatized flat glass screen with double screen and white polycarbonate recovery reflector.
Equipped with an osmotic valve for internal/external pressure balancing and a compartment designed for surge protection devices or remote control systems.
Stainless steel screws.

Diameter: 23.032 in
Height: 30.472 in
Weight: 41.34 lb
EPA: 1.61 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Post-top installation on Ø 2”, Ø 2 1/2”, and Ø 3” poles
Pole-top mounting on Ø 2-3/8″ tubes (with reducing ring) and on Ø 3″ tubes (without reducing ring).
Flush-mounted on Ø 3-1/2″ tubes.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



LANG | LUMINAIRE | 2 LIGHT SOURCES | BLADE



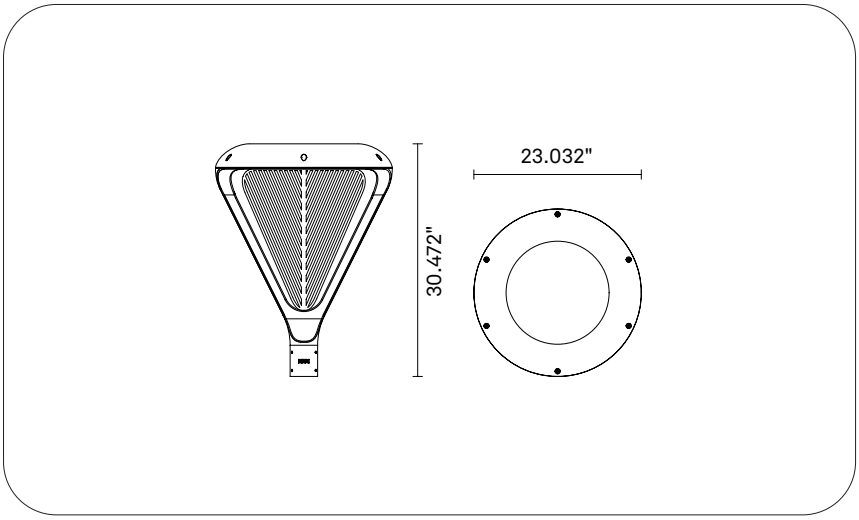

ORDERING INFORMATION / GUIDE

Example: **LULAN04-U-D07-827-L050-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D06 T2 + T3	**827** Ra80 2700 K	**L050** 5000 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D12 T2 + T4	**830** Ra80 3000 K	**L053** 5300 lm	**SP** Prismatic		**F11** NEMA-3		
D07 T3 + T3	**840** Ra80 4000 K	**L068** 6800 lm					
D08 T3 + T4		**L070** 7000 lm					
D13 T4 + T4		**L113** 11300 lm					
		L120 12000 lm					
		LX01 4500 lm + 4500 lm					
		LX02 6000 lm + 3000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Dubai, UAE
Photographer: Antonio Neri
Lighting design project: Stefano Dall'Osso

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 278-804 mA
Power rating: 37.1-110.8 W
Nominal Flux: 5000-12000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 84-85 Rg = 97-98
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 3x3 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 32, 48, 64
Cutoff Angle: Cutoff, Semi Cutoff C = 5, 215° γ = 2, 70°
Luminous flux: 5000-12000 lm
Luminous efficacy: 90-119 lm/W
BUG: B=1-3, U=1, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 44.1-125.2 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F
Driver included: Yes

Cable type: 5GAWG18 SJTW
Cable length: 3.281 ft
Surge protection: 6kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of cast and sheet aluminum (UNI EN 1706) with an internal extruded aluminum heat sink and a screw-open top cover.
Extra-clear prismatized flat glass screen with double screen and white polycarbonate recovery reflector.
Equipped with an osmotic valve for internal/external pressure balancing and a compartment designed for surge protection devices or remote control systems.
Stainless steel screws.

Diameter: 23.032 in
Height: 30.472 in
Weight: 41.34 lb
EPA: 1.61 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Post-top installation on Ø 2”, Ø 2 1/2”, and Ø 3” poles
Pole-top mounting on Ø 2-3/8″ tubes (with reducing ring) and on Ø 3″ tubes (without reducing ring).
Flush-mounted on Ø 3-1/2″ tubes.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Post top entry 114
Suspended 116

Light 21

LIGHT 21


Design: Neri

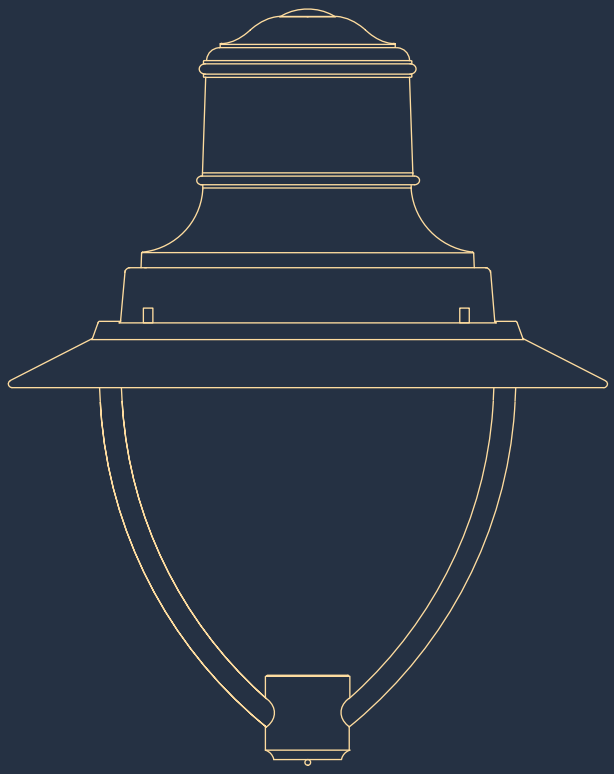

Versatile and robust, Light 21 completes every urban space with its distinctive design.

LIGHT 21 | LUMINAIRE | POST TOP ENTRY



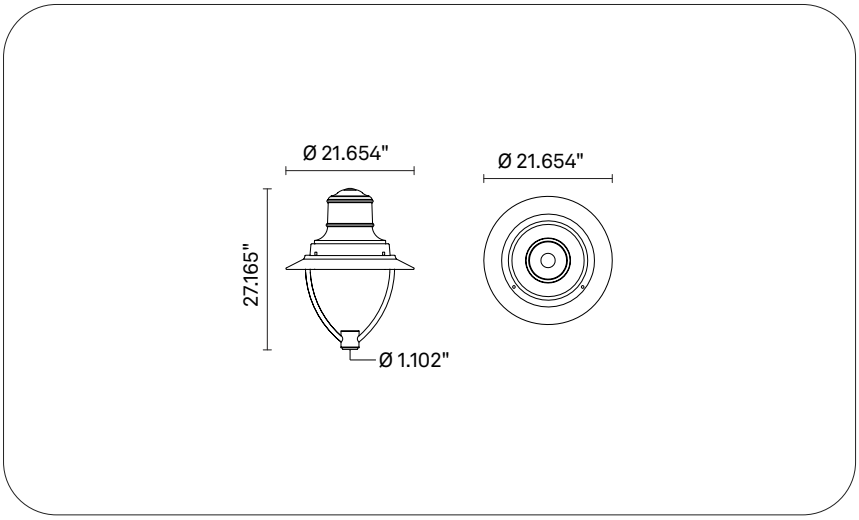

ORDERING INFORMATION / GUIDE

Example: **LU21000-U-D28-822-L025-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L025** 2500 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L035** 3500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L045** 4500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L060** 6000 lm					
D37 T3 medium		**L075** 7500 lm					
D24 T4 wide		**L090** 9000 lm					
D38 T4 medium		**L105** 10500 lm					
D30 T5 square medium		**L120** 12000 lm					
		L135 13500 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Oria, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 334-862 mA
Power rating: 14.4-93.8 W
Nominal Flux: 2500-13500 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Semi Cutoff C = 5, 50° γ = 44, 54°
Luminous flux: 2500-13500 lm
Luminous efficacy: 110-144 lm/W
BUG: B=1-3, U=0, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 17.4-105 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -40 °F / +122 °F

Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast and sheet aluminum (UNI EN 1706) with an upper frame equipped with a G3/4" threaded connection for mounting to the support, and a lower tilting die-cast frame for access to the auxiliary compartment.
Protective shield made of extra-clear tempered glass, internal reflector, and EPDM gasket between the glass and reflector.
Compartment prepared for additional surge protectors or remote monitoring systems, with stainless steel fastening elements and hot-dip galvanized steel supports.


Diameter: 21.654 in
Height: 27.165 in
Weight: 24.03 lb
EPA: 0.54 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Pole-top: flange with a Ø 1-1/8" central hole for fastening to the support.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



LIGHT 21 | LUMINAIRE | SUSPENDED



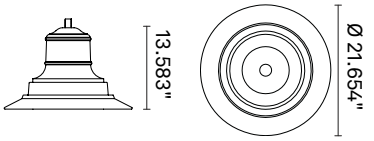

ORDERING INFORMATION / GUIDE

Example: **LU21001-U-D28-822-L025-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L025** 2500 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L035** 3500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L045** 4500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L060** 6000 lm					
D37 T3 medium		**L075** 7500 lm					
D24 T4 wide		**L090** 9000 lm					
D38 T4 medium		**L105** 10500 lm					
D30 T5 square medium		**L120** 12000 lm					
		L135 13500 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Genzano di Lucania, Italia
Photographer: disto89

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 334-862 mA
Power rating: 14.4-93.8 W
Nominal Flux: 2500-13500 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Semi Cutoff C = 5, 50° γ = 44, 54°
Luminous flux: 2500-13500 lm
Luminous efficacy: 110-144 lm/W
BUG: B=1-3, U=0, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 17.4-105 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -40 °F / +122 °F
Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast and sheet aluminum (UNI EN 1706) with an upper frame equipped with a G3/4" threaded connection and a lower tilting die-cast frame for access to the auxiliary compartment.
Reflector and heat sink integrated in die-cast aluminum with IK10 impact resistance (EN 62262).
Protective shield in extra-clear tempered glass, EPDM seal between glass and reflector, and compartment prepared for additional surge protectors or remote monitoring systems.
Stainless steel fastening elements.

Diameter: 21.654 in
Height: 13.583 in
Weight: 20.28 lb
EPA: 0.54 ft²
Protection degree: IP66
Mechanical resistance: IK10

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Post top entry 120
Suspended 122

Light 500

LIGHT 500


Design: Neri

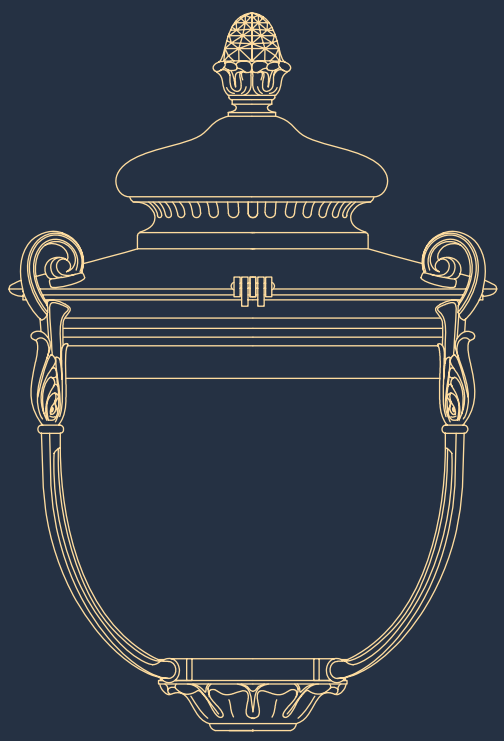

Iconic lantern in die cast and sheet aluminium, equipped with acrylic frosted transparent screen, two available distributions and a luminous flux up to 7,500 lm.

LIGHT 500 | LUMINAIRE | POST TOP ENTRY



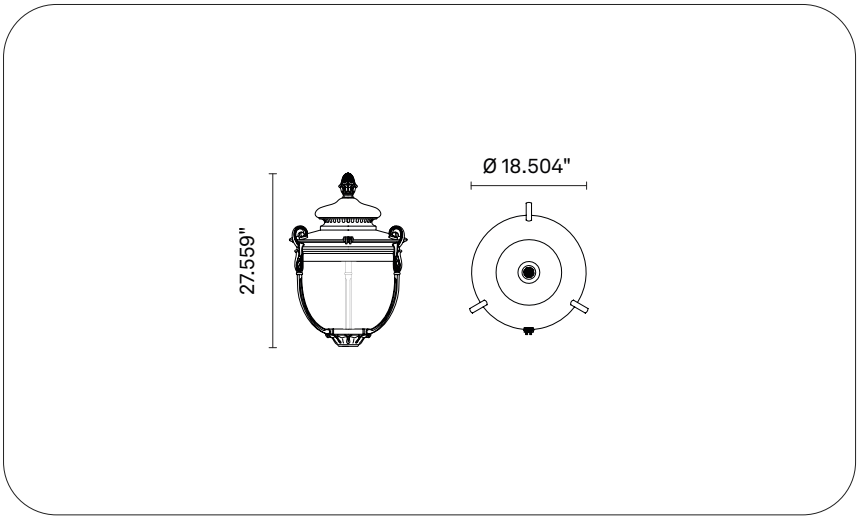

ORDERING INFORMATION / GUIDE

Example: **LU50000-U-D28-822-L015-SG-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**SG** Frosted	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium		**L060** 6000 lm					
D24 T4 wide							
D38 T4 medium							
D30 T5 square medium							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Irvine Spectrum Center, USA
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 234-742 mA
Power rating: 10-50 W
Nominal Flux: 1500-6000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 7%
LED quantity: 16, 24
Cutoff Angle: Non Cutoff, Semi Cutoff C = 10, 50° γ = 56, 66°
Luminous flux: 1500-6000 lm
Luminous efficacy: 93-123 lm/W
BUG: B=1-2, U=3, G=1-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 12.2-58.3 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -22 °F / +122 °F
Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an upper circular tilting frame, hinged to the lower frame and equipped with a decorative finial.
Lower frame consisting of a ring and three curved decorative uprights, attached to a flange with a Ø 1.10 in hole for mounting on the support and for internal cable routing.
Full basket shield in satin-finished polymethyl methacrylate (PMMA) with IK06 impact resistance (EN 62262) and stainless steel screws.

Diameter: 18.504 in
Height: 27.559 in
Weight: 27.56 lb
EPA: 2.15 ft²
Protection degree: IP43
Mechanical resistance: IK06


INSTALLATION
Pole-top: flange with a Ø 1-1/8" central hole for fastening to the support.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



LIGHT 500 | LUMINAIRE | SUSPENDED



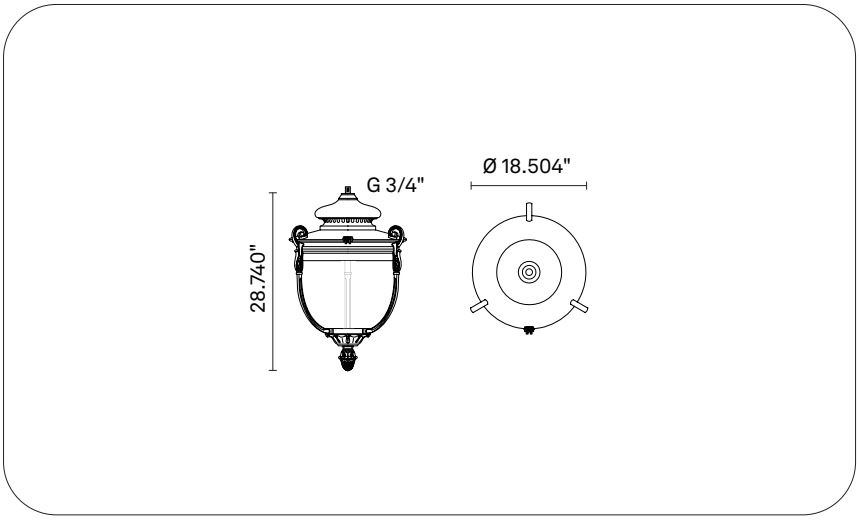

ORDERING INFORMATION / GUIDE

Example: **LU50001-U-D28-822-L015-SG-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**SG** Frosted	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium		**L060** 6000 lm					
D24 T4 wide							
D38 T4 medium							
D30 T5 square medium							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: The Village at Meridian - Meridian, USA
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 234-742 mA
Power rating: 10-50 W
Nominal Flux: 1500-6000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 7%
LED quantity: 16, 24
Cutoff Angle: Non Cutoff, Semi Cutoff C = 10, 50° γ = 56, 66°
Luminous flux: 1500-6000 lm
Luminous efficacy: 93-123 lm/W
BUG: B=1-2, U=3, G=1-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 12.2-58.3 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -22 °F / +122 °F
Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an upper circular tilting frame, hinged to the lower frame and equipped with a decorative finial.
Lower frame consisting of a ring and three curved decorative uprights, attached to a flange with a Ø 1.10 in hole for mounting on the support and for internal cable routing.
Full basket shield in satin-finished polymethyl methacrylate (PMMA) with IK06 impact resistance (EN 62262) and stainless steel screws.

Diameter: 18.504 in
Height: 28.74 in
Weight: 27.56 lb
EPA: 2.15 ft²
Protection degree: IP43
Mechanical resistance: IK06

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Post top entry	126
Suspended	128

Light 600

LIGHT 600


Design: Neri

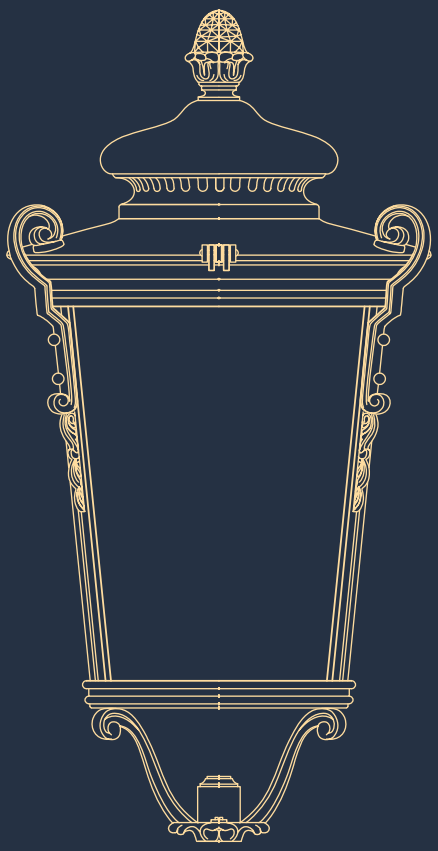

Elegant, high-quality lantern made of die-cast and sheet aluminium, with a transparent frosted polymethylmethacrylate diffuser. Equipped with two light distributions and a luminous flux of up to 7,500 lm.

LIGHT 600 | LUMINAIRE | POST TOP ENTRY



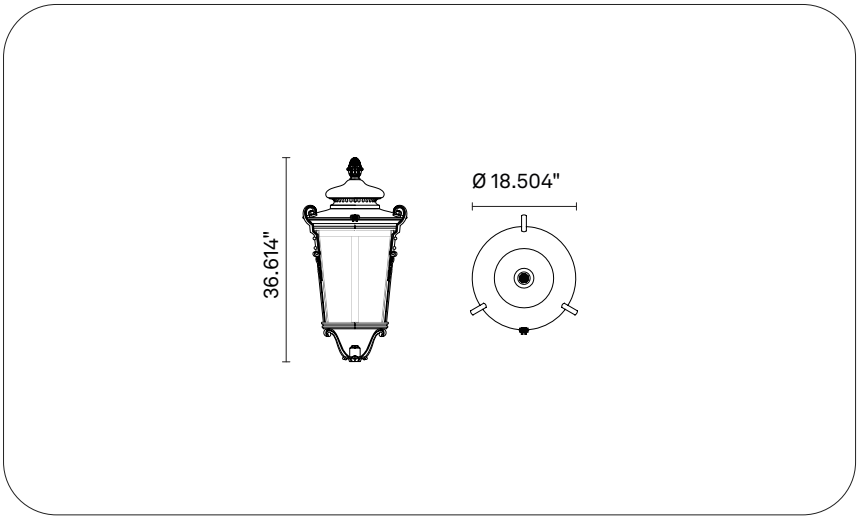

ORDERING INFORMATION / GUIDE

Example: **LU60000-U-D28-822-L015-SG-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**SG** Frosted	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium		**L060** 6000 lm					
D24 T4 wide							
D38 T4 medium							
D30 T5 square medium							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: The Village at Meridian - Meridian, USA
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 234-742 mA
Power rating: 10-50 W
Nominal Flux: 1500-6000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 7%
LED quantity: 16, 24
Cutoff Angle: Non Cutoff, Semi Cutoff C = 10, 50° γ = 56, 66°
Luminous flux: 1500-6000 lm
Luminous efficacy: 93-123 lm/W
BUG: B=1-2, U=3, G=1-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 12.2-58.3 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -22 °F / +122 °F

Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an upper circular tilting frame, hinged to the lower frame and equipped with a decorative finial.
Lower frame consisting of a ring and three curved decorative uprights, connected in a tripod with a flange and a Ø 1.10 in hole for mounting to the support; the electrical cable is inserted in an internal tube near a vertical upright.
Full basket shield in satin-finished polymethyl methacrylate (PMMA) with IK06 impact resistance (EN 62262) and stainless steel screws.

Diameter: 18.504 in
Height: 36.614 in
Weight: 28.66 lb
EPA: 1.83 ft²
Protection degree: IP43
Mechanical resistance: IK06


INSTALLATION
Pole-top: flange with a Ø 1-1/8" central hole for fastening to the support.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



LIGHT 600 | LUMINAIRE | SUSPENDED



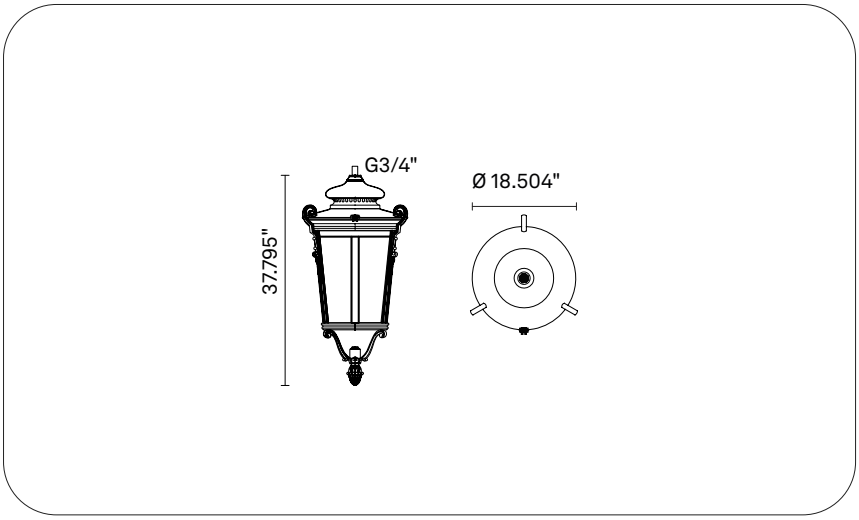

ORDERING INFORMATION / GUIDE

Example: **LU60001-U-D28-822-L015-SG-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**SG** Frosted	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium		**L060** 6000 lm					
D24 T4 wide							
D38 T4 medium							
D30 T5 square medium							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Mayagüez, PRI
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 234-742 mA
Power rating: 10-50 W
Nominal Flux: 1500-6000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 7%
LED quantity: 16, 24
Cutoff Angle: Non Cutoff, Semi Cutoff C = 10, 50° γ = 56, 66°
Luminous flux: 1500-6000 lm
Luminous efficacy: 93-123 lm/W
BUG: B=1-2, U=3, G=1-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 12.2-58.3 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -22 °F / +122 °F
Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an upper circular tilting frame, hinged to the lower frame and equipped with a decorative finial.
Lower frame consisting of two rings and three decorative uprights, connected in a tripod with a decorative finial.
Full basket shield in satin-finished polymethyl methacrylate (PMMA) with IK06 impact resistance (EN 62262) and stainless steel screws.

Diameter: 18.504 in
Height: 37.795 in
Weight: 28.66 lb
EPA: 1.83 ft²
Protection degree: IP43
Mechanical resistance: IK06

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Post top entry 132
Suspended 134

Light 700

LIGHT 700


Design: Neri

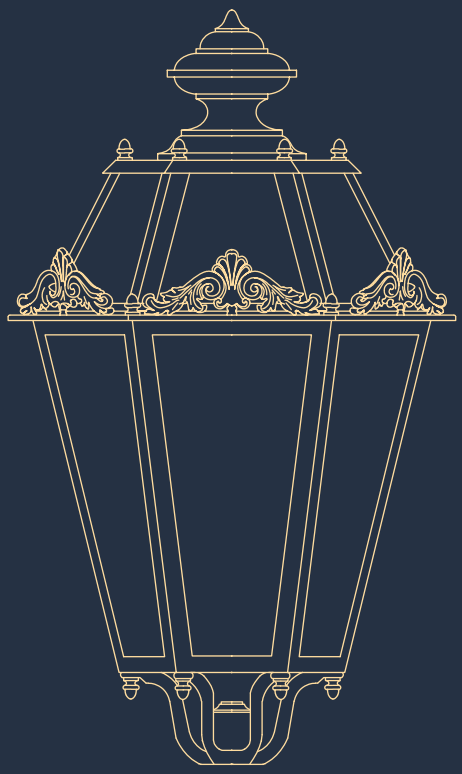

Elegant, high-quality lantern made of die-cast and sheet aluminium, with a transparent frosted polymethylmethacrylate diffuser. Equipped with five light distributions and a luminous flux of up to 7,500 lm.

LIGHT 700 | LUMINAIRE | POST TOP ENTRY



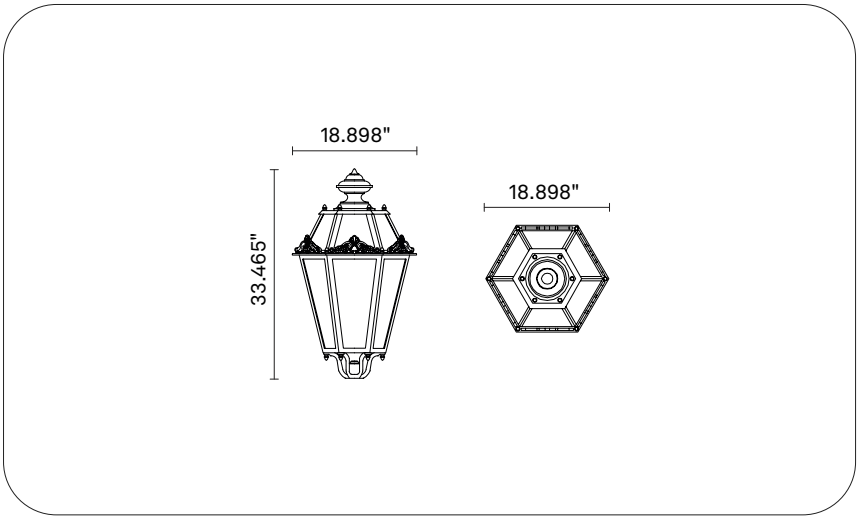

ORDERING INFORMATION / GUIDE

Example: **LU70000-U-D28-822-L015-SG-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**SG** Frosted	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium							
D24 T4 wide							
D38 T4 medium							
D30 T5 square medium							

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Orlando, USA
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 304-792 mA
Power rating: 13.1-53.5 W
Nominal Flux: 1500-4500 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 14%
LED quantity: 16, 24
Cutoff Angle: Non Cutoff, Semi Cutoff C = 25, 90° γ = 52, 58°
Luminous flux: 1500-4500 lm
Luminous efficacy: 72-94 lm/W
BUG: B=1-2, U=3, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 15.9-62.1 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -22 °F / +122 °F
Driver included: Yes

Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an upper hexagonal tilting frame for access to the auxiliary and optical compartment, made of aluminum casting with six galvanized steel sheet panels and six decorative brass cast finials.
Hexagonal lower frame in cast aluminium with a six-legged base equipped with a Ø 1.10 in flange for mounting to the support and internal cable passage along one upright.
Removable wiring plate in galvanized steel, reflector plate in white PMMA, satin-finished side screens in PMMA, and clear tempered glass protecting the LEDs.
Stainless steel screws.

Diameter: 18.898 in
Height: 33.465 in
Weight: 26.46 lb
EPA: 1.61 ft²
Protection degree: IP43
Mechanical resistance: IK06


INSTALLATION
Pole-top: flange with a Ø 1-1/8" central hole for fastening to the support.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



LIGHT 700 | LUMINAIRE | SUSPENDED



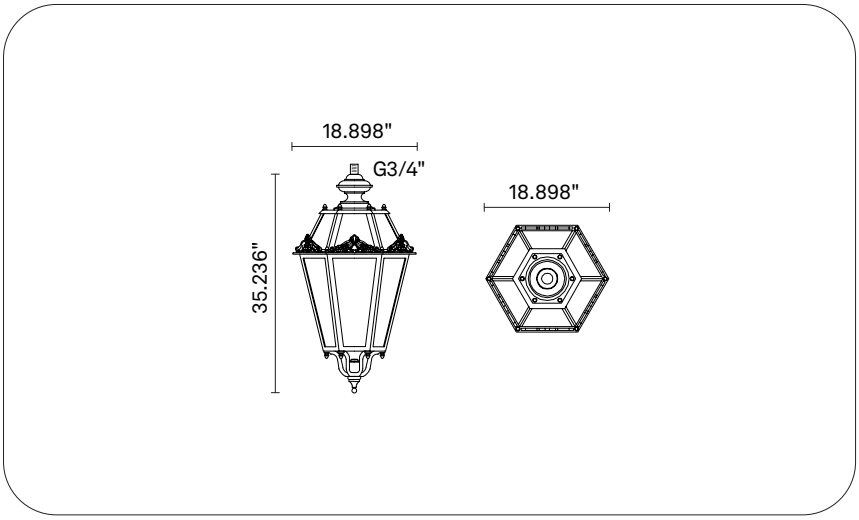

ORDERING INFORMATION / GUIDE

Example: **LU70001-U-D28-822-L015-SG-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**SG** Frosted	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm					
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium							
D24 T4 wide							
D38 T4 medium							
D30 T5 square medium							

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 304-792 mA
Power rating: 13.1-53.5 W
Nominal Flux: 1500-4500 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 14%
LED quantity: 16, 24
Cutoff Angle: Non Cutoff, Semi Cutoff C = 25, 90° γ = 52, 58°
Luminous flux: 1500-4500 lm
Luminous efficacy: 72-94 lm/W
BUG: B=1-2, U=3, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 15.9-62.1 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -22 °F / +122 °F

Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an upper hexagonal tilting frame for access to the auxiliary and optical compartment, made of aluminum casting with six galvanized steel sheet panels and six decorative brass cast finials.
Hexagonal lower frame in cast aluminium with a six-legged base equipped with a Ø 1.10 in flange for mounting to the support and internal cable passage along one upright.
Removable wiring plate in galvanized steel, reflector plate in white PMMA, satin-finished side screens in PMMA, and clear tempered glass protecting the LEDs.
Stainless steel screws.

Diameter: 18.898 in
Height: 35.236 in
Weight: 27.56 lb
EPA: 1.61 ft²
Protection degree: IP43
Mechanical resistance: IK06

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Post top entry 138
Suspended 140

Light 804

LIGHT 804


Design: Neri

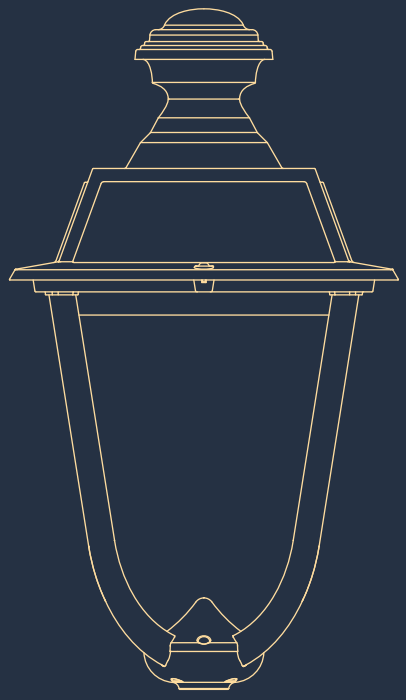

Light 804 was designed to offer an absolutely unique artificial light experience, together with energy savings and reduced glare.

LIGHT 804 | LUMINAIRE | POST TOP ENTRY



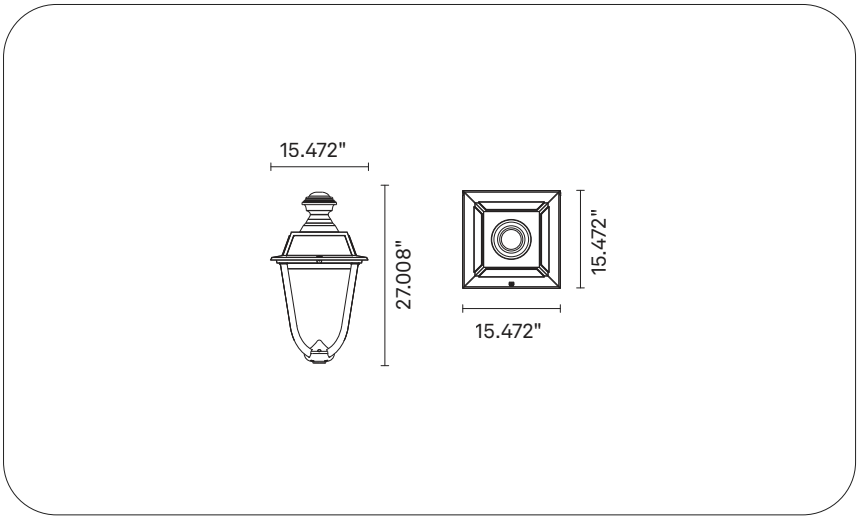

ORDERING INFORMATION / GUIDE

Example: **LU80400-U-D36-830-L045-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm	**SP** Prismatic				
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium		**L060** 6000 lm					
D24 T4 wide		**L075** 7500 lm					
D38 T4 medium							
D30 T5 square medium							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Sperlonga, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 222-620 mA
Power rating: 9.5-55.1 W
Nominal Flux: 1500-7500 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 85° γ = 46, 68°
Luminous flux: 1500-7500 lm
Luminous efficacy: 96-129 lm/W
BUG: B=0-3, U=1, G=0-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 11.6-63.8 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -13 °F / +122 °F

Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminium (UNI EN 1706) with a hinged upper frame and a lower square frame with four curved uprights and a 1.10-inch lower flange for mounting to the support.
Shield in extra-clear or prismatic tempered glass with IK09/IK07 impact resistance (EN 62262).
White internal reflector, silicone seal between the frames, and stainless steel fastening hardware.
Compartment dedicated to additional surge protectors or remote monitoring systems.

Length: 15.472 in
Width: 15.472 in
Height: 27.008 in
Weight: 20.06 lb
EPA: 1.08 ft²
Protection degree: IP66
Mechanical resistance: IK09


INSTALLATION
Pole-top: flange with a Ø 1-1/8" central hole for fastening to the support.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



LIGHT 804 | LUMINAIRE | SUSPENDED



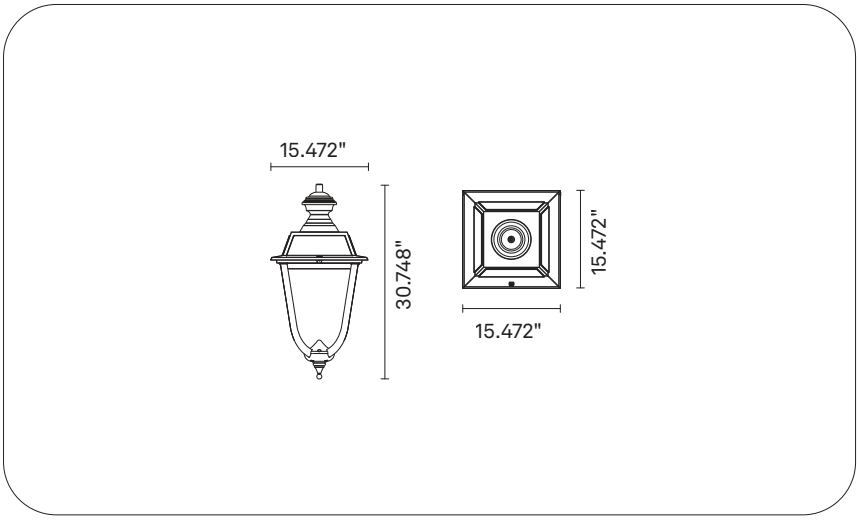

ORDERING INFORMATION / GUIDE

Example: **LU80401-U-D22-830-L025-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**822** Ra80 2200 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**827** Ra80 2700 K	**L025** 2500 lm	**SP** Prismatic				
D22 T3 narrow	**830** Ra80 3000 K	**L035** 3500 lm					
D25 T2 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D37 T3 medium		**L060** 6000 lm					
D24 T4 wide		**L075** 7500 lm					
D38 T4 medium							
D30 T5 square medium							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Bitonto, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 222-620 mA
Power rating: 9.5-55.1 W
Nominal Flux: 1500-7500 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-86 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 85° γ = 46, 68°
Luminous flux: 1500-7500 lm
Luminous efficacy: 96-129 lm/W
BUG: B=0-3, U=1, G=0-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 11.6-63.8 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -13 °F / +122 °F

Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminium (UNI EN 1706) with a hinged upper frame and a lower square frame with four curved uprights and a 1.10-inch lower flange for mounting to the support.
Shield in extra-clear or prismatic tempered glass with IK09/IK07 impact resistance (EN 62262).
White internal reflector, silicone seal between the frames, and stainless steel fastening hardware.
Compartment dedicated to additional surge protectors or remote monitoring systems.

Length: 15.472 in
Width: 15.472 in
Height: 30.748 in
Weight: 21.16 lb
EPA: 1.08 ft²
Protection degree: IP66
Mechanical resistance: IK09

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Lyra

LYRA

Design: Neri

UPDATE


Quick Ship Program

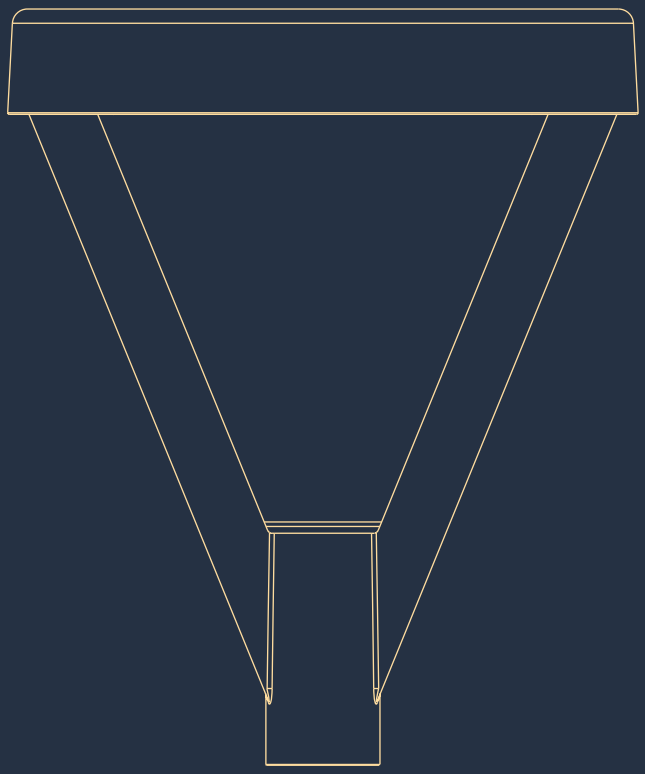

Characterized by simple, geometric lines, six lighting distributions, a choice of two glass types as screens, and luminous packages up to 7,500 lumens, Lyra meets the optical needs of today's architects, engineers, and lighting designers.

LYRA | LUMINAIRE | LYRA



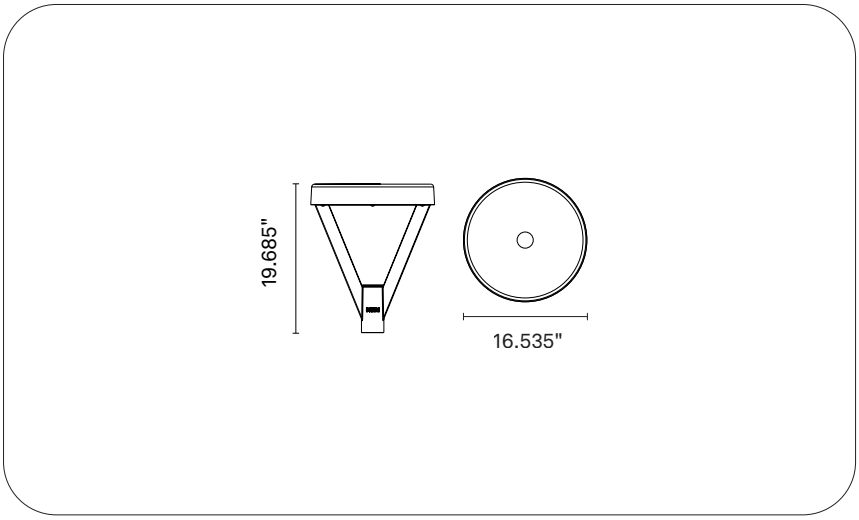

ORDERING INFORMATION / GUIDE

Example: **LULYR00-U-D36-827-L015-SP-V0-F02-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D46 AFR/SPORT N	**827** Ra80 2700 K	**L015** 1500 lm	**SP** Prismatic	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**830** Ra80 3000 K	**L018** 1800 lm		**V3** 347V-480V	**F11** NEMA-3		
D47 AFR/SPORT W	**840** Ra80 4000 K	**L025** 2500 lm			**F12** NEMA-7		
D48 T2 wide	**XAM** Amber	**L035** 3500 lm					
D22 T3 narrow		**L045** 4500 lm					
D25 T2 narrow		**L060** 6000 lm					
D37 T3 medium		**L075** 7500 lm					
D24 T4 wide		**L090** 9000 lm					
D38 T4 medium							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: , D, E
LED forward current: 240-820 mA
Power rating: 10.3-74.1 W
Nominal Flux: 1500-9000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32
Cutoff Angle: Cutoff, Semi Cutoff C = 20, 150° γ = 28, 73°
Luminous flux: 1500-9000 lm
Luminous efficacy: 28-120 lm/W
BUG: B=0-3, U=0-1, G=0-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 12.5-84 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Cable type: 5GAWG18 SJTW
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with an upper frame openable via screws and provision for auxiliary devices compliant with Zhaga Book 18.
Lower fork in die-cast aluminum with white internal reflector.
Extra-clear or prismatic tempered glass shield with IK09/IK08 impact resistance (EN 62262) and silicone seal between upper frame and shield.
Stainless steel screws.

Diameter: 16.535 in
Height: 19.685 in
Weight: 25.46 lb
EPA: 0.43 ft²
Protection degree: IP66
Mechanical resistance: IK09

INSTALLATION
Pole-top mounting on Ø 2-3/8" tubes (with reducing ring) and on Ø 3" tubes (without reducing ring).
Flush-mounted on Ø 3-1/2" tubes.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Nebula L

NEBULA L

Design: Skidmore, Owings & Merrill (SOM)


UPDATE



We joined forces with American architects Skidmore, Owings & Merrill (SOM) with the ambition of creating a lighting system that blends seamlessly into any urban landscape, while enhancing public space through a contemporary and recognisable design. Nebula L is one of the system's projectors.

NEBULA L | LUMINAIRE



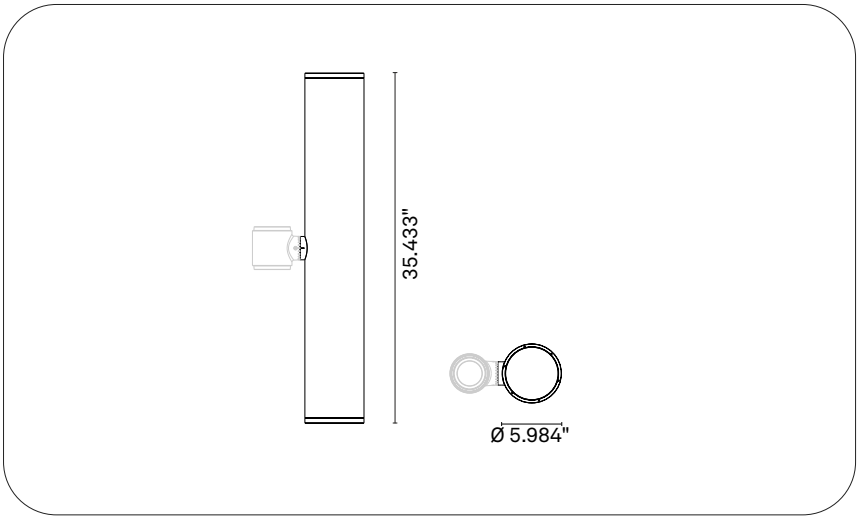

ORDERING INFORMATION / GUIDE

Example: **LUNEBL0-U-D66-827-L025-ST-V0-F49-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D67 Wide Flood	**827** Ra80 2700 K	**L011** 1100 lm	**ST** Transparent	**V0** 120V-277V	**F49** 1-10V	**MU** UL	**CN0** Grey [Neri] Textured
D66 Flood	**830** Ra80 3000 K	**L025** 2500 lm	**SP** Prismatic				
D02 T2	**840** Ra80 4000 K	**L035** 3500 lm					
D22 T3 narrow	**XAM** Amber	**L045** 4500 lm					
D10 T4		**L060** 6000 lm					
D30 T5 square medium							
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: 10 & 120 South Riverside Plaza - Chicago, USA
Photographer: Antonio Neri
Architectural project: Solomon Coldwell Buenz (SCB)
Lighting design project: Schuler Shook (Chicago)

SOURCE
COB LED.

Energy-efficiency class: D
LED forward current: 336-960 mA
Power rating: 16.4-47.7 W
Nominal Flux: 1100-6000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L80 = 75000 h (Ts = 105 °C, 2200 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 1, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 75° γ = 0, 54°
Luminous flux: 1100-6000 lm
Luminous efficacy: 24-123 lm/W
BUG: B=1-3, U=0, G=0-1
Photobiological safety: RG0 - Exempt risk, RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 20.3-55.8 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 29.528 ft

Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.
Protective screen in extra-clear tempered flat glass, transparent or prismatized, with silicone gaskets and exposed stainless steel or burnished screws.
Central aluminum sheet cover for access to the tilt adjustment compartment.
Equipped with an osmotic valve for internal/external pressure balancing.

Diameter: 5.984 in
Height: 35.433 in
Weight: 15.43 lb
EPA: 0.54 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Fixing via adjustable joint with continuous ±45° regulation and locking by means of two M6 grub screws with stainless steel locknuts.
Tilt-adjustable joint.
Continuous adjustment with no fixed steps.
Secured by four M8 stainless steel set screws with locknuts.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.





Nebula S

NEBULA S

Design: Skidmore, Owings & Merrill (SOM)


UPDATE



We joined forces with American architects Skidmore, Owings & Merrill (SOM) with the ambition of creating a lighting system that blends seamlessly into any urban landscape, while enhancing public space through a contemporary and recognisable design. Nebula S is one of the system's projectors.

NEBULA S | LUMINAIRE



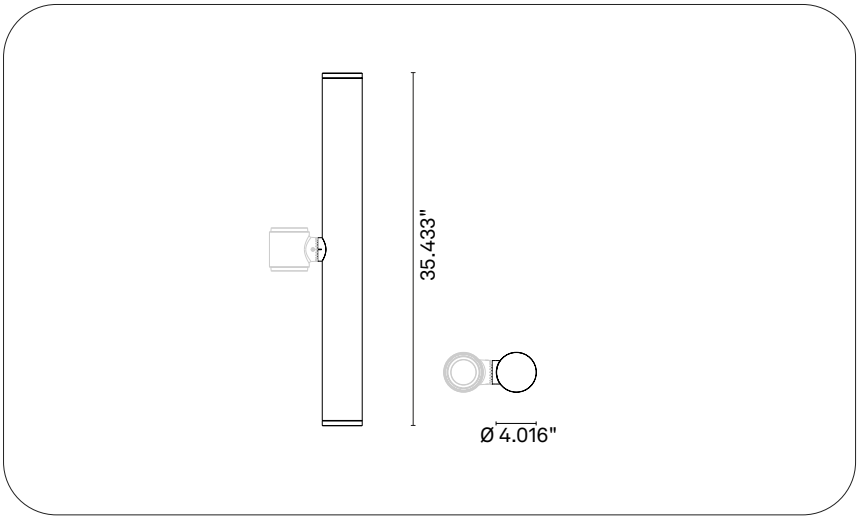

ORDERING INFORMATION / GUIDE

Example: **LUNEBS0-U-D66-827-L015-ST-V0-F49-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D67 Wide Flood	**827** Ra80 2700 K	**L006** 600 lm	**ST** Transparent	**V0** 120V-277V	**F49** 1-10V	**MU** UL	**CN0** Grey [Neri] Textured
D68 Very Wide Flood	**830** Ra80 3000 K	**L015** 1500 lm	**SP** Prismatic				
D66 Flood	**840** Ra80 4000 K	**L025** 2500 lm					
D02 T2	**XAM** Amber						
D22 T3 narrow							
D10 T4							
D30 T5 square medium							
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Loews Miami Beach Hotel - Miami, USA
Photographer: Antonio Neri

SOURCE
COB LED.

Energy-efficiency class: C
LED forward current: 316-700 mA
Power rating: 10.4-22.5 W
Nominal Flux: 550-2500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 1, 12
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 0, 48°
Luminous flux: 550-2500 lm
Luminous efficacy: 25-117 lm/W
BUG: B=0-2, U=0-1, G=0-1
Photobiological safety: RG0 - Exempt risk, RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 12.8-25.7 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 29.528 ft

Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.
Protective screen in extra-clear tempered flat glass, transparent or prismatized, with silicone gaskets and exposed stainless steel or burnished screws.
Central aluminum sheet cover for access to the tilt adjustment compartment.
Equipped with an osmotic valve for internal/external pressure balancing.

Diameter: 4.016 in
Height: 35.433 in
Weight: 11.02 lb
EPA: 0.54 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Fixing via adjustable joint with continuous ±45° regulation and locking by means of two M6 grub screws with stainless steel locknuts.
Tilt-adjustable joint.
Continuous adjustment with no fixed steps.
Secured by four M8 stainless steel set screws with locknuts.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Nebula Venezia

NEBULA VENEZIA


Design: Skidmore, Owings & Merrill (SOM)

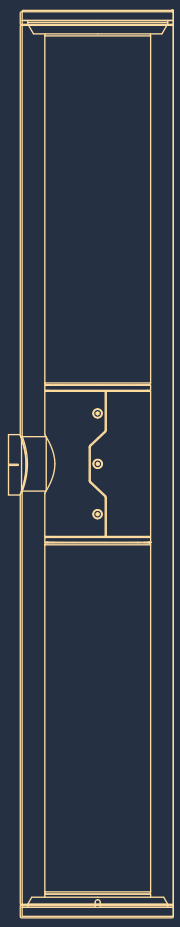

Nebula Venezia restores light's own creative potential. Its transparency evokes the ancient glassmaking tradition that has always enchanted our urban landscapes, both day and night. Nebula Venezia is light that becomes culture.

NEBULA VENEZIA | LUMINAIRE



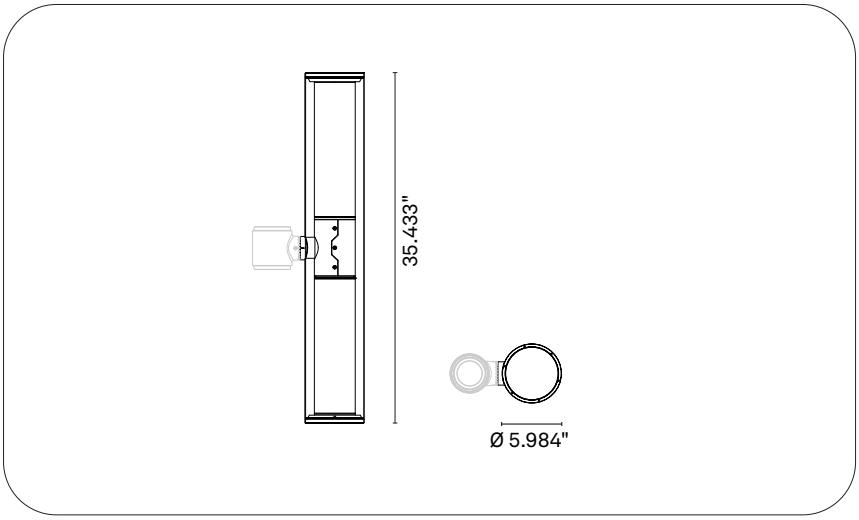

ORDERING INFORMATION / GUIDE

Example: **LUNEBV0-U-D03-830-L015-SP-V0-F35-MU-CGT**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D29 Medium Wide Flood	**827** Ra80 2700 K	**L010** 1000 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CGT** Gray [RAL 9006] TXT + Clear ribbed
D69 Wide Flood	**830** Ra80 3000 K	**L015** 1500 lm	**SP** Prismatic				
D33 Flood	**840** Ra80 4000 K	**L025** 2500 lm					
D16 Flood							
D01 T1							
D03 T2							
D11 T4							
D14 T5							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
COB LED.

Energy-efficiency class: D, E
LED forward current: 161-816 mA
Power rating: 7.5-20.1 W
Nominal Flux: 1000-2500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3, ≤5
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA),
L80 = 75000 h (Ts = 105 °C, 2200 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 1, 8
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 90° γ = 0, 48°
Luminous flux: 1000-2500 lm
Luminous efficacy: 69-115 lm/W
BUG: B=0-2, U=0-2, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 9.5-23.2 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 29.528 ft


Surge protection: 10kV CM - 6kV DM, 6kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.
Protective screen in extra-clear tempered flat glass, transparent or prismatized, with silicone gaskets and exposed stainless steel or burnished screws.
Central aluminum sheet cover for access to the tilt adjustment compartment.
Equipped with an osmotic valve for internal/external pressure balancing.

Diameter: 6.102 in
Height: 35.433 in
Weight: 15.43 lb
EPA: 1.51 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Fixing via adjustable joint with continuous ±45° regulation and locking by means of two M6 grub screws with stainless steel locknuts.
Tilt-adjustable joint.
Continuous adjustment with no fixed steps.
Secured by four M8 stainless steel set screws with locknuts.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

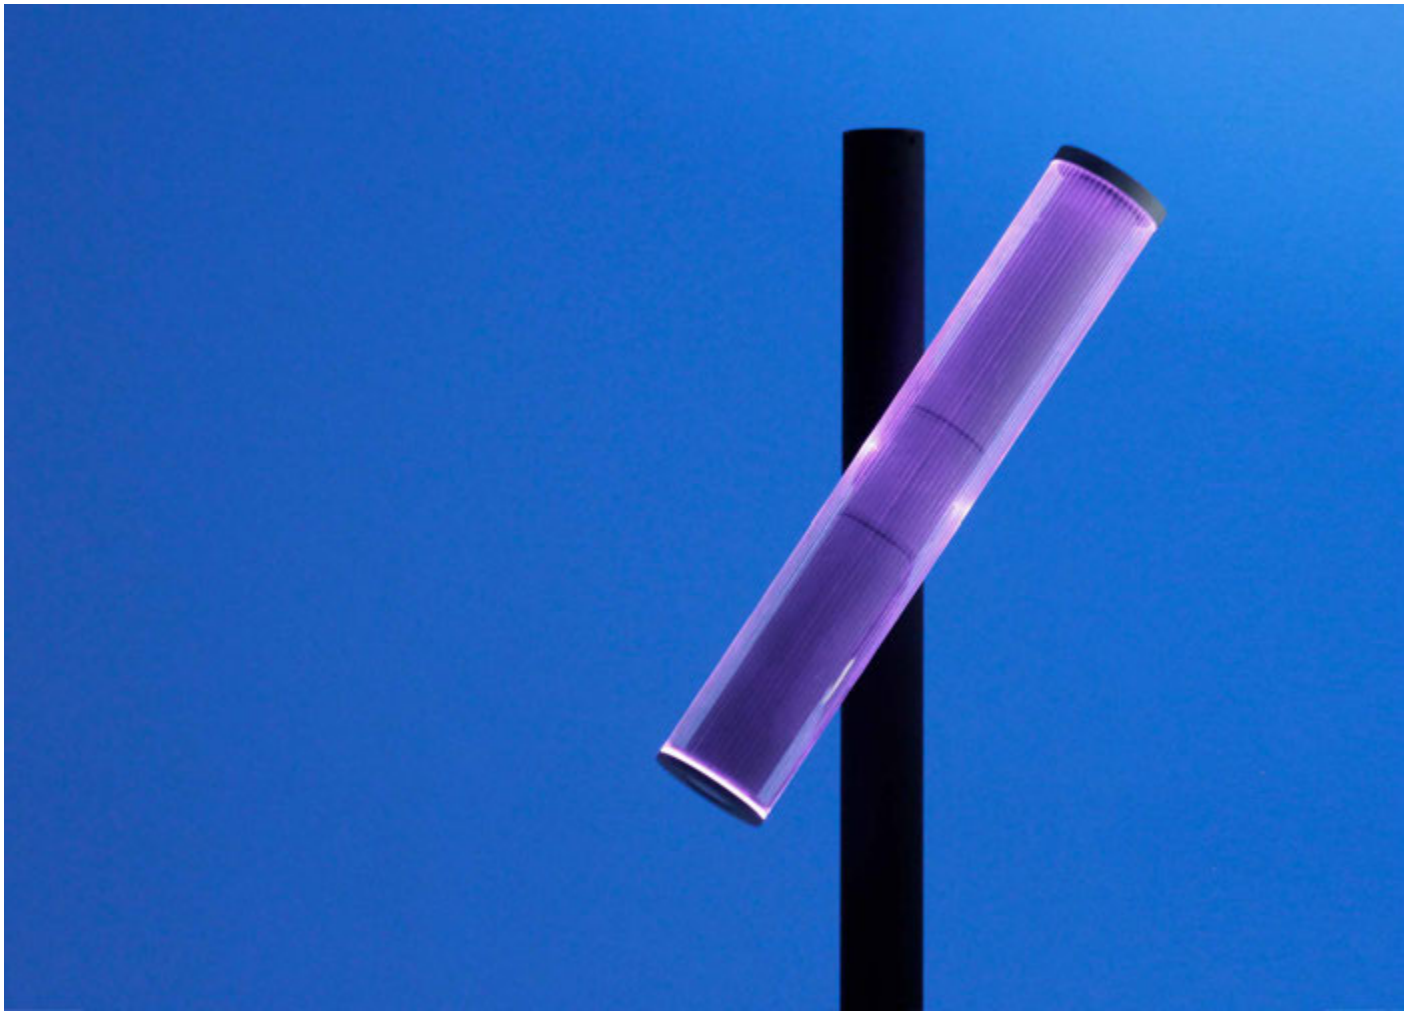




Nebula Compact L

NEBULA COMPACT L

NEW


Design: Skidmore, Owings & Merrill (SOM)

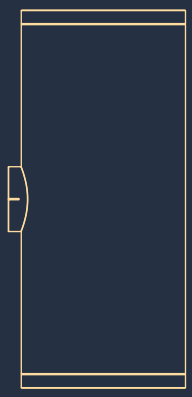

Developed in collaboration with the architecture firm Skidmore, Owings & Merrill, Nebula Compact L is a compact lighting fixture that remains perfectly consistent with the system's design language. Thanks to its full compatibility with Nebula Sistema and Nebula Essential poles, it offers maximum configuration flexibility. This versatile solution expands the system's potential, ensuring a more discreet presence without ever compromising on performance and visual harmony.

NEBULA COMPACT L | LUMINAIRE



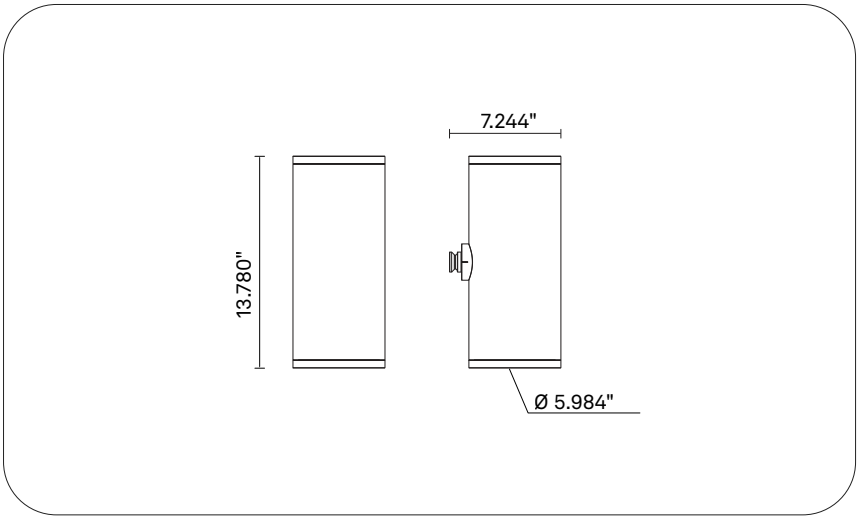

ORDERING INFORMATION / GUIDE

Example: **LUNEBL1-U-D02-827-L025-SP-V0-F49-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D67 Wide Flood	**827** Ra80 2700 K	**L011** 1100 lm	**ST** Transparent	**V0** 120V-277V	**F49** 1-10V	**MU** UL	**CN0** Grey [Neri] Textured
D66 Flood	**830** Ra80 3000 K	**L025** 2500 lm	**SP** Prismatic		**F02** 1-10V+CLO		
D02 T2	**840** Ra80 4000 K	**L035** 3500 lm					
D22 T3 narrow	**XAM** Amber	**L045** 4500 lm					
D10 T4		**L060** 6000 lm					
D30 T5 square medium							
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: D
LED forward current: 343-960 mA
Power rating: 16.4-47.7 W
Nominal Flux: 1100-6000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L80 = 75000 h (Ts = 105 °C, 2200 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 1, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 75° γ = 0, 54°
Luminous flux: 1100-6000 lm
Luminous efficacy: 24-123 lm/W
BUG: B=1-3, U=0, G=0-1
Photobiological safety: RG0 - Exempt risk, RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 20.3-55.8 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 29.528 ft


Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.
Protective screen in extra-clear tempered flat glass, transparent or prismatized, with silicone gaskets and exposed stainless steel or burnished screws.
Central aluminum sheet cover for access to the tilt adjustment compartment.
Equipped with an osmotic valve for internal/external pressure balancing.

Diameter: 5.984 in
Height: 13.78 in
Weight: 9.92 lb
EPA: 2.8 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Fixing via adjustable joint with continuous ±45° regulation and locking by means of two M6 grub screws with stainless steel locknuts.
Tilt-adjustable joint.
Continuous adjustment with no fixed steps.
Secured by four M8 stainless steel set screws with locknuts.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

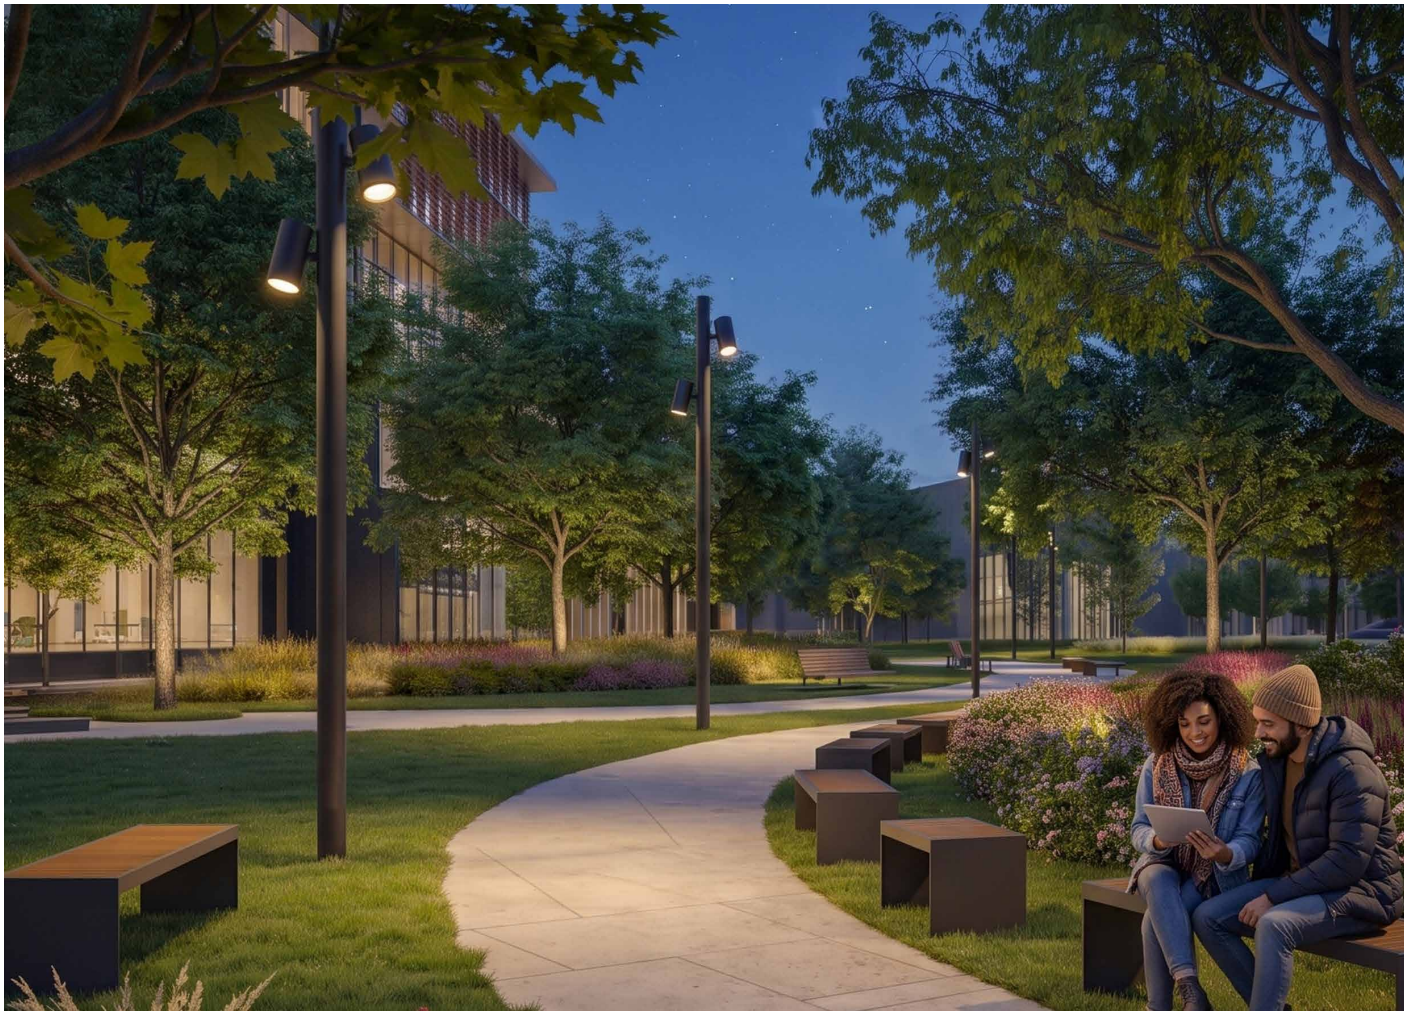




Nebula Compact S 164 NEW

Nebula Compact S

NEBULA COMPACT S

NEW


Design: Skidmore, Owings & Merrill (SOM)

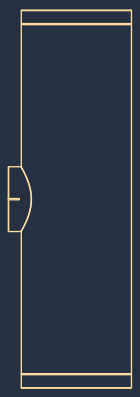

Developed in collaboration with the architecture firm Skidmore, Owings & Merrill, Nebula Compact S is a compact lighting fixture that remains perfectly consistent with the system's design language. Thanks to its full compatibility with Nebula Sistema and Nebula Essential poles, it offers maximum configuration flexibility. This versatile solution expands the system's potential, ensuring a more discreet presence without ever compromising on performance and visual harmony.

NEBULA COMPACT S | LUMINAIRE



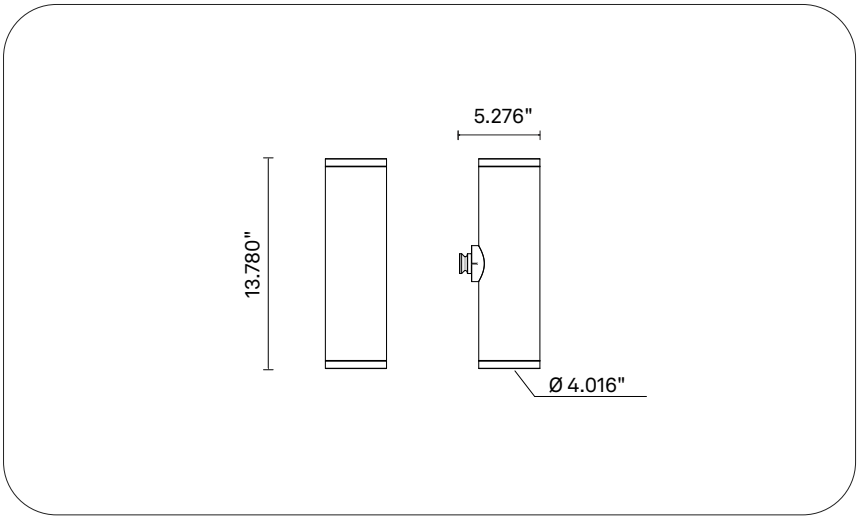

ORDERING INFORMATION / GUIDE

Example: **LUNEBS1-U-D02-827-L015-SP-V0-F49-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D67 Wide Flood	**827** Ra80 2700 K	**L006** 600 lm	**ST** Transparent	**V0** 120V-277V	**F49** 1-10V	**MU** UL	**CN0** Grey [Neri] Textured
D68 Very Wide Flood	**830** Ra80 3000 K	**L015** 1500 lm	**SP** Prismatic		**F02** 1-10V+CLO		
D66 Flood	**840** Ra80 4000 K	**L025** 2500 lm					
D02 T2	**XAM** Amber						
D22 T3 narrow							
D10 T4							
D30 T5 square medium							
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: C
LED forward current: 316-700 mA
Power rating: 10.4-22.5 W
Nominal Flux: 550-2500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 1, 12
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 0, 48°
Luminous flux: 550-2500 lm
Luminous efficacy: 25-117 lm/W
BUG: B=0-2, U=0-1, G=0-1
Photobiological safety: RG0 - Exempt risk, RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 12.8-25.7 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 29.528 ft

Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.
Protective screen in extra-clear tempered flat glass, transparent or prismatized, with silicone gaskets and exposed stainless steel or burnished screws.
Central aluminum sheet cover for access to the tilt adjustment compartment.
Equipped with an osmotic valve for internal/external pressure balancing.

Diameter: 4.016 in
Height: 13.78 in
Weight: 6.61 lb
EPA: 2.26 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Fixing via adjustable joint with continuous ±45° regulation and locking by means of two M6 grub screws with stainless steel locknuts.
Tilt-adjustable joint.
Continuous adjustment with no fixed steps.
Secured by four M8 stainless steel set screws with locknuts.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Pixis Top Street 168 NEW
Pixis Top Projector 170 NEW

Pixis Top

PIXIS TOP

Design: Neri


NEW

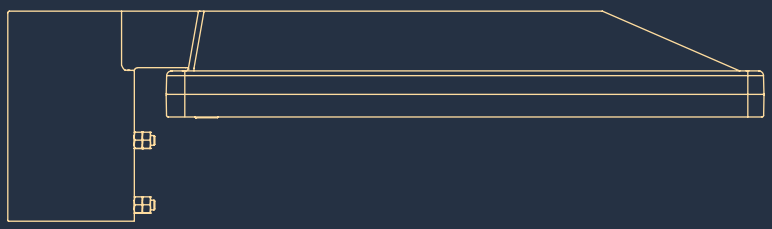

Pixis was created to give shape to urban light. Compact, efficient, and versatile, it guides streets, pathways, and public areas with precise illumination. More than just a lighting fixture, it is a technical instrument that treats light as a responsibility. A tool designed to blend design, spatial quality, and safety, working in harmony with the urban fabric without imposing on the environment.

PIXIS TOP | LUMINAIRE | PIXIS TOP STREET



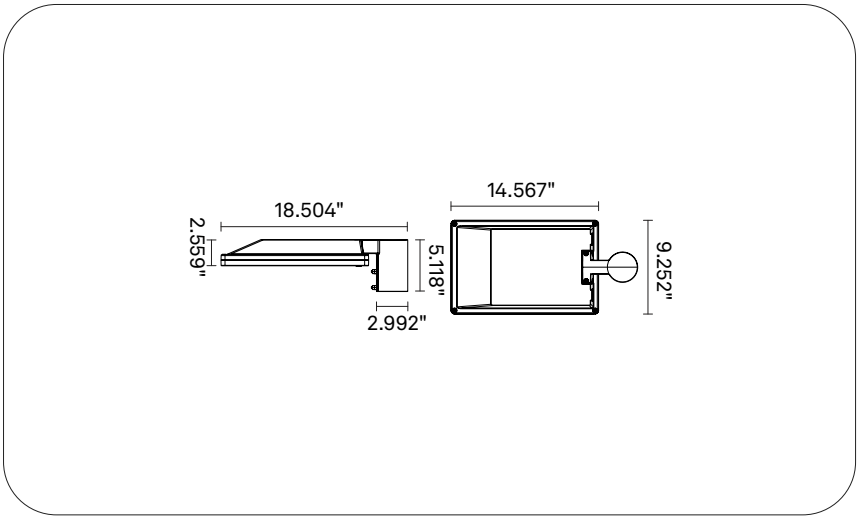

ORDERING INFORMATION / GUIDE

Example: **LUPIX00-U-D24-830-L075-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D25 T2 narrow	**827** Ra80 2700 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D37 T3 medium	**830** Ra80 3000 K	**L025** 2500 lm			**F51** DT8+CLO		
D59 T3 medium + BLC	**840** Ra80 4000 K	**L035** 3500 lm					
D24 T4 wide	**8T2** Ra80 TW 2200-4000 K	**L040** 4000 lm					
D58 T4 wide + BLC		**L045** 4500 lm					
D18 Type V - B		**L060** 6000 lm					
		L075 7500 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 320-980 mA
Power rating: 13.8-67.3 W
Nominal Flux: 1500-7500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, TW 2200-4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 20, 55° γ = 44, 65°
Luminous flux: 1500-7500 lm
Luminous efficacy: 66-138 lm/W
BUG: B=0-2, U=0, G=0-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 16.7-76.8 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Driver included: Yes

Surge protection: 10kV CM - 6kV DM, 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with a base and body made of die-cast aluminum (UNI EN 1706) and a lower frame openable for access to the auxiliary compartment.
Protective shield in extra-clear tempered glass with IK10 impact resistance (EN 62262) and diffusing plastic adhesive film (code 9565.620.267).
Integrated heat sink in die-cast aluminum, internal black reflector in PC, silicone seal between lower frame and upper cover, and compartment prepared for additional surge protectors or remote monitoring systems.
Stainless steel screws.

Length: 18.504 in
Width: 9.252 in
Height: 5.118 in
Weight: 12.13 lb
EPA: 0.43 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Pole-top mounting on Ø 2-3/8″ tubes, with Ø 3″ outside diameter.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PIXIS TOP | LUMINAIRE | PIXIS TOP PROJECTOR



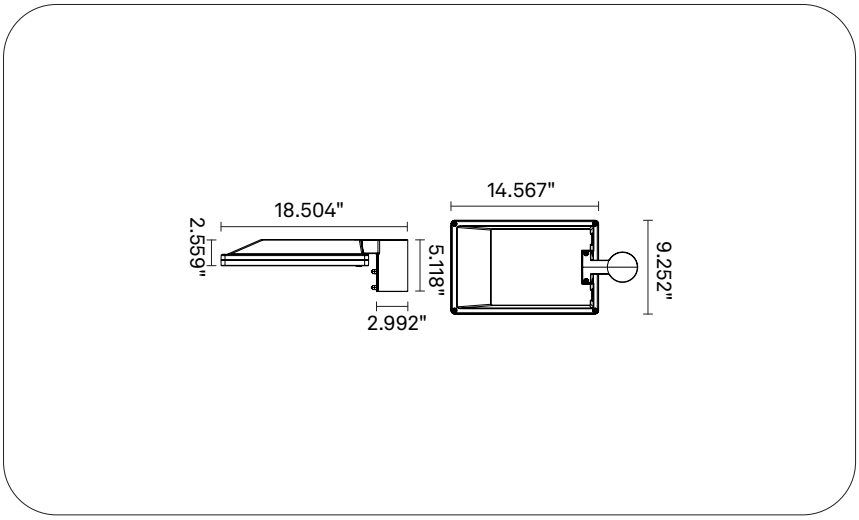

ORDERING INFORMATION / GUIDE

Example: **LUPIX10-U-D61-827-L040-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D61 Spot	**827** Ra80 2700 K	**L040** 4000 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D63 Medium Wide Flood	**830** Ra80 3000 K	**L050** 5000 lm			**F51** DT8+CLO		
D64 Wide Flood	**840** Ra80 4000 K	**L070** 7000 lm					
D62 Flood	**8T2** Ra80 TW 2200-4000 K						

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
High-power LED matrix.

Energy-efficiency class: E
LED forward current: 701-994 mA
Power rating: 31.7-64.8 W
Nominal Flux: 4000-7000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, TW 2200-4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3, ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff C = 0° γ = 0, 1°
Luminous flux: 4000-7000 lm
Luminous efficacy: 93-108 lm/W
BUG: B=3-4, U=0-1, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 37.2-74.1 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Driver included: Yes

Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure with a base and body made of die-cast aluminum (UNI EN 1706) and a lower frame openable for access to the auxiliary compartment.
Protective shield in extra-clear tempered glass with IK10 impact resistance (EN 62262) and diffusing plastic adhesive film (code 9565.620.267).
Integrated heat sink in die-cast aluminum, internal black reflector in PC, silicone seal between lower frame and upper cover, and compartment prepared for additional surge protectors or remote monitoring systems.
Stainless steel screws.

Length: 18.504 in
Width: 9.252 in
Height: 5.118 in
Weight: 12.13 lb
EPA: 0.43 ft²
Protection degree: IP66
Mechanical resistance: IK10

INSTALLATION
Pole-top mounting on Ø 2-3/8" tubes, with Ø 3" outside diameter.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Pixis Lateral Street 174 NEW
Pixis Lateral Projector 176 NEW

Pixis Lateral

PIXIS LATERAL

NEW


Design: Neri

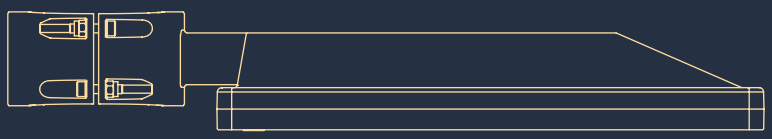

Pixis was created to give shape to urban light. Compact, efficient, and versatile, it guides streets, pathways, and public areas with precise illumination. More than just a lighting fixture, it is a technical instrument that treats light as a responsibility. A tool designed to blend design, spatial quality, and safety, working in harmony with the urban fabric without imposing on the environment.

PIXIS LATERAL | LUMINAIRE | PIXIS LATERAL STREET



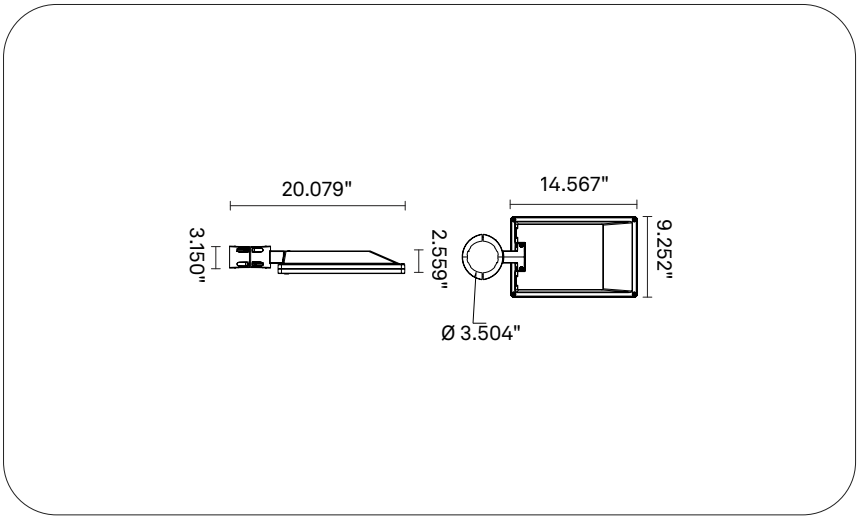

ORDERING INFORMATION / GUIDE

Example: **LUPIX01-U-D25-827-L025-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D25 T2 narrow	**827** Ra80 2700 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D37 T3 medium	**830** Ra80 3000 K	**L025** 2500 lm			**F51** DT8+CLO		
D59 T3 medium + BLC	**840** Ra80 4000 K	**L035** 3500 lm					
D24 T4 wide	**8T2** Ra80 TW 2200-4000 K	**L040** 4000 lm					
D58 T4 wide + BLC		**L045** 4500 lm					
D18 Type V - B		**L060** 6000 lm					
		L075 7500 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 320-980 mA
Power rating: 13.8-67.3 W
Nominal Flux: 1500-7500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, TW 2200-4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 20, 55° γ = 44, 65°
Luminous flux: 1500-7500 lm
Luminous efficacy: 66-138 lm/W
BUG: B=0-2, U=0, G=0-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 16.7-76.8 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Driver included: Yes

Surge protection: 10kV CM - 6kV DM, 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with a base and body made of die-cast aluminum (UNI EN 1706) and a lower frame openable for access to the auxiliary compartment.
Protective shield in extra-clear tempered glass with IK10 impact resistance (EN 62262) and diffusing plastic adhesive film (code 9565.620.267).
Integrated heat sink in die-cast aluminum, internal black reflector in PC, silicone seal between lower frame and upper cover, and compartment prepared for additional surge protectors or remote monitoring systems.
Stainless steel screws.

Length: 20.079 in
Width: 9.252 in
Height: 3.15 in
Weight: 12.13 lb
EPA: 0.43 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Suitable for side mounting on Ø 3-1/2" tubes.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PIXIS LATERAL | LUMINAIRE | PIXIS LATERAL PROJECTOR



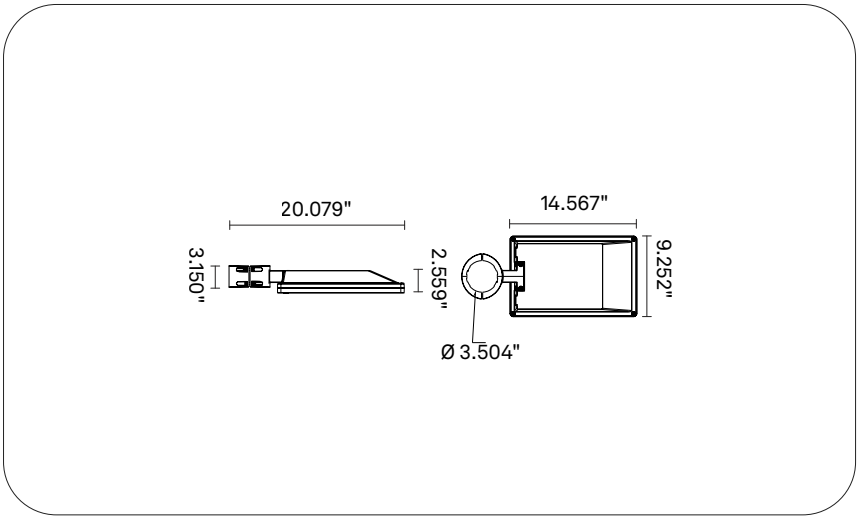

ORDERING INFORMATION / GUIDE

Example: **LUPIX11-U-D61-827-L040-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D61 Spot	**827** Ra80 2700 K	**L040** 4000 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D63 Medium Wide Flood	**830** Ra80 3000 K	**L050** 5000 lm			**F51** DT8+CLO		
D64 Wide Flood	**840** Ra80 4000 K	**L070** 7000 lm					
D62 Flood	**8T2** Ra80 TW 2200-4000 K						

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: E
LED forward current: 701-994 mA
Power rating: 31.7-64.8 W
Nominal Flux: 4000-7000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, TW 2200-4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3, ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff C = 0° γ = 0, 1°
Luminous flux: 4000-7000 lm
Luminous efficacy: 93-108 lm/W
BUG: B=3-4, U=0-1, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 37.2-74.1 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Driver included: Yes

Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure with a base and body made of die-cast aluminum (UNI EN 1706) and a lower frame openable for access to the auxiliary compartment.
Protective shield in extra-clear tempered glass with IK10 impact resistance (EN 62262) and diffusing plastic adhesive film (code 9565.620.267).
Integrated heat sink in die-cast aluminum, internal black reflector in PC, silicone seal between lower frame and upper cover, and compartment prepared for additional surge protectors or remote monitoring systems.
Stainless steel screws.

Length: 20.079 in
Width: 9.252 in
Height: 3.15 in
Weight: 12.13 lb
EPA: 0.43 ft²
Protection degree: IP66
Mechanical resistance: IK10

INSTALLATION
Suitable for side mounting on Ø 3-1/2" tubes.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Pixis Surface Street 180 NEW
Pixis Surface Projector 182 NEW

Pixis Surface

PIXIS SURFACE

Design: Neri


NEW

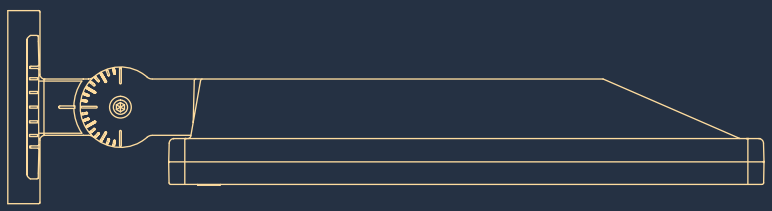

Pixis is an essential lighting fixture, a precise instrument designed to enhance architectural space. Pure lines and balanced proportions enable Pixis to integrate seamlessly into both contemporary and historical contexts without altering their aesthetic character.

PIXIS SURFACE | LUMINAIRE | PIXIS SURFACE STREET



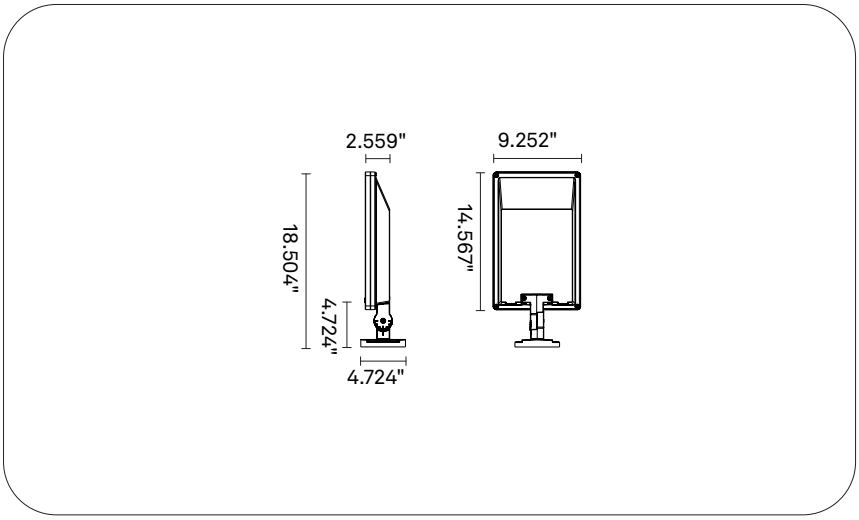

ORDERING INFORMATION / GUIDE

Example: **LUPIX02-U-D25-827-L025-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D25 T2 narrow	**827** Ra80 2700 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D37 T3 medium	**830** Ra80 3000 K	**L025** 2500 lm			**F51** DT8+CLO		
D59 T3 medium + BLC	**840** Ra80 4000 K	**L035** 3500 lm					
D24 T4 wide	**8T2** Ra80 TW 2200-4000 K	**L040** 4000 lm					
D58 T4 wide + BLC		**L045** 4500 lm					
D18 Type V - B		**L060** 6000 lm					
		L075 7500 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 320-980 mA
Power rating: 13.8-67.3 W
Nominal Flux: 1500-7500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, TW 2200-4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff, Semi Cutoff C = 20, 55° γ = 44, 65°
Luminous flux: 1500-7500 lm
Luminous efficacy: 66-138 lm/W
BUG: B=0-2, U=0, G=0-2
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 16.7-76.8 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Driver included: Yes

Surge protection: 10kV CM - 6kV DM, 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with a base and body made of die-cast aluminum (UNI EN 1706) and a lower frame openable for access to the auxiliary compartment.
Protective shield in extra-clear tempered glass with IK10 impact resistance (EN 62262) and diffusing plastic adhesive film (code 9565.620.267).
Integrated heat sink in die-cast aluminum, internal black reflector in PC, silicone seal between lower frame and upper cover, and compartment prepared for additional surge protectors or remote monitoring systems.
Stainless steel screws.

Length: 18.504 in
Width: 9.252 in
Height: 4.724 in
Weight: 11.02 lb
EPA: 0.32 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Suitable for mounting on a flat surface with anchors.
Adjustable ±90° with 10° steps.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PIXIS SURFACE | LUMINAIRE | PIXIS SURFACE PROJECTOR



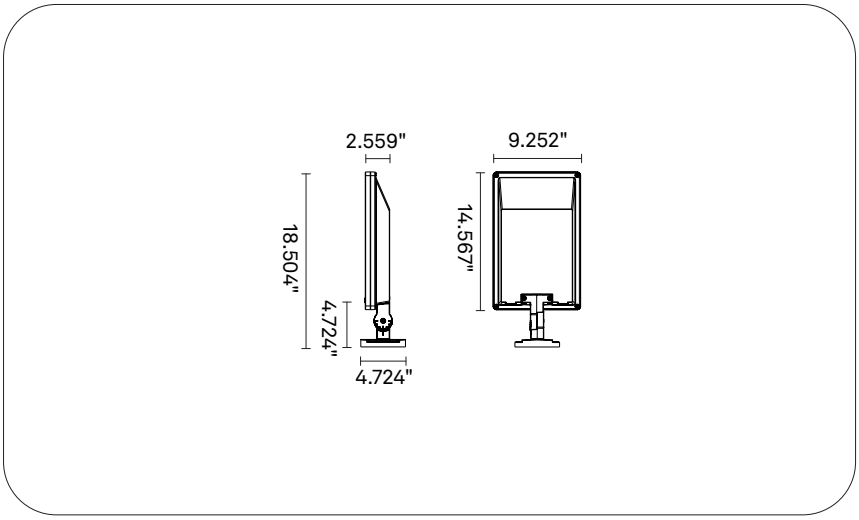

ORDERING INFORMATION / GUIDE

Example: **LUPIX12-U-D61-827-L040-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D61 Spot	**827** Ra80 2700 K	**L040** 4000 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D63 Medium Wide Flood	**830** Ra80 3000 K	**L050** 5000 lm			**F51** DT8+CLO		
D64 Wide Flood	**840** Ra80 4000 K	**L070** 7000 lm					
D62 Flood	**8T2** Ra80 TW 2200-4000 K						

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
High-power LED matrix.

Energy-efficiency class: E
LED forward current: 701-994 mA
Power rating: 31.7-64.8 W
Nominal Flux: 4000-7000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, TW 2200-4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3, ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24
Cutoff Angle: Cutoff C = 0° γ = 0, 1°
Luminous flux: 4000-7000 lm
Luminous efficacy: 93-108 lm/W
BUG: B=3-4, U=0-1, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 37.2-74.1 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Driver included: Yes
Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure with a base and body made of die-cast aluminum (UNI EN 1706) and a lower frame openable for access to the auxiliary compartment.
Protective shield in extra-clear tempered glass with IK10 impact resistance (EN 62262) and diffusing plastic adhesive film (code 9565.620.267).
Integrated heat sink in die-cast aluminum, internal black reflector in PC, silicone seal between lower frame and upper cover, and compartment prepared for additional surge protectors or remote monitoring systems.
Stainless steel screws.

Length: 18.504 in
Width: 9.252 in
Height: 4.724 in
Weight: 11.02 lb
EPA: 0.32 ft²
Protection degree: IP66
Mechanical resistance: IK10

INSTALLATION
Suitable for mounting on a flat surface with anchors.
Adjustable ±90° with 10° steps.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Nova

NOVA


Design: Neri

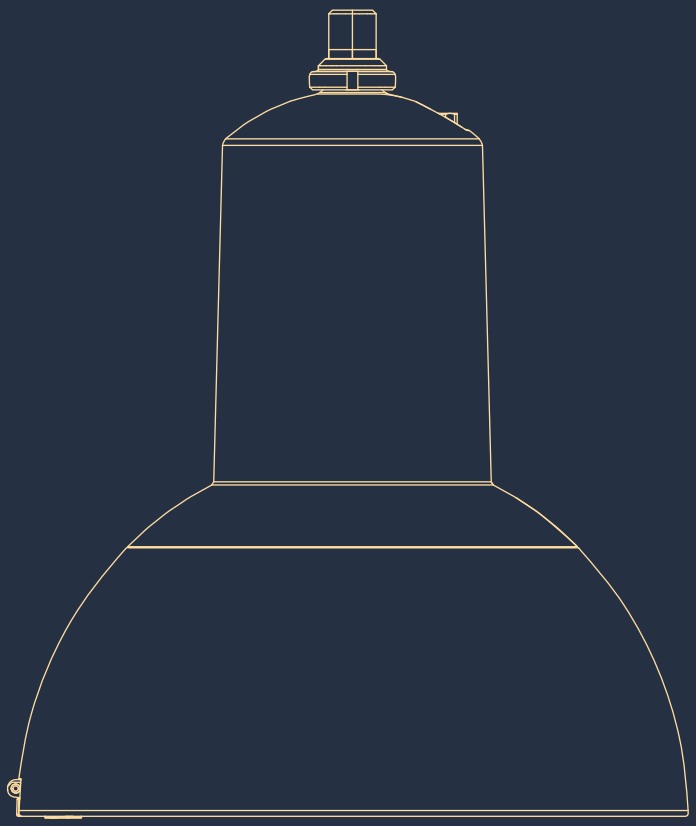

Timeless and familiar design, versatile and robust, low power consumption and reduced glare are the main characteristics of Nova.

NOVA | LUMINAIRE | NOVA



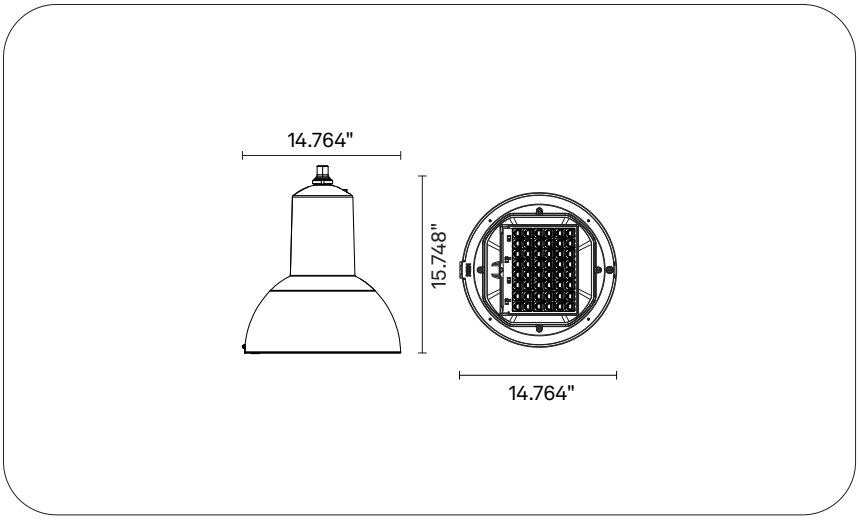

ORDERING INFORMATION / GUIDE

Example: **LUNOV00-U-D30-830-L035-SP-V0-F35-MU-CN1**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**827** Ra80 2700 K	**L025** 2500 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN1** Grey [Neri] Textured + White [RAL 9010] Matt
D36 T2 medium	**830** Ra80 3000 K	**L035** 3500 lm					
D22 T3 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D25 T2 narrow		**L060** 6000 lm					
D37 T3 medium		**L075** 7500 lm					
D24 T4 wide		**L090** 9000 lm					
D38 T4 medium		**L105** 10500 lm					
D30 T5 square medium		**L120** 12000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Milano, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 330-822 mA
Power rating: 14.3-76.6 W
Nominal Flux: 2500-12000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Semi Cutoff C = 5, 55° γ = 46, 54°
Luminous flux: 2500-12000 lm
Luminous efficacy: 123-146 lm/W
BUG: B=1-3, U=0, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 17.3-86.7 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -31 °F / +104 °F
Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with a bell-shaped upper frame equipped with a G3/4" threaded mounting tube and a skirted lower frame openable via hinge for access to the auxiliary and optical compartment.
Protective shield in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector.
Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote monitoring systems.

Diameter: 14.764 in
Height: 15.748 in
Weight: 23.15 lb
EPA: 0.43 ft²
Protection degree: IP66
Mechanical resistance: IK10

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.





Nova M 190 UPDATE Quick Ship Program


Nova M

NOVA M

Design: Neri

UPDATE


Quick Ship Program

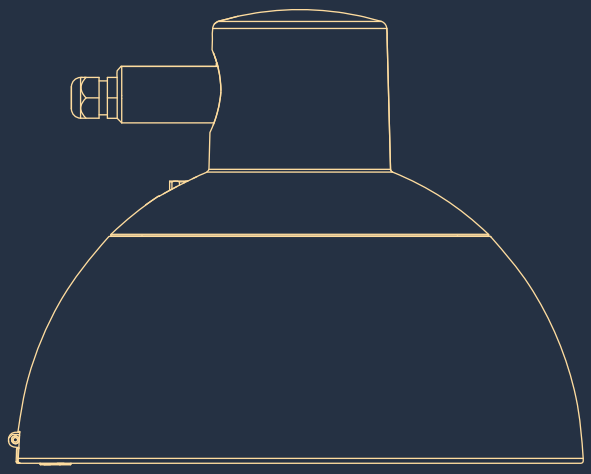

Timeless and familiar design, versatile and robust, low power consumption and reduced glare are the main characteristics of Nova M.

NOVA M | LUMINAIRE | NOVA M



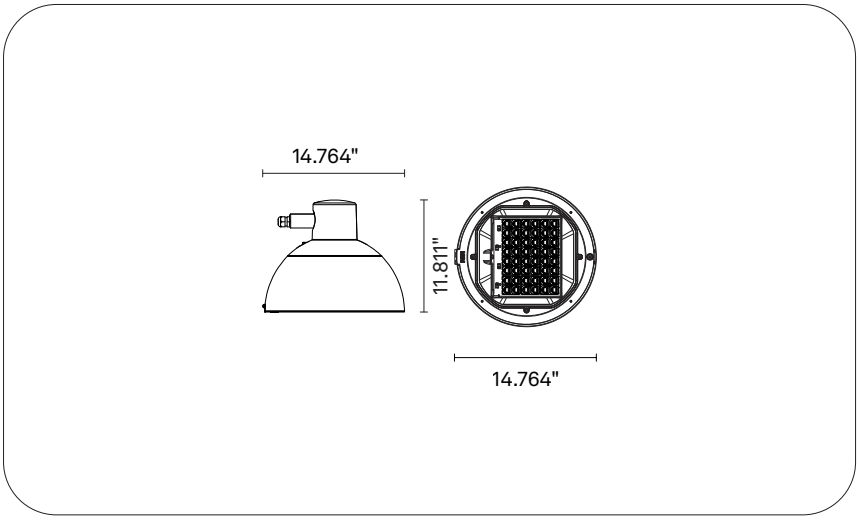

ORDERING INFORMATION / GUIDE

Example: **LUNOVM0-U-D22-830-L075-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**827** Ra80 2700 K	**L025** 2500 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D46 AFR/SPORT N	**830** Ra80 3000 K	**L033** 3300 lm		**V3** 347V-480V			
D36 T2 medium	**840** Ra80 4000 K	**L035** 3500 lm					
D47 AFR/SPORT W	**XAM** Amber	**L045** 4500 lm					
D48 T2 wide		**L060** 6000 lm					
D22 T3 narrow		**L075** 7500 lm					
D25 T2 narrow		**L090** 9000 lm					
D37 T3 medium		**L105** 10500 lm					
D24 T4 wide		**L120** 12000 lm					
D38 T4 medium							
D30 T5 square medium							
D49 T5 Round							
D51 Left corner							
D23 Right corner							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Matera, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: , D, E
LED forward current: 330-822 mA
Power rating: 14.3-83 W
Nominal Flux: 2500-12000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 160° γ = 31, 69°
Luminous flux: 2500-12000 lm
Luminous efficacy: 35-146 lm/W
BUG: B=1-3, U=0, G=0-3

ELECTRICAL CHARACTERISTICS
Luminaire power: 17.3-93.5 W
Voltage: 120V-277V~ 50/60Hz, 347V-480V~ 50/60Hz
Power factor: ≥0.99

Surge protection: 20kV CM - 20kV DM


MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with a cylindrical upper frame for housing the internal component and a lower frame openable via hinge for access to the auxiliary and optical compartment.
Protective shield in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector.
Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote monitoring systems.

Diameter: 14.764 in
Height: 11.811 in
Weight: 23.15 lb
EPA: 0.32 ft²

INSTALLATION
Suitable for side mounting only on Nova system tips.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.




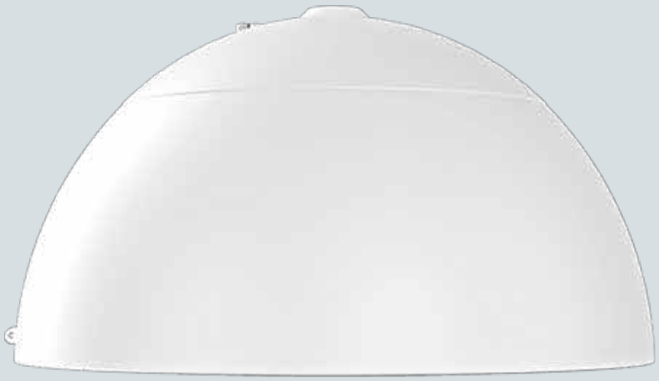

Nova S


NOVA S


Design: Neri

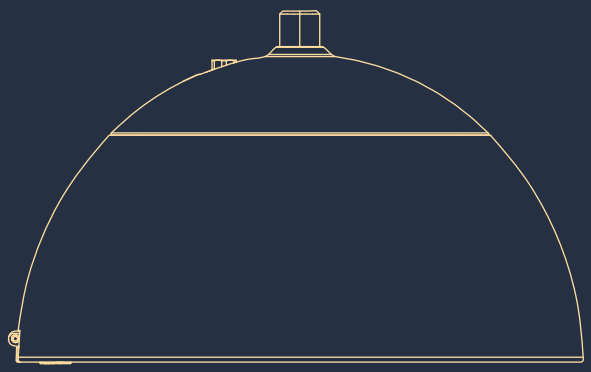

Timeless and familiar design, versatility, low power consumption and reduced glare make Nova S the best response to the most stringent standards in efficient urban lighting.

NOVA S | LUMINAIRE | NOVA S

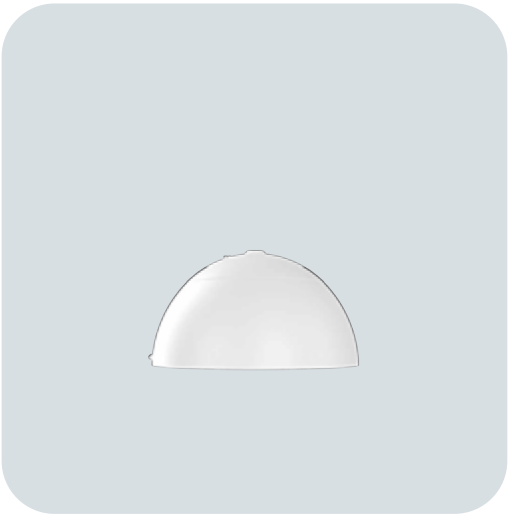

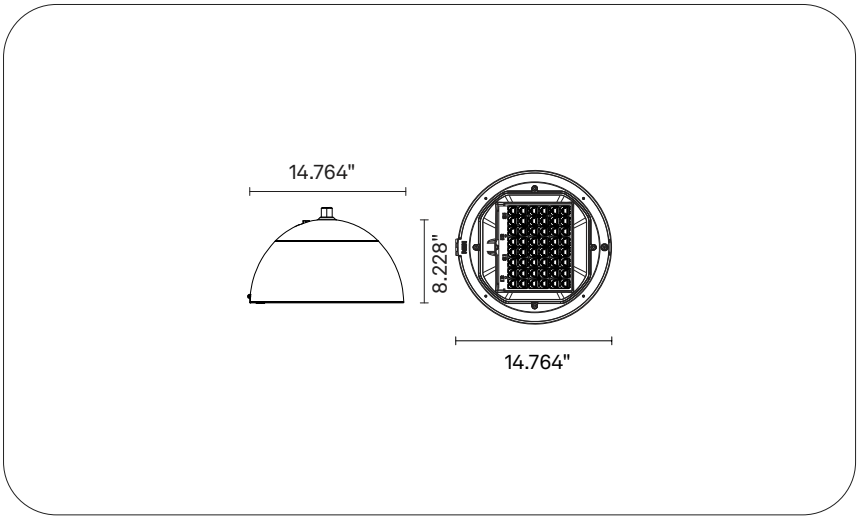

ORDERING INFORMATION / GUIDE

Example: **LUNOVS0-U-D28-830-L025-SP-V0-F35-MU-CW0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**827** Ra80 2700 K	**L025** 2500 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CW0** White [RAL 9010] Matt
D36 T2 medium	**830** Ra80 3000 K	**L035** 3500 lm					
D22 T3 narrow	**840** Ra80 4000 K	**L045** 4500 lm					
D25 T2 narrow		**L060** 6000 lm					
D37 T3 medium		**L075** 7500 lm					
D24 T4 wide		**L090** 9000 lm					
D38 T4 medium		**L105** 10500 lm					
D30 T5 square medium		**L120** 12000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Lanciano, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 330-822 mA
Power rating: 14.3-76.6 W
Nominal Flux: 2500-12000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Semi Cutoff C = 5, 55° γ = 46, 54°
Luminous flux: 2500-12000 lm
Luminous efficacy: 123-146 lm/W
BUG: B=1-3, U=0, G=1-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 17.3-86.7 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -31 °F / +104 °F
Driver included: Yes
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with a bell-shaped upper frame equipped with a G3/4" threaded mounting tube and a skirted lower frame openable via hinge for access to the auxiliary and optical compartment.
Protective shield in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector.
Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote monitoring systems.

Diameter: 14.764 in
Height: 8.228 in
Weight: 23.15 lb
EPA: 0.32 ft²
Protection degree: IP66
Mechanical resistance: IK10

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Polis Lateral


POLIS LATERAL


Design: Neri

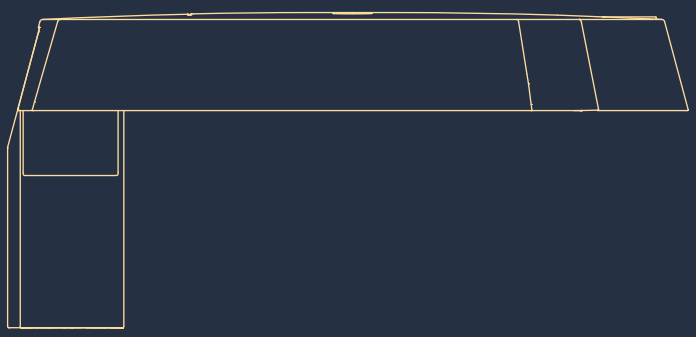

A product designed to illuminate residential areas, parks, squares and city centres efficiently and discreetly. Polis is the result of a design process aimed at achieving a perfect balance between aesthetics and performance. Timeless shapes and quality construction are combined with innovative lighting solutions developed for use in street and urban contexts.

POLIS LATERAL | LUMINAIRE | POLIS LATERAL

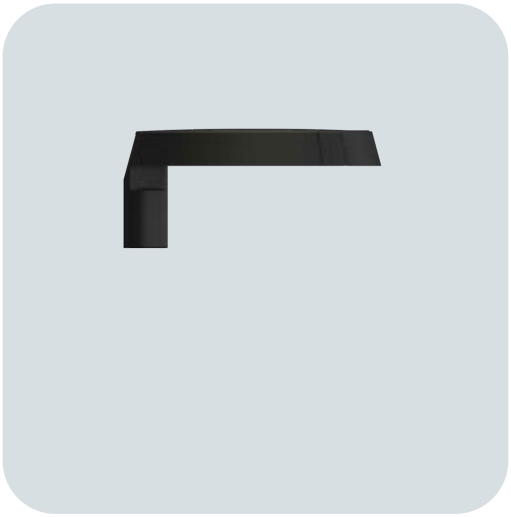

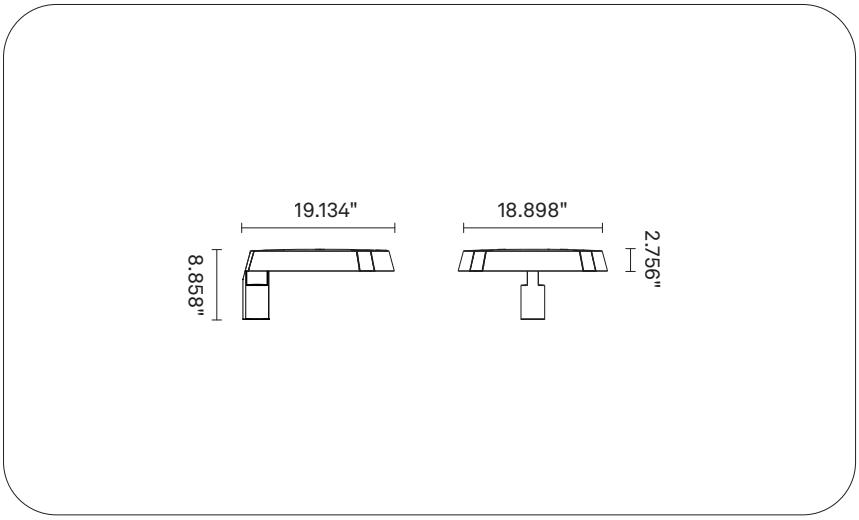

ORDERING INFORMATION / GUIDE

Example: **LUPOL01-U-D36-727-L090-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**722** Ra70 2200 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**727** Ra70 2700 K	**L025** 2500 lm			**F11** NEMA-3		
D22 T3 narrow	**730** Ra70 3000 K	**L032** 3200 lm			**F12** NEMA-7		
D25 T2 narrow	**740** Ra70 4000 K	**L035** 3500 lm					
D37 T3 medium	**XAM** Amber	**L045** 4500 lm					
D24 T4 wide		**L060** 6000 lm					
D38 T4 medium		**L075** 7500 lm					
D30 T5 square medium		**L090** 9000 lm					
		L105 10500 lm					
		L120 12000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D, E
LED forward current: 182-852 mA
Power rating: 7.7-83 W
Nominal Flux: 1500-12000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 56, 68°
Luminous flux: 1500-12000 lm
Luminous efficacy: 34-158 lm/W
BUG: B=0-3, U=0, G=0-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 9.7-93.5 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Cable type: 5GAWG18 SJTW
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with a main body and integrated heat sink.
Protective shield in extra-clear screen-printed tempered glass with IK09 impact resistance (EN 62262) and white internal reflector in polycarbonate.
EPDM seal between glass and upper cover, with stainless steel screws.
Body supported by steel sheet.

Length: 19.134 in
Width: 18.898 in
Height: 8.858 in
Weight: 19.4 lb
EPA: 0.22 ft²
Protection degree: IP66
Mechanical resistance: IK09

INSTALLATION
Side and pole-top mounting on Ø 2-3/8″ tubes, with Ø 3″ outside diameter.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Polis Catenary


POLIS CATENARY

Design: Neri

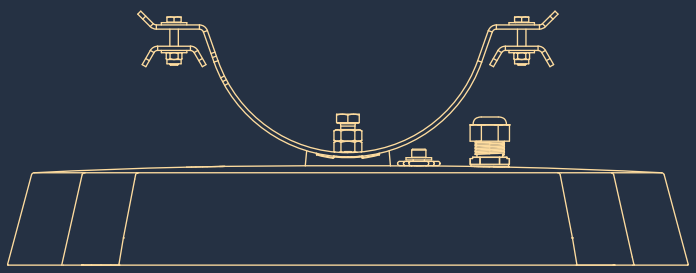

A product designed to illuminate residential areas, parks, squares and city centres efficiently and discreetly. Polis is the result of a design process aimed at achieving a perfect balance between aesthetics and performance. Timeless shapes and quality construction are combined with innovative lighting solutions developed for use in street and urban contexts.



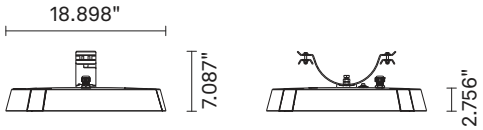

ORDERING INFORMATION / GUIDE

Example: **LUPOL03-U-D30-730-L035-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**722** Ra70 2200 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**727** Ra70 2700 K	**L025** 2500 lm			**F11** NEMA-3		
D22 T3 narrow	**730** Ra70 3000 K	**L032** 3200 lm			**F12** NEMA-7		
D25 T2 narrow	**740** Ra70 4000 K	**L035** 3500 lm					
D37 T3 medium	**XAM** Amber	**L045** 4500 lm					
D24 T4 wide		**L060** 6000 lm					
D38 T4 medium		**L075** 7500 lm					
D30 T5 square medium		**L090** 9000 lm					
		L105 10500 lm					
		L120 12000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Location: Pistoia, Italia
Photographer: Antonio Neri

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D, E
LED forward current: 182-852 mA
Power rating: 7.7-83 W
Nominal Flux: 1500-12000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 56, 68°
Luminous flux: 1500-12000 lm
Luminous efficacy: 34-158 lm/W
BUG: B=0-3, U=0, G=0-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 9.7-93.5 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Cable type: 5GAWG18 SJTW
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with a main body in cast aluminum and an integrated heat sink.
Protective shield in extra-clear screen-printed tempered glass with IK09 impact resistance (EN 62262) and white internal reflector in polycarbonate.
EPDM seal between glass and upper cover, support with curved flat frame, and ±15° tilting system for vertical adjustment.
Stainless steel safety cable Ø 0.12 in, stainless steel fasteners, and top cable entry (max Ø 0.47 in).

Diameter: 18.898 in
Height: 7.087 in
Weight: 23.15 lb
EPA: 0.22 ft²
Protection degree: IP66
Mechanical resistance: IK09

INSTALLATION
Tensioned support for steel cables with maximum diameter Ø 1/2".
Tilting attachment adjustable ±15°.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Polis Suspended


POLIS SUSPENDED


Design: Neri

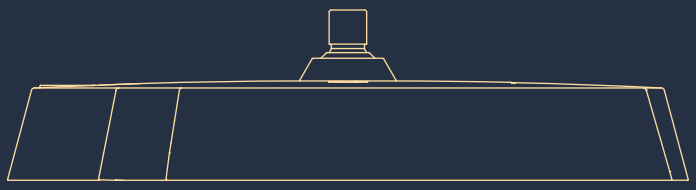

A product designed to illuminate residential areas, parks, squares and city centres efficiently and discreetly. Polis is the result of a design process aimed at achieving a perfect balance between aesthetics and performance. Timeless shapes and quality construction are combined with innovative lighting solutions developed for use in street and urban contexts.

POLIS SUSPENDED | LUMINAIRE | POLIS SUSPENDED

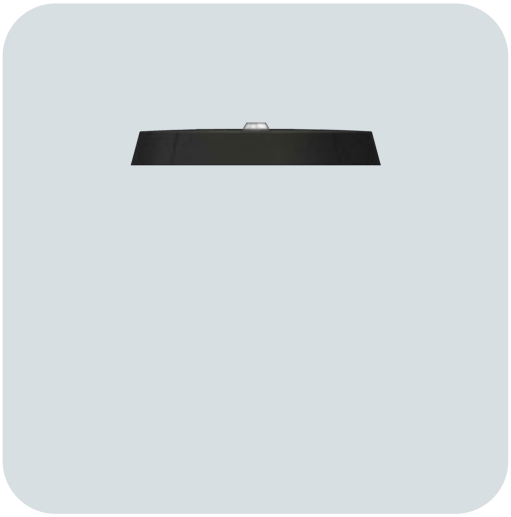

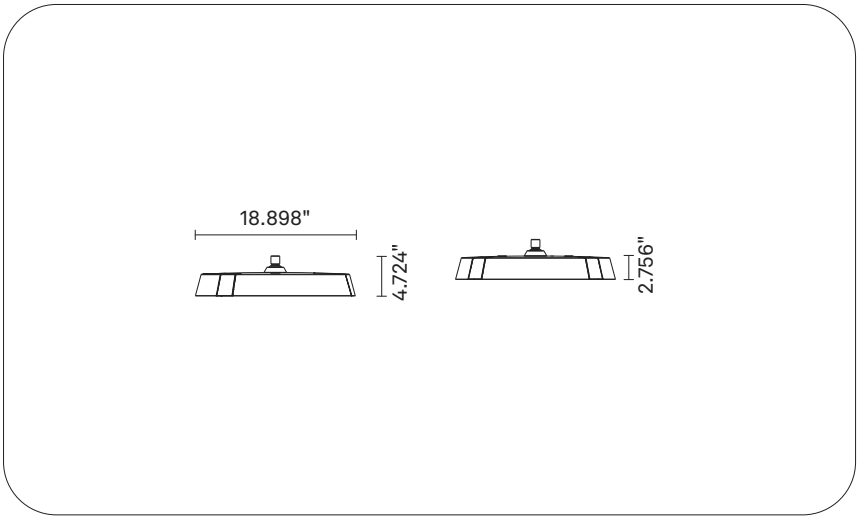

ORDERING INFORMATION / GUIDE

Example: **LUPOL02-U-D36-730-L120-ST-V0-F11-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**722** Ra70 2200 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**727** Ra70 2700 K	**L025** 2500 lm			**F11** NEMA-3		
D22 T3 narrow	**730** Ra70 3000 K	**L032** 3200 lm			**F12** NEMA-7		
D25 T2 narrow	**740** Ra70 4000 K	**L035** 3500 lm					
D37 T3 medium	**XAM** Amber	**L045** 4500 lm					
D24 T4 wide		**L060** 6000 lm					
D38 T4 medium		**L075** 7500 lm					
D30 T5 square medium		**L090** 9000 lm					
		L105 10500 lm					
		L120 12000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D, E
LED forward current: 182-852 mA
Power rating: 7.7-83 W
Nominal Flux: 1500-12000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 56, 68°
Luminous flux: 1500-12000 lm
Luminous efficacy: 34-158 lm/W
BUG: B=0-3, U=0, G=0-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 9.7-93.5 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -40 °F / +122 °F
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of die-cast aluminum (UNI EN 1706) with a main body and integrated heat sink.
Protective shield in extra-clear screen-printed tempered glass with IK09 impact resistance (EN 62262) and white internal reflector in polycarbonate.
EPDM seal between glass and upper cover, supported by steel sheet and stainless steel screws.

Diameter: 18.898 in
Height: 4.724 in
Weight: 23.15 lb
EPA: 0.22 ft²
Protection degree: IP66
Mechanical resistance: IK09

INSTALLATION
Suspended: threaded connection G3/4".

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.





Polis Top

POLIS TOP


Design: Neri



A product designed to illuminate residential areas, parks, squares and city centres efficiently and discreetly. Polis is the result of a design process aimed at achieving a perfect balance between aesthetics and performance. Timeless shapes and quality construction are combined with innovative lighting solutions developed for use in street and urban contexts.

POLIS TOP | LUMINAIRE | POLIS TOP



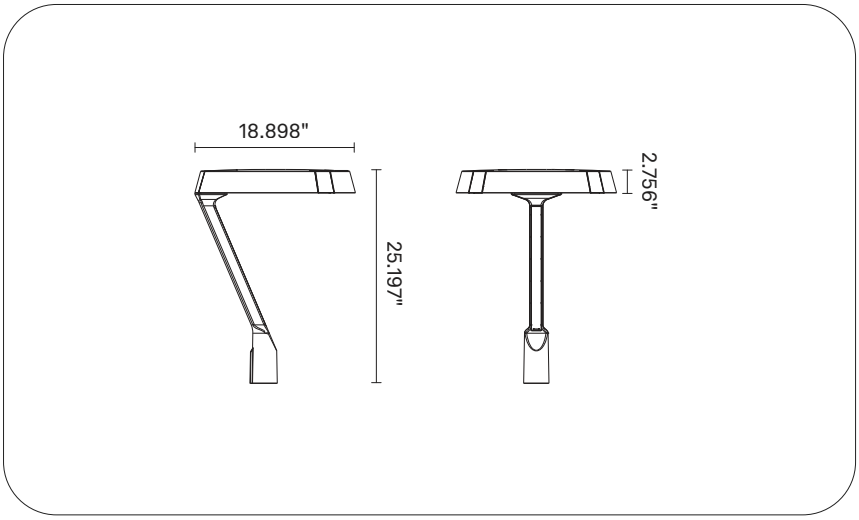

ORDERING INFORMATION / GUIDE

Example: **LUPOL00-U-D28-722-L025-ST-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D28 T1 short	**722** Ra70 2200 K	**L015** 1500 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D36 T2 medium	**727** Ra70 2700 K	**L025** 2500 lm			**F11** NEMA-3		
D22 T3 narrow	**730** Ra70 3000 K	**L032** 3200 lm			**F12** NEMA-7		
D25 T2 narrow	**740** Ra70 4000 K	**L035** 3500 lm					
D37 T3 medium	**XAM** Amber	**L045** 4500 lm					
D24 T4 wide		**L060** 6000 lm					
D38 T4 medium		**L075** 7500 lm					
D30 T5 square medium		**L090** 9000 lm					
		L105 10500 lm					
		L120 12000 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: , C, D, E
LED forward current: 182-852 mA
Power rating: 7.7-83 W
Nominal Flux: 1500-12000 lm
Nominal CCT (Color temperature): 2200 K, 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 70
Standard Deviation Colour Matching: ≤5
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 85-100% ULOR = 0%
LED quantity: 16, 24, 32, 48
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 56, 68°
Luminous flux: 1276-12000 lm
Luminous efficacy: 29-158 lm/W
BUG: B=0-3, U=1, G=0-3
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 9.7-93.5 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99

Ambient temperature: -40 °F / +122 °F
Cable type: 5GAWG18 SJTW
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with an upper cap and fork made of die-cast aluminum (UNI EN 1706) and an integrated heat sink.
Protective shield in extra-clear screen-printed tempered glass with IK09 impact resistance (EN 62262) and white internal reflector in polycarbonate.
EPDM seal between glass and upper cover, supported by steel sheet and stainless steel screws.

Diameter: 18.898 in
Height: 25.197 in
Weight: 20.94 lb
EPA: 0.32 ft²
Protection degree: IP66
Mechanical resistance: IK09

INSTALLATION
Pole-top mounting on Ø 2-3/8" tubes, with Ø 3" outside diameter.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.





1 light source | H 40”	214
2 light sources | H 40”	216
1 light source | H 108”	218
2 light sources | H 108”	220

Nebula Bollard

NEBULA BOLLARD


Design: Skidmore, Owings & Merrill (SOM)



The Nebula lighting bollard is part of a larger urban lighting collection designed in collaboration with the American architecture firm Skidmore, Owings & Merrill (SOM). Available in two heights, it can be fitted with one or two luminaire heads.

NEBULA BOLLARD | LUMINAIRE | 1 LIGHT SOURCE | H 40”



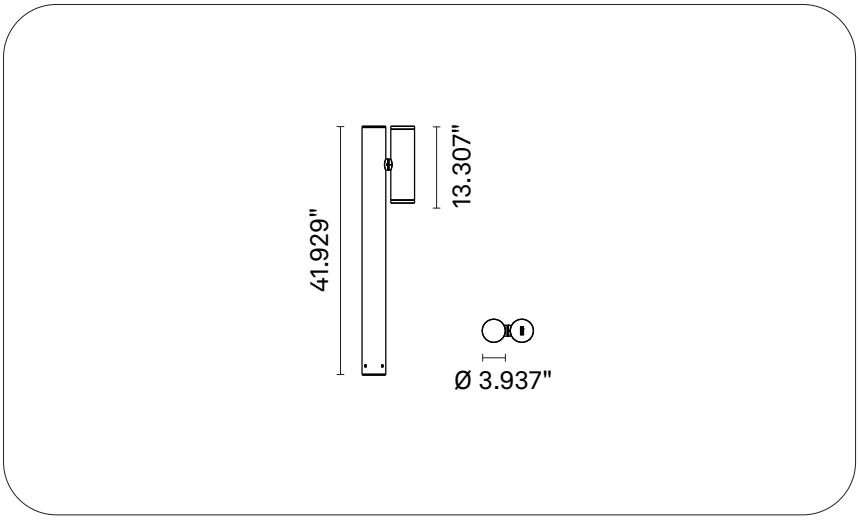

ORDERING INFORMATION / GUIDE

Example: **BONEB01-U-D02-827-L010-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D02 T2	**827** Ra80 2700 K	**L006** 600 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D22 T3 narrow	**830** Ra80 3000 K	**L010** 1000 lm					
D10 T4	**840** Ra80 4000 K	**L015** 1500 lm					
D30 T5 square medium	**XAM** Amber						
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: , C
LED forward current: 219-700 mA
Power rating: 7.1-19.3 W
Nominal Flux: 550-1500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 1
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 32, 48°
Luminous flux: 550-1500 lm
Luminous efficacy: 25-112 lm/W
BUG: B=0-1, U=0-1, G=0
Photobiological safety: RG1 - Low risk


ELECTRICAL CHARACTERISTICS
Luminaire power: 9-22.3 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 4.921 ft
Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Extruded aluminum and aluminum sheet structure with integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered flat glass, available in transparent or prismatized finishes.
Fixing via adjustable joint with stepped tilt adjustment (0° / ±30° / ±45°) or continuous adjustment within ±45°, locked by two stainless steel M6 grub screws.
Exposed screws in stainless steel or with a burnished finish to ensure high corrosion resistance.


Height: 41.929 in
Section: Base/Top 3.937/3.937 in
Weight: 20.28 lb
EPA: 0.75 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Fixing via two stainless steel M6 grub screws.
Possibility of free adjustment (±45°) without intermediate steps.
Joint with tilt adjustment (0° / ±30° / ±45° steps).

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

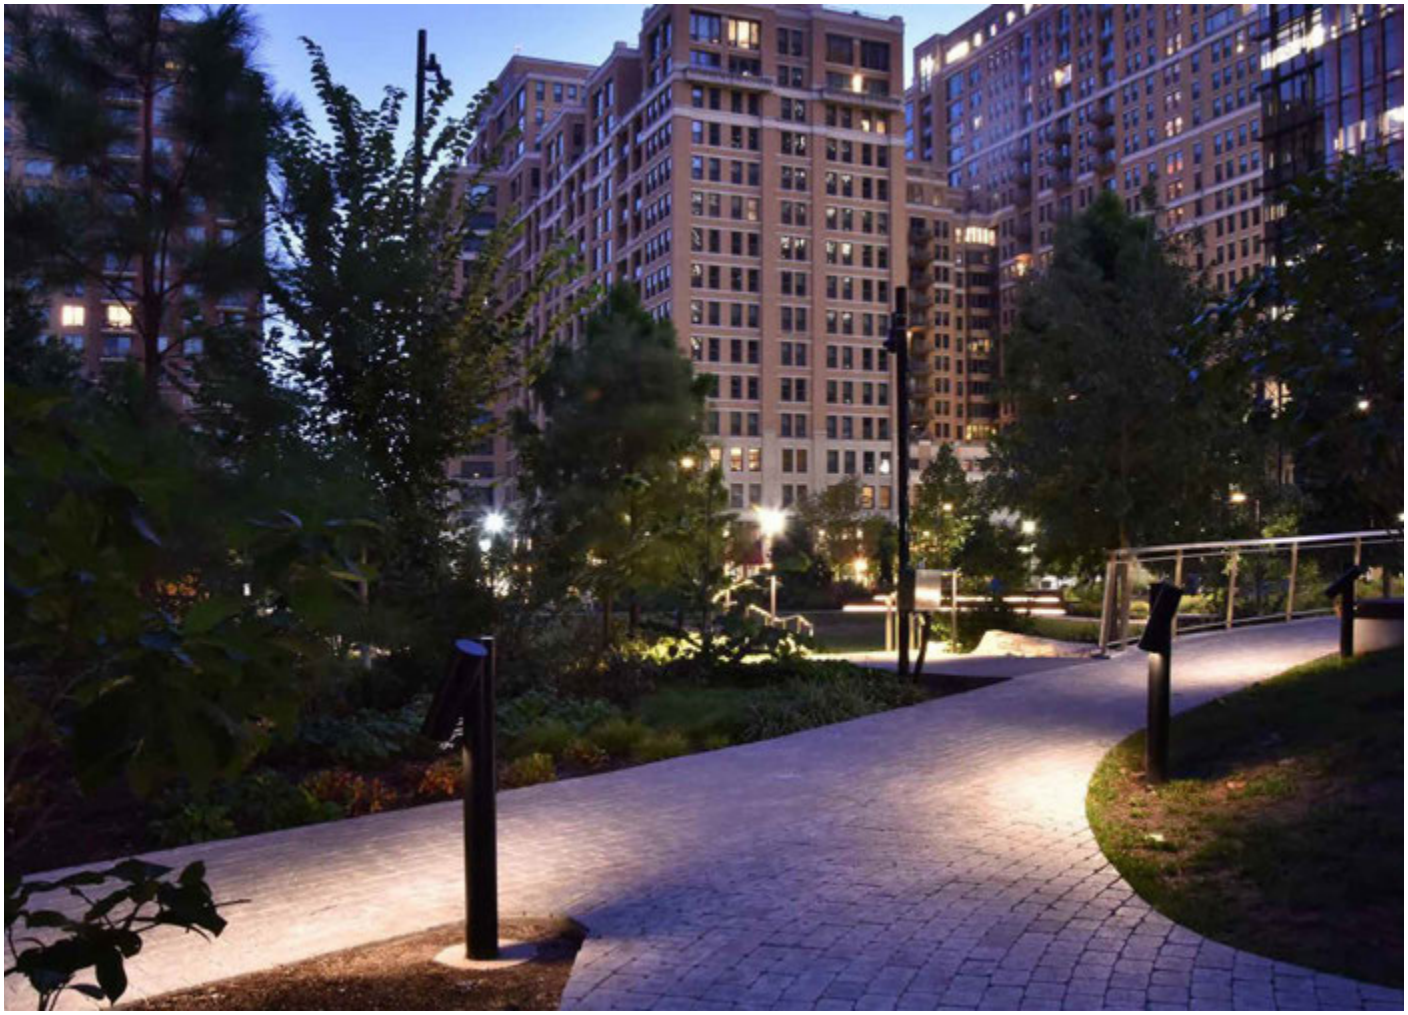

NEBULA BOLLARD | LUMINAIRE | 2 LIGHT SOURCES | H 40”

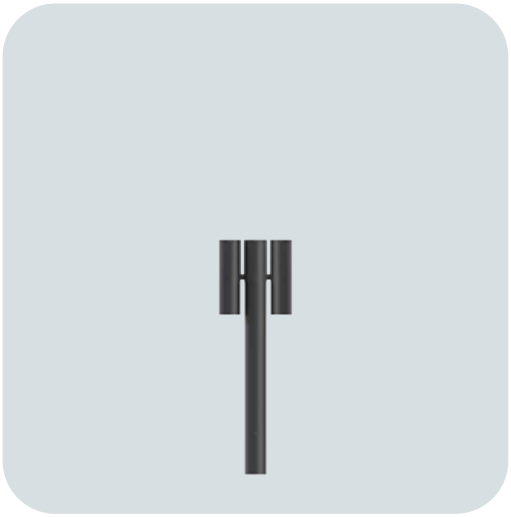

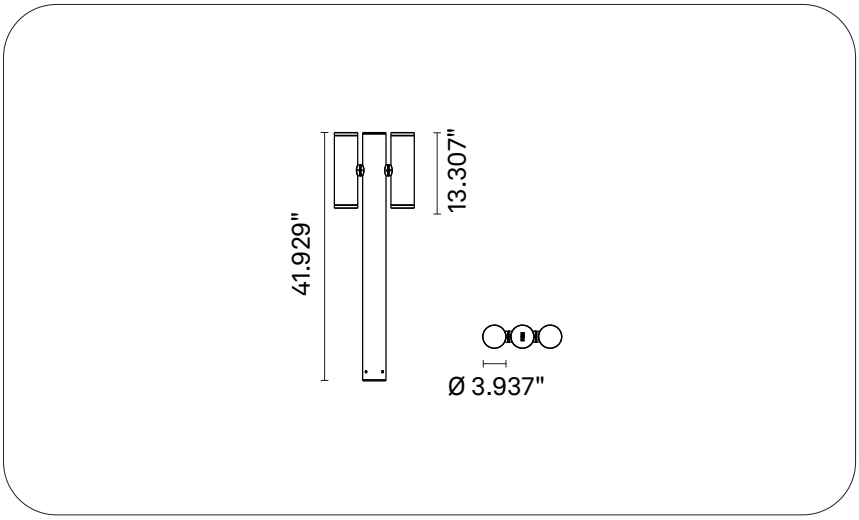

ORDERING INFORMATION / GUIDE

Example: **BONEB02-U-D65-830-L030-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D02 T2	**827** Ra80 2700 K	**L011** 1100 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D22 T3 narrow	**830** Ra80 3000 K	**L020** 2000 lm					
D10 T4	**840** Ra80 4000 K	**L030** 3000 lm					
D30 T5 square medium	**XAM** Amber						
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: , C
LED forward current: 219-700 mA
Power rating: 7.1-19.3 W
Nominal Flux: 1100-3000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 2-7%
LED quantity: 2
Cutoff Angle: Cutoff C = 0, 90° γ = 26, 59°
Luminous flux: 1100-3000 lm
Luminous efficacy: 25-112 lm/W
BUG: B=1, U=2-3, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 18-44.7 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 4.921 ft
Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Extruded aluminum and aluminum sheet structure with integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered flat glass, available in transparent or prismatized finishes.
Fixing via adjustable joint with stepped tilt adjustment (0° / ±30° / ±45°) or continuous adjustment within ±45°, locked by two stainless steel M6 grub screws.
Exposed screws in stainless steel or with a burnished finish to ensure high corrosion resistance.

Height: 41.929 in
Section: Base/Top 3.937/3.937 in
Weight: 28.44 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Fixing via two stainless steel M6 grub screws.
Possibility of free adjustment (±45°) without intermediate steps.
Joint with tilt adjustment (0° / ±30° / ±45° steps).

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



NEBULA BOLLARD | LUMINAIRE | 1 LIGHT SOURCE | H 108”



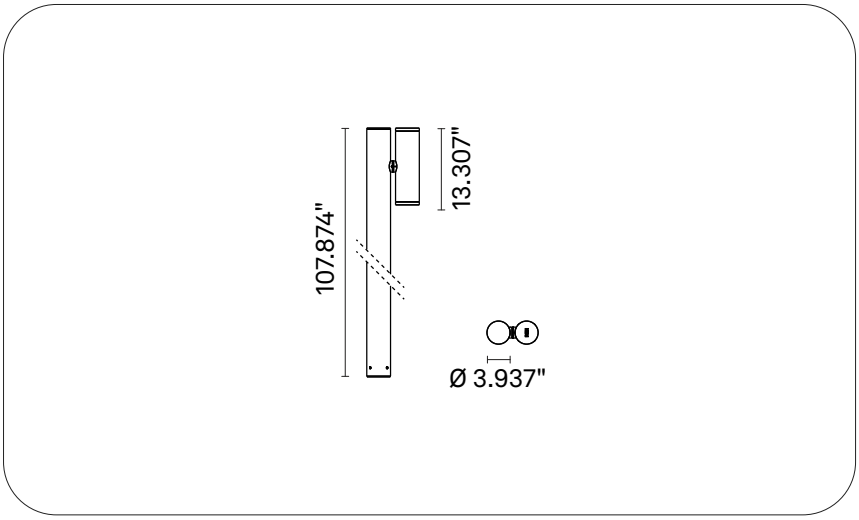

ORDERING INFORMATION / GUIDE

Example: **BONEB03-U-D02-827-L010-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D67 Wide Flood	**827** Ra80 2700 K	**L006** 600 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D68 Very Wide Flood	**830** Ra80 3000 K	**L010** 1000 lm	**SP** Prismatic				
D66 Flood	**840** Ra80 4000 K	**L015** 1500 lm					
D02 T2	**XAM** Amber	**L025** 2500 lm					
D22 T3 narrow							
D10 T4							
D30 T5 square medium							
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: , C
LED forward current: 219-700 mA
Power rating: 7.1-20.9 W
Nominal Flux: 550-2500 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 1
Cutoff Angle: Cutoff, Semi Cutoff C = 0, 55° γ = 0, 48°
Luminous flux: 550-2500 lm
Luminous efficacy: 25-117 lm/W
BUG: B=0-2, U=0-1, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 9-24 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 11.483 ft
Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Extruded aluminum and aluminum sheet structure with integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered flat glass, available in transparent or prismatized finishes.
Fixing via adjustable joint with stepped tilt adjustment (0° / ±30° / ±45°) or continuous adjustment within ±45°, locked by two stainless steel M6 grub screws.
Exposed screws in stainless steel or with a burnished finish to ensure high corrosion resistance.


Height: 107.874 in
Section: Base/Top 3.937/3.937 in
Weight: 35.94 lb
EPA: 1.61 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Fixing via two stainless steel M6 grub screws.
Possibility of free adjustment (±45°) without intermediate steps.
Joint with tilt adjustment (0° / ±30° / ±45° steps).

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



NEBULA BOLLARD | LUMINAIRE | 2 LIGHT SOURCES | H 108”

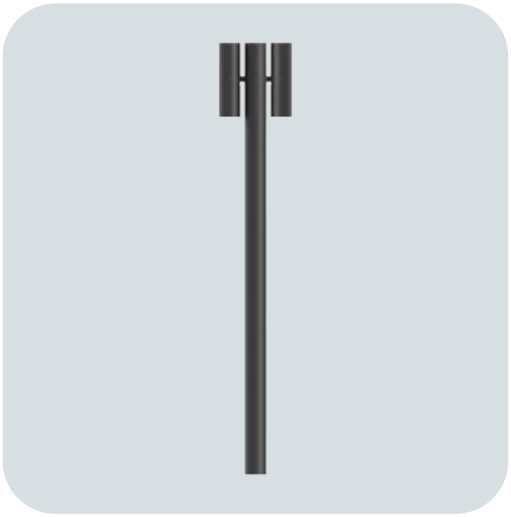

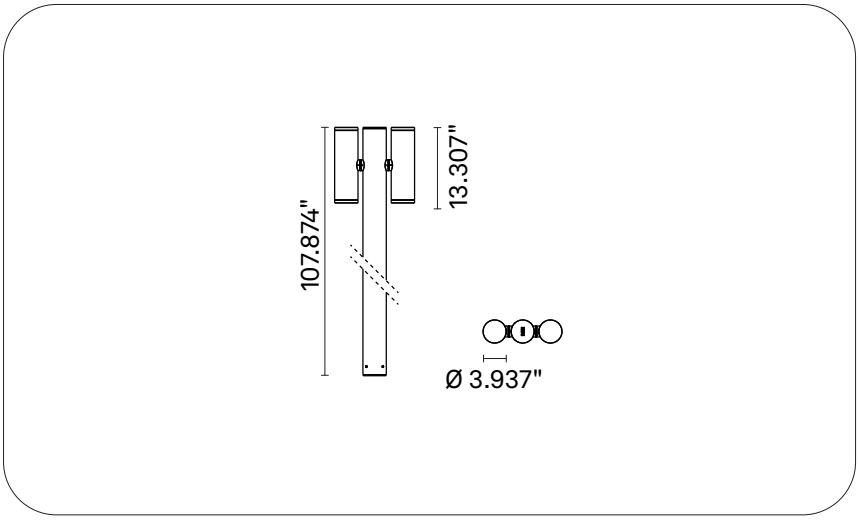

ORDERING INFORMATION / GUIDE

Example: **BONEB04-U-D65-830-L030-SP-V0-F35-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D02 T2	**827** Ra80 2700 K	**L011** 1100 lm	**SP** Prismatic	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D22 T3 narrow	**830** Ra80 3000 K	**L020** 2000 lm					
D10 T4	**840** Ra80 4000 K	**L030** 3000 lm					
D30 T5 square medium	**XAM** Amber						
D65 T5 round							

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: , C
LED forward current: 219-700 mA
Power rating: 7.1-19.3 W
Nominal Flux: 1100-3000 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA),
L80 = 60000 h (Ts = 105 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 2-7%
LED quantity: 2
Cutoff Angle: Cutoff C = 0, 90° γ = 26, 59°
Luminous flux: 1100-3000 lm
Luminous efficacy: 25-112 lm/W
BUG: B=1, U=2-3, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 18-44.7 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Cable length: 11.483 ft
Surge protection: 10kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Extruded aluminum and aluminum sheet structure with integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered flat glass, available in transparent or prismatized finishes.
Fixing via adjustable joint with stepped tilt adjustment (0° / ±30° / ±45°) or continuous adjustment within ±45°, locked by two stainless steel M6 grub screws.
Exposed screws in stainless steel or with a burnished finish to ensure high corrosion resistance.

Height: 107.874 in
Section: Base/Top 3.937/3.937 in
Weight: 44.09 lb
EPA: 1.83 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Fixing via two stainless steel M6 grub screws.
Possibility of free adjustment (±45°) without intermediate steps.
Joint with tilt adjustment (0° / ±30° / ±45° steps).

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






1 light 224
2 lights 226

Nebula Pathlight


NEBULA PATHLIGHT


Design: Skidmore, Owings & Merrill (SOM)

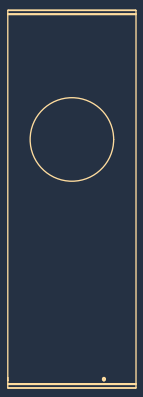

The Nebula step light is part of a larger urban lighting collection designed in collaboration with the American architecture firm Skidmore, Owings & Merrill (SOM). The collection includes a lighting system, step light, and two types of lighting bollards.

NEBULA PATHLIGHT | LUMINAIRE | 1 LIGHT

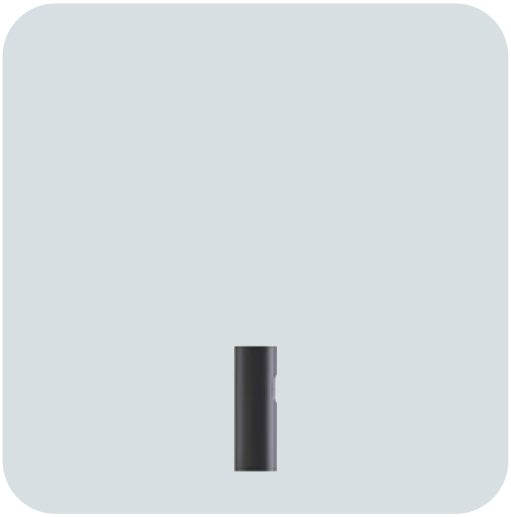

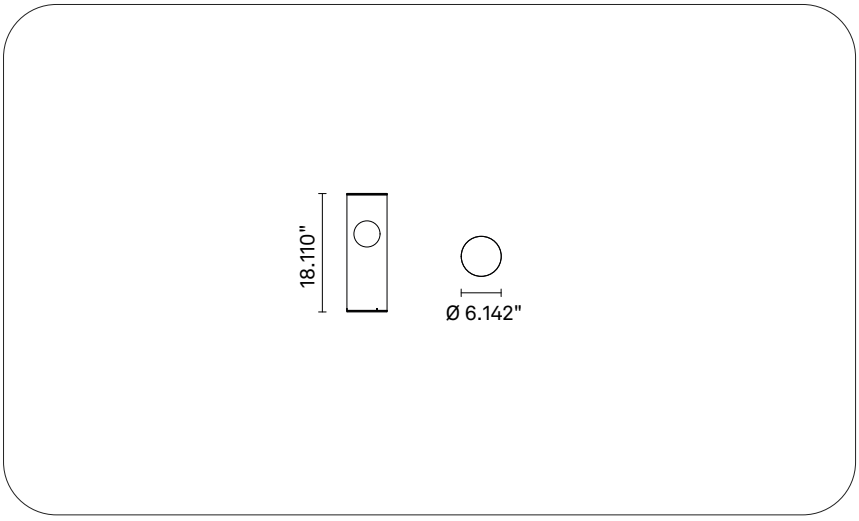

ORDERING INFORMATION / GUIDE

Example: **PLNEB01-U-D00-830-L005-SS-V0-F02-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D00 Diffuse	**830** Ra80 3000 K	**L002** 200 lm	**SS** Smoky grey	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
	8CW Ra80 RGBW	**L005** 500 lm			**F30** DMX		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: C
LED forward current: 269-700 mA
Power rating: 10 W
Nominal Flux: 175-500 lm
Nominal CCT (Color temperature): 3000 K, RGBW
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3, ≤5
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA), L90 = 90000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 50%
LED quantity: 1, 3
Cutoff Angle: Non Cutoff C = 90° γ = 90°
Luminous flux: 175-500 lm
Luminous efficacy: 15-42 lm/W
BUG: B=0, U=3, G=1
Photobiological safety: RG1 - Low risk


ELECTRICAL CHARACTERISTICS
Luminaire power: 12 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.9
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 3GAWG18, 5GAWG18 SJTW
Surge protection: 10kV CM - 6kV DM, 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.
Polycarbonate protective screen and osmotic valve for internal/external pressure balancing.
Stainless steel or burnished screws.


Diameter: 6.142 in
Height: 18.11 in
Weight: 11.02 lb
EPA: 0.75 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Ground installation with 3 1/2” hole spacing (Ø 3/8” holes) and securing of the tube to the base via three M4 set screws.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

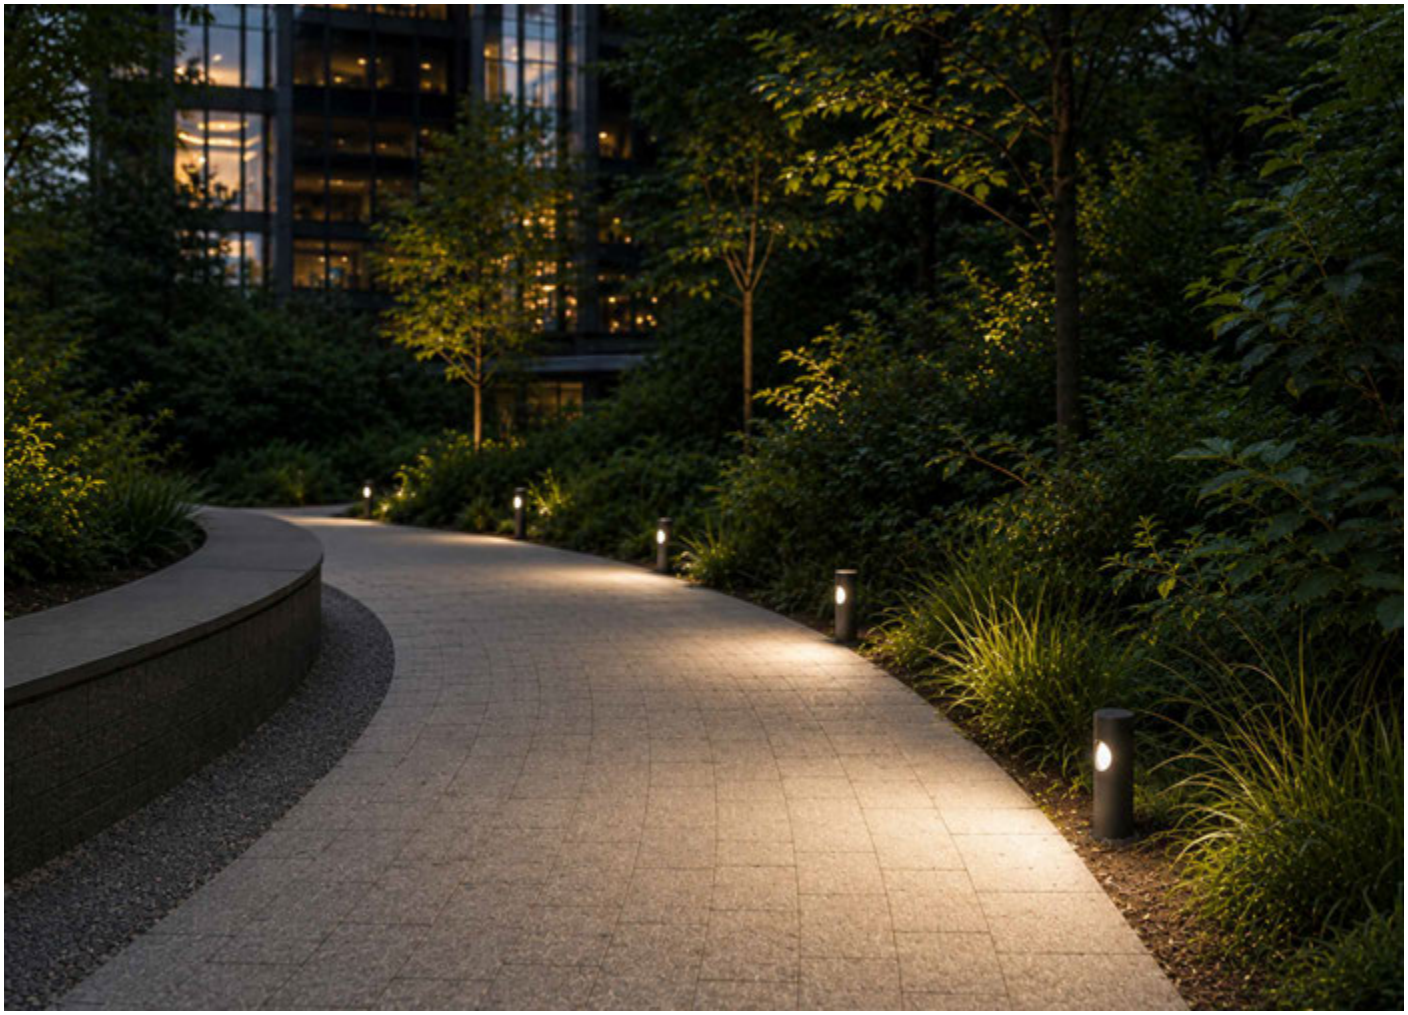

NEBULA PATHLIGHT | LUMINAIRE | 2 LIGHTS

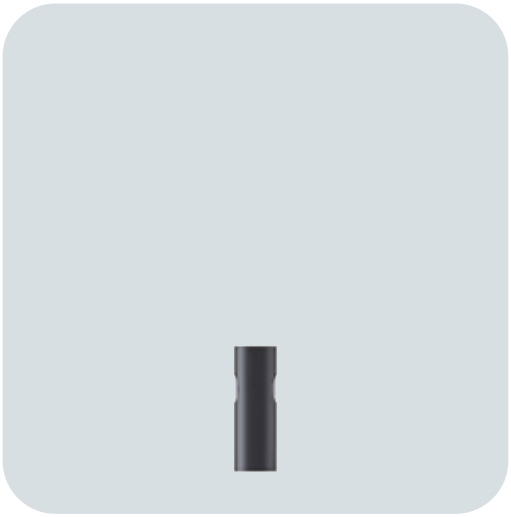

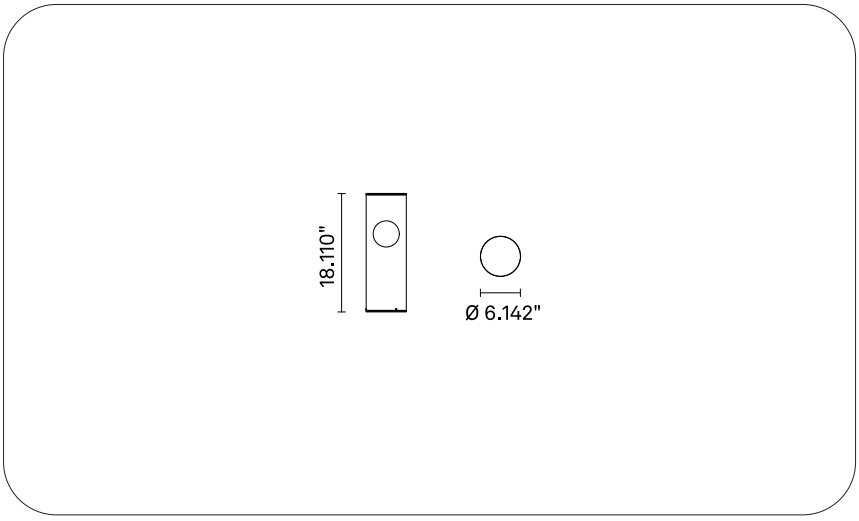

ORDERING INFORMATION / GUIDE

Example: **PLNEB02-U-D00-830-L010-SS-V0-F02-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D00 Diffuse	**830** Ra80 3000 K	**L004** 400 lm	**SS** Smoky grey	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
	8CW Ra80 RGBW	**L010** 1000 lm			**F30** DMX		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
COB LED.

Energy-efficiency class: C
LED forward current: 269-700 mA
Power rating: 20 W
Nominal Flux: 350-1000 lm
Nominal CCT (Color temperature): 3000 K, RGBW
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3, ≤5
Rated lifetime: L90 = 100000 h (Ts = 105 °C, 945 mA), L90 = 90000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Single silicone lens.

Optical efficiency: LOR = 100% ULOR = 50%
LED quantity: 2, 12
Cutoff Angle: Non Cutoff C = 90° γ = 90°
Luminous flux: 350-1000 lm
Luminous efficacy: 15-42 lm/W
BUG: B=0, U=3, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 24 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.9
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +122 °F
Driver included: Yes
Cable type: 5GAWG18 SJTW
Surge protection: 10kV CM - 6kV DM, 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.
Polycarbonate protective screen and osmotic valve for internal/external pressure balancing.
Stainless steel or burnished screws.

Diameter: 6.142 in
Height: 18.11 in
Weight: 11.02 lb
EPA: 0.75 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Ground installation with 3 1/2” hole spacing (Ø 3/8” holes) and securing of the tube to the base via three M4 set screws.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.





H 24” | 1 light	230
H 24” | 2 lights	232
H 35” | 1 light	234
H 35” | 2 lights	236
H 98” | 1 light	238
H 98” | 2 lights	240

Pictor Bollard

PICTOR BOLLARD


Design: Neri



The balance of forms and the extreme attention to construction quality add up to excellent lighting performance. The collection consists of a system of bollards available in different sizes with LED engines that can be configured in terms of colour temperature, luminous flux and control protocols.

PICTOR BOLLARD | LUMINAIRE | H 24” | 1 LIGHT



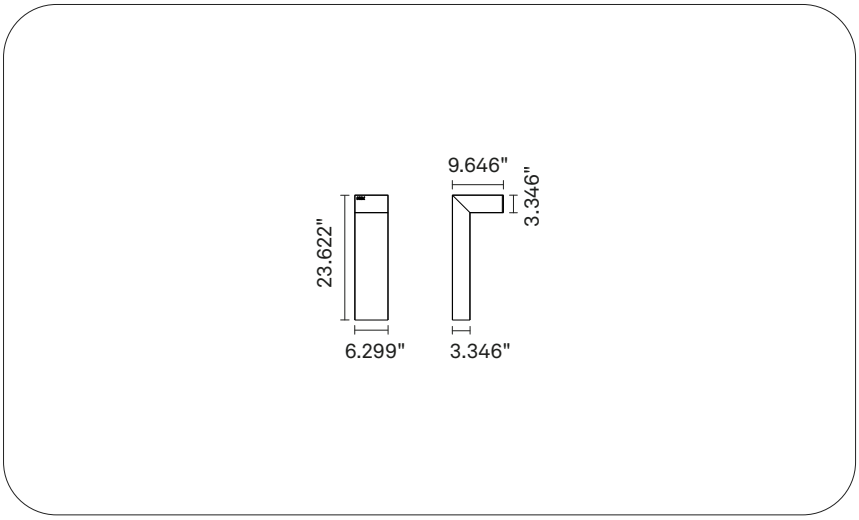

ORDERING INFORMATION / GUIDE

Example: **BOPIC01-U-D36-830-L006-ST-V0-F27-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D36 T2 medium	**830** Ra80 3000 K	**L006** 600 lm	**ST** Transparent	**V0** 120V-277V	**F27** ON/OFF+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D24 T4 wide	**840** Ra80 4000 K	**L010** 1000 lm			**F35** 0-10V+CLO		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 172-334 mA
Power rating: 3.6-7.2 W
Nominal Flux: 550-1000 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 500 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 8
Cutoff Angle: Cutoff, Semi Cutoff C = 20, 45° γ = 62, 66°
Luminous flux: 550-1000 lm
Luminous efficacy: 106-138 lm/W
BUG: B=0, U=0, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 4-9.4 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F
Driver included: Yes
Cable type: 3GAWG18, 5GAWG18
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with extruded aluminum outer frame, integrated aluminum die-cast heat sink, and extra-clear tempered glass protective screen with IK08 impact resistance (EN 62262).
Steel sheet mounting bracket, fixing plug kit, and stainless steel and blackened screws.
Body also supported by aluminum sheet.


Length: 9.646 in
Width: 6.299 in
Height: 23.622 in
Weight: 25.35 lb
EPA: 0.65 ft²
Protection degree: IP66
Mechanical resistance: IK08

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PICTOR BOLLARD | LUMINAIRE | H 24” | 2 LIGHTS



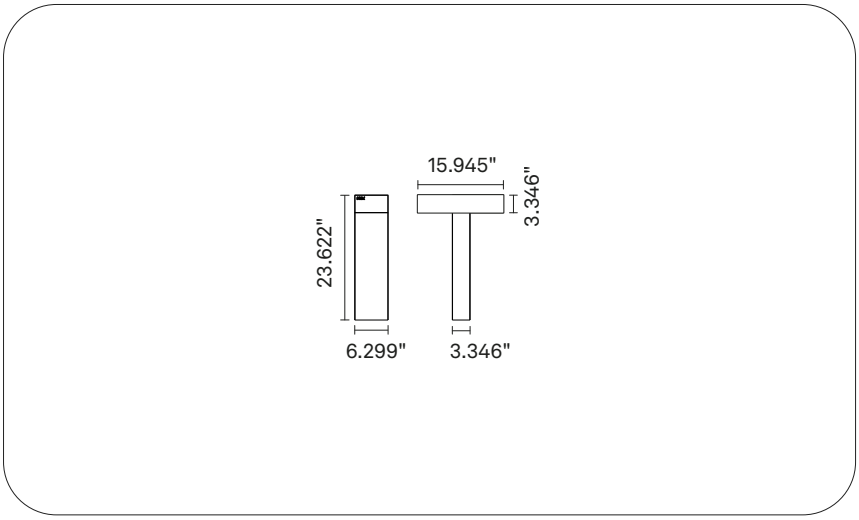

ORDERING INFORMATION / GUIDE

Example: **BOPIC02-U-D36-830-L011-ST-V0-F27-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D36 T2 medium	**830** Ra80 3000 K	**L011** 1100 lm	**ST** Transparent	**V0** 120V-277V	**F27** ON/OFF+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D24 T4 wide	**840** Ra80 4000 K	**L020** 2000 lm			**F35** 0-10V+CLO		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 172-334 mA
Power rating: 7.3-14.5 W
Nominal Flux: 1100-2000 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 500 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16
Cutoff Angle: Cutoff C = 15, 45° γ = 62, 65°
Luminous flux: 1100-2000 lm
Luminous efficacy: 110-136 lm/W
BUG: B=1, U=0, G=0-1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 8.1-17.6 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F

Driver included: Yes
Cable type: 3GAWG18, 5GAWG18
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with extruded aluminum outer frame, integrated aluminum die-cast heat sink, and extra-clear tempered glass protective screen with IK08 impact resistance (EN 62262).
Steel sheet mounting bracket, fixing plug kit, and stainless steel and blackened screws.
Body also supported by aluminum sheet.


Length: 15.945 in
Width: 6.299 in
Height: 23.622 in
Weight: 28.66 lb
EPA: 0.75 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Rectangular flange (6” x 3”, 3/16” thick) equipped with four holes (Ø 3/8”) for ground fixing.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PICTOR BOLLARD | LUMINAIRE | H 35” | 1 LIGHT

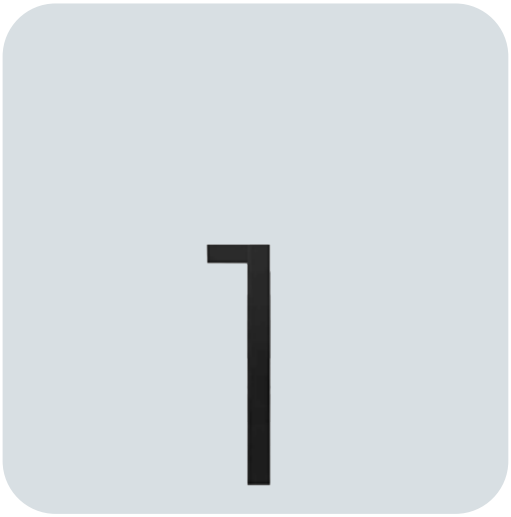

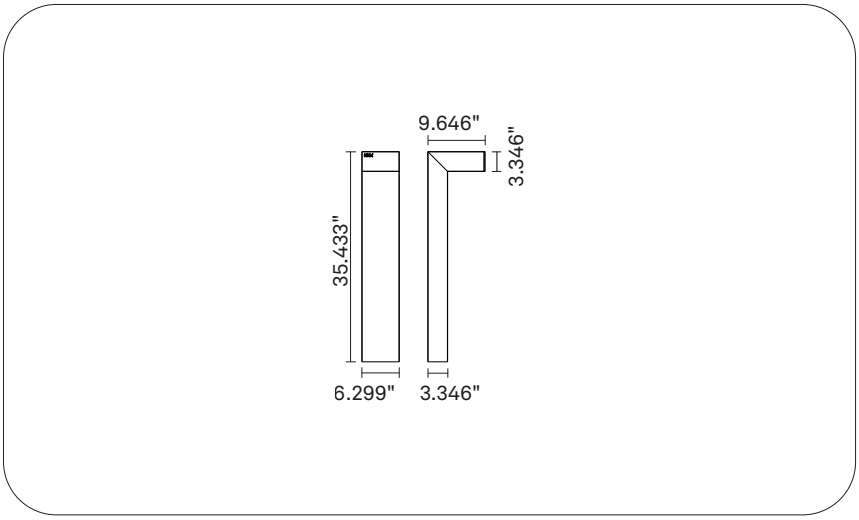

ORDERING INFORMATION / GUIDE

Example: **BOPIC03-U-D36-830-L006-ST-V0-F27-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D36 T2 medium	**830** Ra80 3000 K	**L006** 600 lm	**ST** Transparent	**V0** 120V-277V	**F27** ON/OFF+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D24 T4 wide	**840** Ra80 4000 K	**L010** 1000 lm			**F35** 0-10V+CLO		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 172-334 mA
Power rating: 3.6-7.2 W
Nominal Flux: 550-1000 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 500 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 8
Cutoff Angle: Cutoff, Semi Cutoff C = 20, 45° γ = 62, 66°
Luminous flux: 550-1000 lm
Luminous efficacy: 106-138 lm/W
BUG: B=0, U=0, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 4-9.4 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F

Driver included: Yes
Cable type: 3GAWG18, 5GAWG18
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with extruded aluminum outer frame, integrated aluminum die-cast heat sink, and extra-clear tempered glass protective screen with IK08 impact resistance (EN 62262).
Steel sheet mounting bracket, fixing plug kit, and stainless steel and blackened screws.
Body also supported by aluminum sheet.


Length: 9.646 in
Width: 6.299 in
Height: 35.433 in
Weight: 28.66 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Rectangular flange (6” x 3”, 3/16” thick) equipped with four holes (Ø 3/8”) for ground fixing.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PICTOR BOLLARD | LUMINAIRE | H 35” | 2 LIGHTS

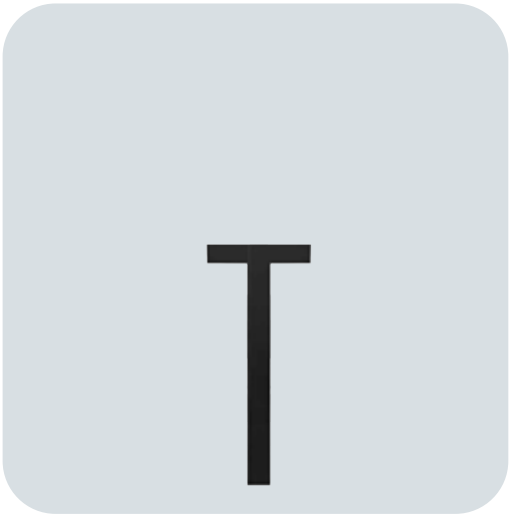

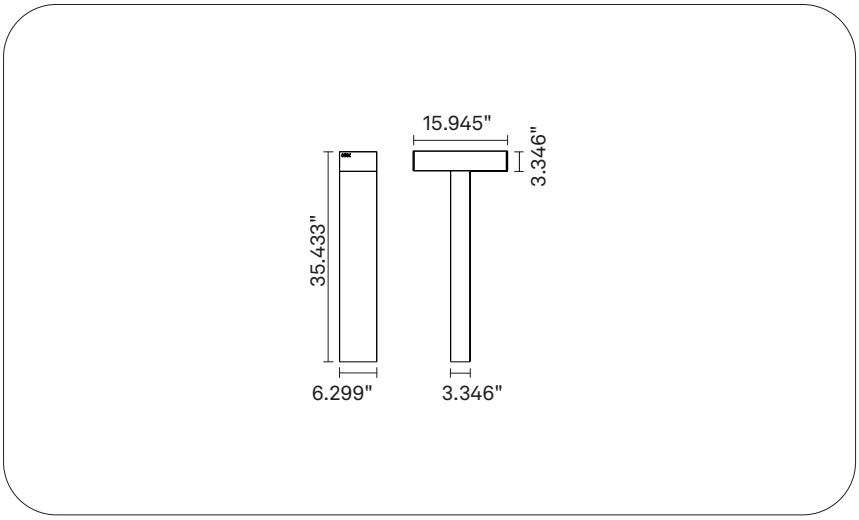

ORDERING INFORMATION / GUIDE

Example: **BOPIC04-U-D36-830-L011-ST-V0-F27-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D36 T2 medium	**830** Ra80 3000 K	**L011** 1100 lm	**ST** Transparent	**V0** 120V-277V	**F27** ON/OFF+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D24 T4 wide	**840** Ra80 4000 K	**L020** 2000 lm			**F35** 0-10V+CLO		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 172-334 mA
Power rating: 7.3-14.5 W
Nominal Flux: 1100-2000 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 500 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16
Cutoff Angle: Cutoff C = 15, 45° γ = 62, 65°
Luminous flux: 1100-2000 lm
Luminous efficacy: 110-136 lm/W
BUG: B=1, U=0, G=0-1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 8.1-17.6 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F

Driver included: Yes
Cable type: 3GAWG18, 5GAWG18
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with extruded aluminum outer frame, integrated aluminum die-cast heat sink, and extra-clear tempered glass protective screen with IK08 impact resistance (EN 62262).
Steel sheet mounting bracket, fixing plug kit, and stainless steel and blackened screws.
Body also supported by aluminum sheet.


Length: 15.945 in
Width: 6.299 in
Height: 35.433 in
Weight: 31.97 lb
EPA: 1.08 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Rectangular flange (6” x 3”, 3/16” thick) equipped with four holes (Ø 3/8”) for ground fixing.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PICTOR BOLLARD | LUMINAIRE | H 98” | 1 LIGHT

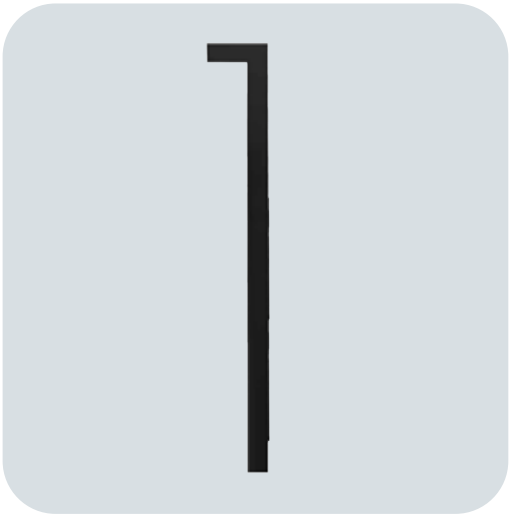

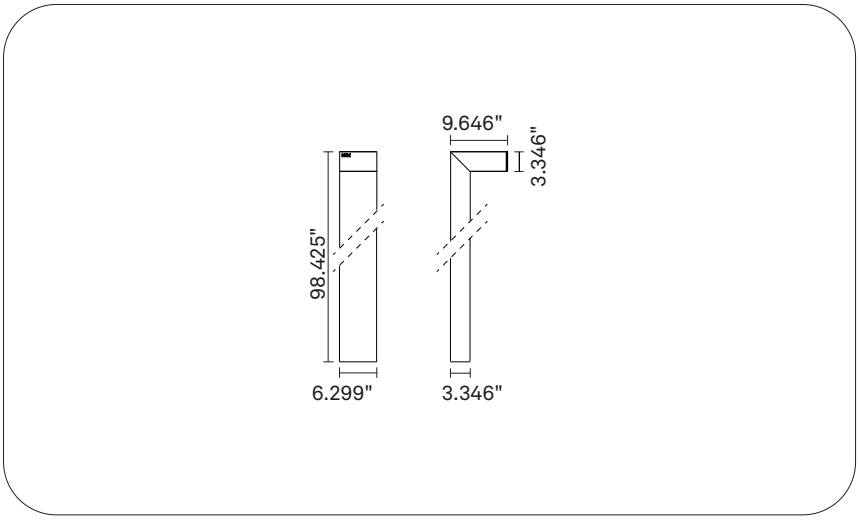

ORDERING INFORMATION / GUIDE

Example: **BOPIC05-U-D36-830-L015-SP-V0-F27-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D36 T2 medium	**830** Ra80 3000 K	**L015** 1500 lm	**SP** Prismatic	**V0** 120V-277V	**F27** ON/OFF+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D24 T4 wide	**840** Ra80 4000 K	**L025** 2500 lm			**F35** 0-10V+CLO		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 496-896 mA
Power rating: 10.7-19.6 W
Nominal Flux: 1500-2500 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 500 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 16
Cutoff Angle: Semi Cutoff C = 25, 50° γ = 50, 52°
Luminous flux: 1500-2500 lm
Luminous efficacy: 107-126 lm/W
BUG: B=0-1, U=0, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 11.9-23 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F

Driver included: Yes
Cable type: 3GAWG18, 5GAWG18
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with extruded aluminum outer frame, integrated aluminum die-cast heat sink, and extra-clear tempered glass protective screen with IK08 impact resistance (EN 62262).
Steel sheet mounting bracket, fixing plug kit, and stainless steel and blackened screws.
Body also supported by aluminum sheet.

Length: 6.299 in
Width: 9.646 in
Height: 98.425 in
Weight: 45.19 lb
EPA: 2.26 ft²
Protection degree: IP66
Mechanical resistance: IK08


INSTALLATION
Rectangular flange (6” x 3”, 3/16” thick) equipped with four holes (Ø 3/8”) for ground fixing.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



PICTOR BOLLARD | LUMINAIRE | H 98” | 2 LIGHTS



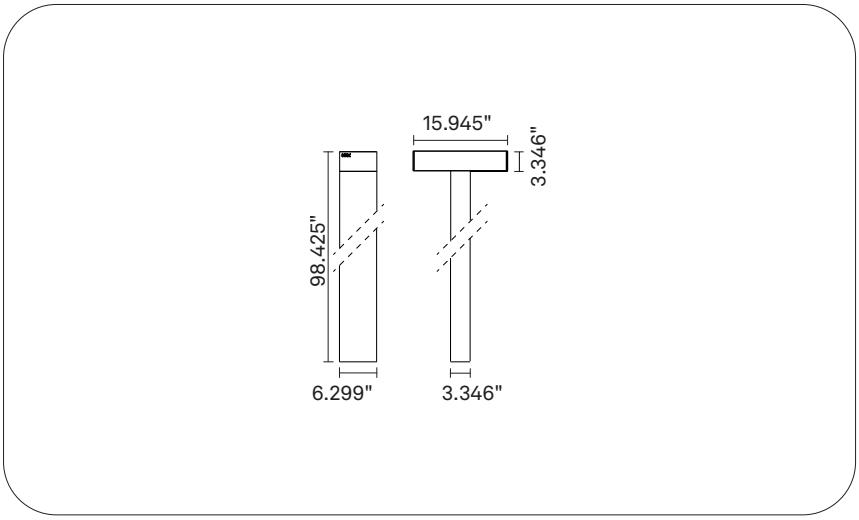

ORDERING INFORMATION / GUIDE

Example: **BOPIC06-U-D36-830-L030-SP-V0-F27-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D36 T2 medium	**830** Ra80 3000 K	**L030** 3000 lm	**SP** Prismatic	**V0** 120V-277V	**F27** ON/OFF+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D24 T4 wide	**840** Ra80 4000 K	**L045** 4500 lm			**F35** 0-10V+CLO		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D
LED forward current: 496-800 mA
Power rating: 21.3-34.9 W
Nominal Flux: 3000-4500 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 83-85 Rg = 95-96
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 500 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 32
Cutoff Angle: Semi Cutoff C = 15, 40° γ = 48, 51°
Luminous flux: 3000-4500 lm
Luminous efficacy: 115-127 lm/W
BUG: B=1-2, U=0, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 23.7-39.3 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)
Ambient temperature: -31 °F / +95 °F

Driver included: Yes
Cable type: 3GAWG18, 5GAWG18
Cable length: 3.281 ft
Surge protection: 20kV CM - 20kV DM

MECHANICAL CHARACTERISTICS
Structure with extruded aluminum outer frame, integrated aluminum die-cast heat sink, and extra-clear tempered glass protective screen with IK08 impact resistance (EN 62262).
Steel sheet mounting bracket, fixing plug kit, and stainless steel and blackened screws.
Body also supported by aluminum sheet.

Length: 6.299 in
Width: 15.945 in
Height: 98.425 in
Weight: 48.5 lb
EPA: 2.48 ft²
Protection degree: IP66
Mechanical resistance: IK08

INSTALLATION
Rectangular flange (6” x 3”, 3/16” thick) equipped with four holes (Ø 3/8”) for ground fixing.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






PURE | H 16”	244	NEW
CARVE | H 16”	246	NEW
PURE | H 31.5”	248	NEW
CARVE | H 31.5”	250	NEW
PURE | H 40”	252	NEW
CARVE | H 40”	254	NEW

Polis Bollard

POLIS BOLLARD

Design: Neri


NEW

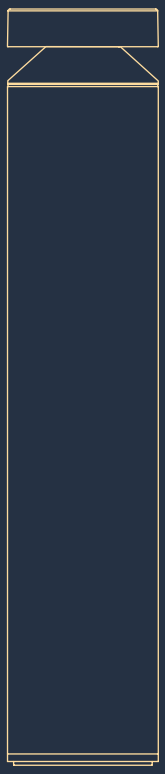

Bollard Polis is a new interpretation of an iconic form, reimagined with unique details. Two cones, two identities, engaging in dialogue with architecture and helping to define space. Polis plays with light and material, transforming a functional object into a visual experience.

POLIS BOLLARD | LUMINAIRE | PURE | H 16”



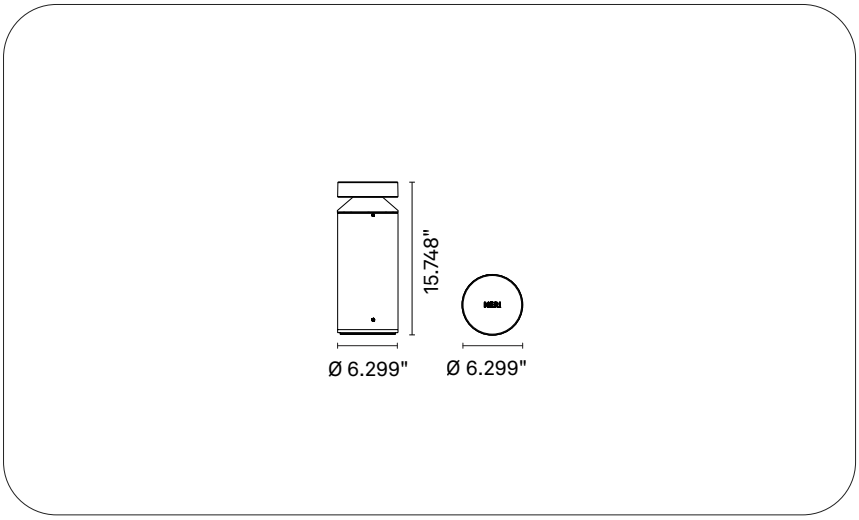

ORDERING INFORMATION / GUIDE

Example: **BOPOL00-U-D54-927-L002-ST-V0-F06-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D54 90°	**927** Ra90 2700 K	**L002** 200 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D53 180°	**930** Ra90 3000 K	**L005** 500 lm			**F45** DALI+CASAMBI		
D52 360°	**940** Ra90 4000 K	**L009** 900 lm			**F06** DALI+CLO		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
Medium-power LED matrix.

Energy-efficiency class: C, D
LED forward current: 182-480 mA
Power rating: 3.2-11.6 W
Nominal Flux: 200-900 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 90
Standard Deviation Colour Matching: ≤5
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 1%
LED quantity: 12, 24, 48
Cutoff Angle: Non Cutoff, Semi Cutoff C = 0° γ = 53, 54°
Luminous flux: 200-900 lm
Luminous efficacy: 39-68 lm/W
BUG: B=0-1, U=1, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 4.6-14.4 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -13 °F / +122 °F
Driver included: Yes
Cable type: SJTW 5GAWG18
Cable length: 3.281 ft
Surge protection: 10kV CM - 10kV DM

MECHANICAL CHARACTERISTICS
Structure with an extruded aluminum outer frame and an integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered transparent anti-reflective glass, exposed stainless steel or blackened screws, and plastic components.
Body supported by galvanized steel sheet.

Diameter: 6.299 in
Height: 15.748 in
Weight: 15.43 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Ground fixing using the appropriate flange.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



POLIS BOLLARD | LUMINAIRE | CARVE | H 16”



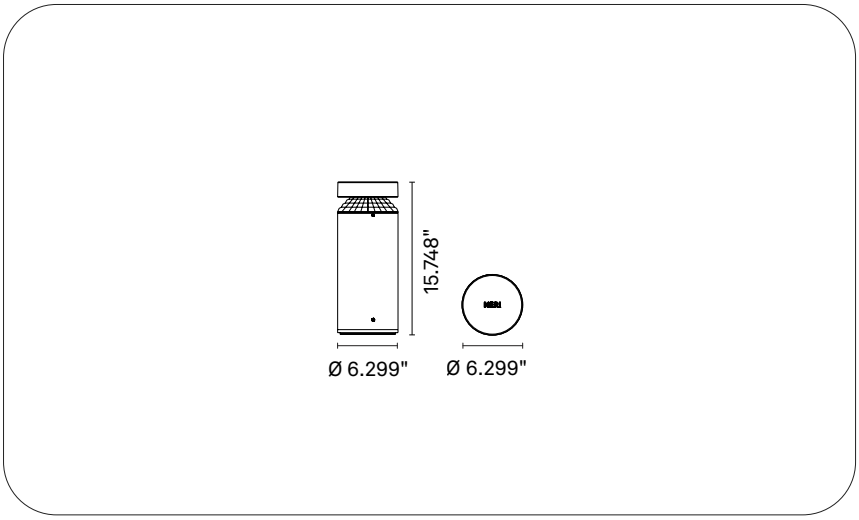

ORDERING INFORMATION / GUIDE

Example: **BOPOL03-U-D54-927-L002-ST-V0-F06-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D54 90°	**927** Ra90 2700 K	**L002** 200 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D53 180°	**930** Ra90 3000 K	**L005** 500 lm			**F45** DALI+CASAMBI		
D52 360°	**940** Ra90 4000 K	**L009** 900 lm			**F06** DALI+CLO		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
Medium-power LED matrix.

Energy-efficiency class: C, D
LED forward current: 182-480 mA
Power rating: 3.2-11.6 W
Nominal Flux: 200-900 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 90
Standard Deviation Colour Matching: ≤5
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 1%
LED quantity: 12, 24, 48
Cutoff Angle: Non Cutoff, Semi Cutoff C = 0° γ = 53, 54°
Luminous flux: 200-900 lm
Luminous efficacy: 39-68 lm/W
BUG: B=0-1, U=1, G=0
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 4.6-14.4 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -13 °F / +122 °F
Driver included: Yes
Cable type: SJTW 5GAWG18
Cable length: 3.281 ft
Surge protection: 10kV CM - 10kV DM

MECHANICAL CHARACTERISTICS
Structure with an extruded aluminum outer frame and an integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered transparent anti-reflective glass, exposed stainless steel or blackened screws, and plastic components.
Body supported by galvanized steel sheet.

Diameter: 6.299 in
Height: 15.748 in
Weight: 15.43 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Ground fixing using the appropriate flange.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



POLIS BOLLARD | LUMINAIRE | PURE | H 31.5”



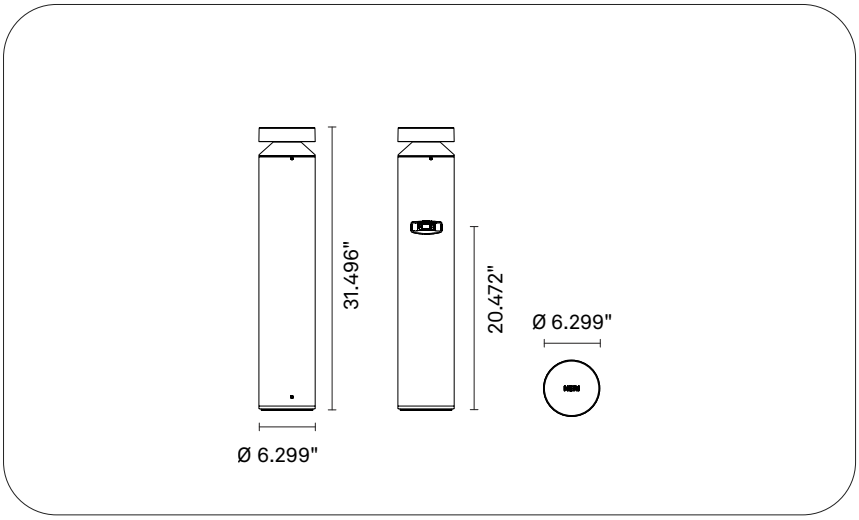

ORDERING INFORMATION / GUIDE

Example: **BOPOL01-U-D54-927-L003-ST-V0-F06-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D54 90°	**927** Ra90 2700 K	**L003** 300 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D53 180°	**930** Ra90 3000 K	**L006** 600 lm			**F46** DALI+PIR		
D52 360°	**940** Ra90 4000 K	**L013** 1300 lm			**F45** DALI+CASAMBI		
					F06 DALI+CLO		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
Medium-power LED matrix.

Energy-efficiency class: C, D
LED forward current: 292-676 mA
Power rating: 5.4-17.3 W
Nominal Flux: 300-1250 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 90
Standard Deviation Colour Matching: ≤5
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 1%
LED quantity: 12, 24, 48
Cutoff Angle: Non Cutoff, Semi Cutoff C = 0° γ = 53, 54°
Luminous flux: 300-1250 lm
Luminous efficacy: 37-67 lm/W
BUG: B=0-1, U=1, G=0-1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 7.4-20.6 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -13 °F / +122 °F
Driver included: Yes
Cable type: SJTW 5GAWG18
Cable length: 3.281 ft
Surge protection: 10kV CM - 10kV DM

MECHANICAL CHARACTERISTICS
Structure with an extruded aluminum outer frame and an integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered transparent anti-reflective glass, exposed stainless steel or blackened screws, and plastic components.
Body supported by galvanized steel sheet.

Diameter: 6.299 in
Height: 31.496 in
Weight: 19.84 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Ground fixing using the appropriate flange.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



POLIS BOLLARD | LUMINAIRE | CARVE | H 31.5”



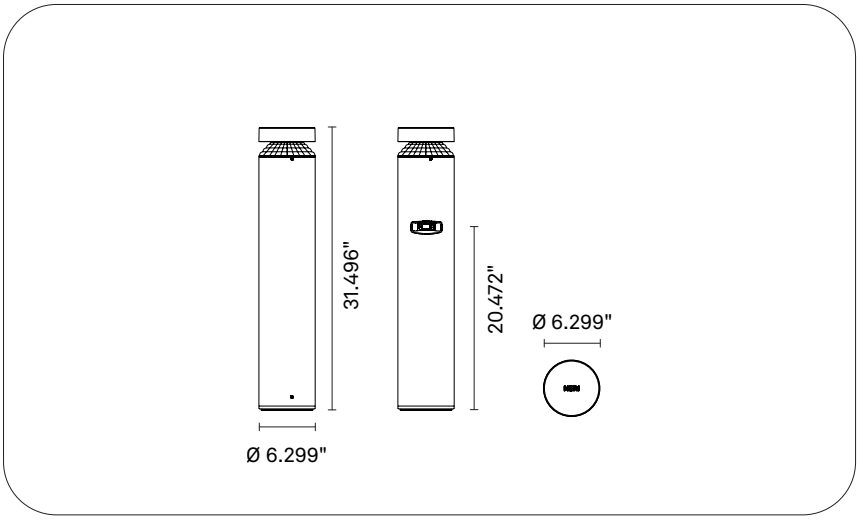

ORDERING INFORMATION / GUIDE

Example: **BOPOL04-U-D54-927-L003-ST-V0-F06-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D54 90°	**927** Ra90 2700 K	**L003** 300 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D53 180°	**930** Ra90 3000 K	**L006** 600 lm			**F46** DALI+PIR		
D52 360°	**940** Ra90 4000 K	**L013** 1300 lm			**F45** DALI+CASAMBI		
					F06 DALI+CLO		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
Medium-power LED matrix.

Energy-efficiency class: C, D
LED forward current: 292-676 mA
Power rating: 5.4-17.3 W
Nominal Flux: 300-1250 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K
Color Rendering Index (Ra): 90
Standard Deviation Colour Matching: ≤5
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 1%
LED quantity: 12, 24, 48
Cutoff Angle: Non Cutoff, Semi Cutoff C = 0° γ = 53, 54°
Luminous flux: 300-1250 lm
Luminous efficacy: 37-67 lm/W
BUG: B=0-1, U=1, G=0-1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 7.4-20.6 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -13 °F / +122 °F
Driver included: Yes
Cable type: SJTW 5GAWG18
Cable length: 3.281 ft
Surge protection: 10kV CM - 10kV DM

MECHANICAL CHARACTERISTICS
Structure with an extruded aluminum outer frame and an integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered transparent anti-reflective glass, exposed stainless steel or blackened screws, and plastic components.
Body supported by galvanized steel sheet.

Diameter: 6.299 in
Height: 31.496 in
Weight: 19.84 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Ground fixing using the appropriate flange.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



POLIS BOLLARD | LUMINAIRE | PURE | H 40”



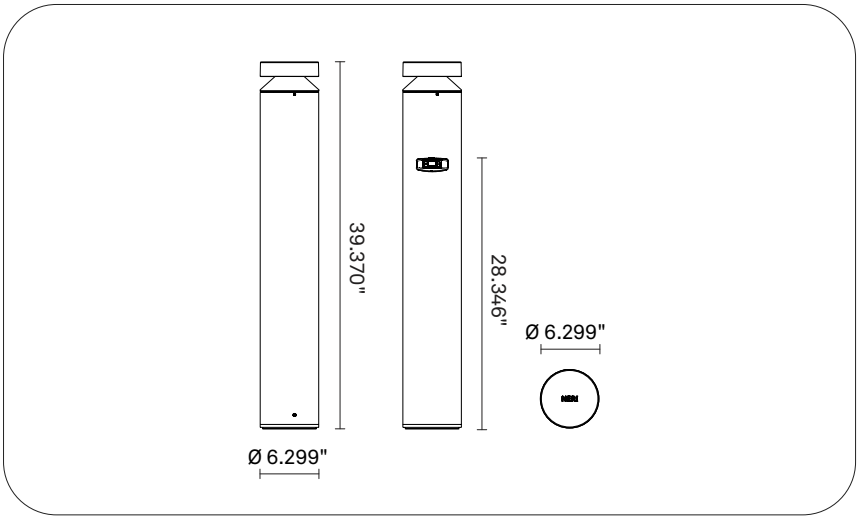

ORDERING INFORMATION / GUIDE

Example: **BOPOL02-U-D54-927-L003-ST-V0-F06-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D54 90°	**927** Ra90 2700 K	**L003** 300 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D53 180°	**930** Ra90 3000 K	**L004** 400 lm			**F46** DALI+PIR		
D52 360°	**940** Ra90 4000 K	**L006** 600 lm			**F45** DALI+CASAMBI		
	XAM Amber	**L014** 1400 lm			**F06** DALI+CLO		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
Medium-power LED matrix.

Energy-efficiency class: , C, D
LED forward current: 292-676 mA
Power rating: 5.4-19.1 W
Nominal Flux: 300-1350 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 90
Standard Deviation Colour Matching: ≤5
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 1%
LED quantity: 12, 24, 48
Cutoff Angle: Non Cutoff, Semi Cutoff C = 0° γ = 53, 54°
Luminous flux: 300-1350 lm
Luminous efficacy: 18-67 lm/W
BUG: B=0-1, U=1, G=0-1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 7.4-22.6 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -13 °F / +122 °F
Driver included: Yes
Cable type: SJTW 5GAWG18
Cable length: 4.921 ft
Surge protection: 10kV CM - 10kV DM

MECHANICAL CHARACTERISTICS
Structure with an extruded aluminum outer frame and an integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered transparent anti-reflective glass, exposed stainless steel or blackened screws, and plastic components.
Body supported by galvanized steel sheet.

Diameter: 6.299 in
Height: 39.37 in
Weight: 22.05 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK10


INSTALLATION
Ground fixing using the appropriate flange.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



POLIS BOLLARD | LUMINAIRE | CARVE | H 40”



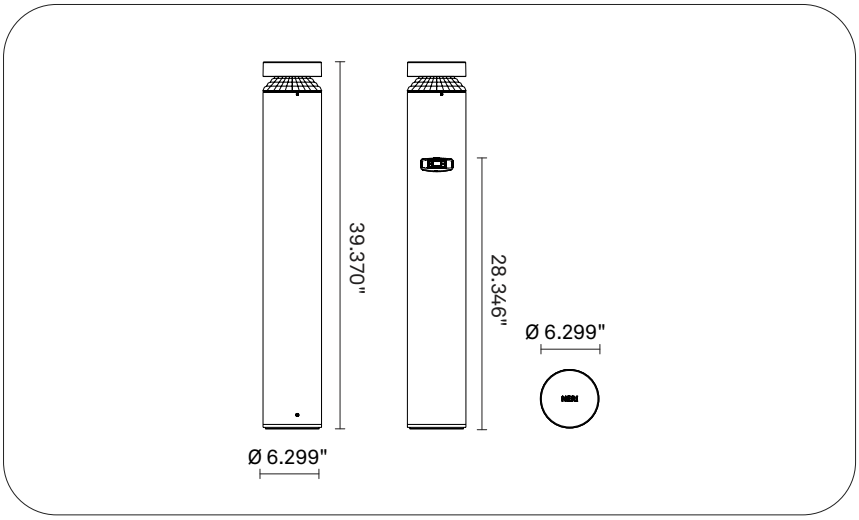

ORDERING INFORMATION / GUIDE

Example: **BOPOL05-U-D54-927-L003-ST-V0-F06-MU-CN0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D54 90°	**927** Ra90 2700 K	**L003** 300 lm	**ST** Transparent	**V0** 120V-277V	**F35** 0-10V+CLO	**MU** UL	**CN0** Grey [Neri] Textured
D53 180°	**930** Ra90 3000 K	**L004** 400 lm			**F46** DALI+PIR		
D52 360°	**940** Ra90 4000 K	**L006** 600 lm			**F45** DALI+CASAMBI		
	XAM Amber	**L014** 1400 lm			**F06** DALI+CLO		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Photographer: DUBO - Visual storytelling and strategy

SOURCE
Medium-power LED matrix.

Energy-efficiency class: , C, D
LED forward current: 292-676 mA
Power rating: 5.4-19.1 W
Nominal Flux: 300-1350 lm
Nominal CCT (Color temperature): 2700 K, 3000 K, 4000 K, Amber
Color Rendering Index (Ra): 90
Standard Deviation Colour Matching: ≤5
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 1%
LED quantity: 12, 24, 48
Cutoff Angle: Non Cutoff, Semi Cutoff C = 0° γ = 53, 54°
Luminous flux: 300-1350 lm
Luminous efficacy: 18-67 lm/W
BUG: B=0-1, U=1, G=0-1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 7.4-22.6 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -13 °F / +122 °F
Driver included: Yes
Cable type: SJTW 5GAWG18
Cable length: 4.921 ft
Surge protection: 10kV CM - 10kV DM

MECHANICAL CHARACTERISTICS
Structure with an extruded aluminum outer frame and an integrated die-cast aluminum heat sink.
Protective screen in extra-clear tempered transparent anti-reflective glass, exposed stainless steel or blackened screws, and plastic components.
Body supported by galvanized steel sheet.

Diameter: 6.299 in
Height: 39.37 in
Weight: 22.05 lb
EPA: 0.86 ft²
Protection degree: IP66
Mechanical resistance: IK10

INSTALLATION
Ground fixing using the appropriate flange.

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.





Brenta S 258
Brenta L 260

Brenta Applique


BRENTA APPLIQUE


Design: EMO Design



Brenta Applique is part of the eponymous collection, made with one of the most beautiful and evocative materials in the history of architecture: concrete - fluid, durable and sustainable, yet at the same time solid, artisanal and sensual.

BRENTA APPLIQUE | LUMINAIRE | BRENTA S

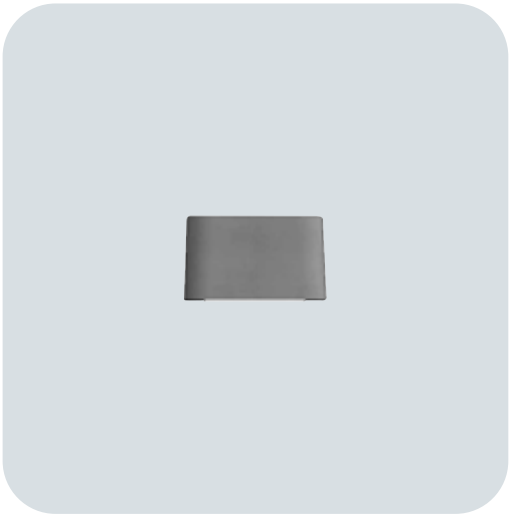

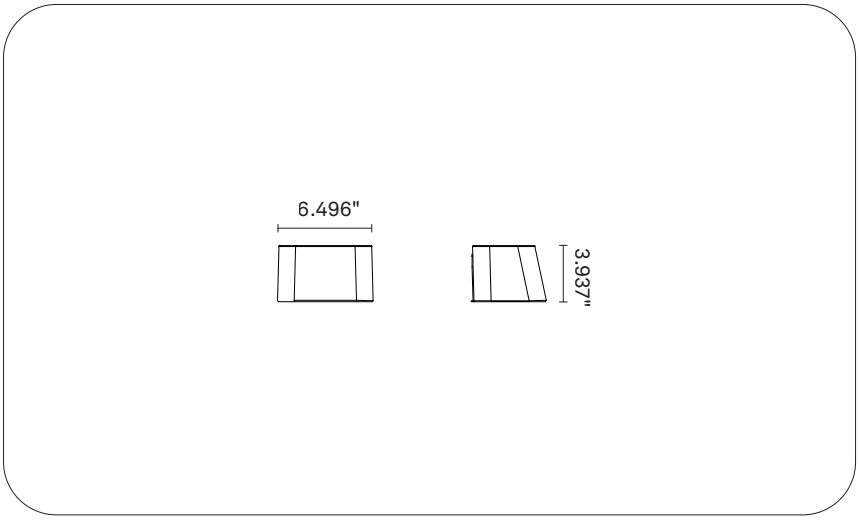

ORDERING INFORMATION / GUIDE

Example: **BRS6999-U-D20-830-L010-SP-V0-F02-MU-CG0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D20 T2 short	**830** Ra80 3000 K	**L010** 1000 lm	**SP** Prismatic	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CG0** Grey [RAL 9006] Matt
	840 Ra80 4000 K						

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: E
LED forward current: 450 mA
Power rating: 13 W
Nominal Flux: 966-1036 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 2
Cutoff Angle: Semi Cutoff C = 40° γ = 32°
Luminous flux: 966-1036 lm
Luminous efficacy: 74-80 lm/W
BUG: B=0, U=0, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 13 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F

Driver included: No
Surge protection: 2kV CM - 2kV DM


MECHANICAL CHARACTERISTICS
Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.
NeriConcrete is a flexible paste made by mixing cement powders and components, polymer fibers, colored pigments, and water, adaptable to any mold.
Protective shield in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.
The surface treatment makes the material water-repellent and stain-resistant.


Length: 5.276 in
Width: 6.496 in
Height: 3.937 in
Weight: 7.05 lb
EPA: 0.11 ft²
Protection degree: IP43
Mechanical resistance: IK08

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



BRENTA APPLIQUE | LUMINAIRE | BRENTA L

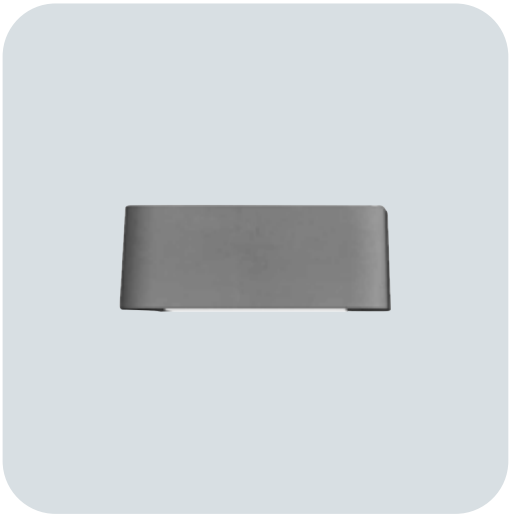

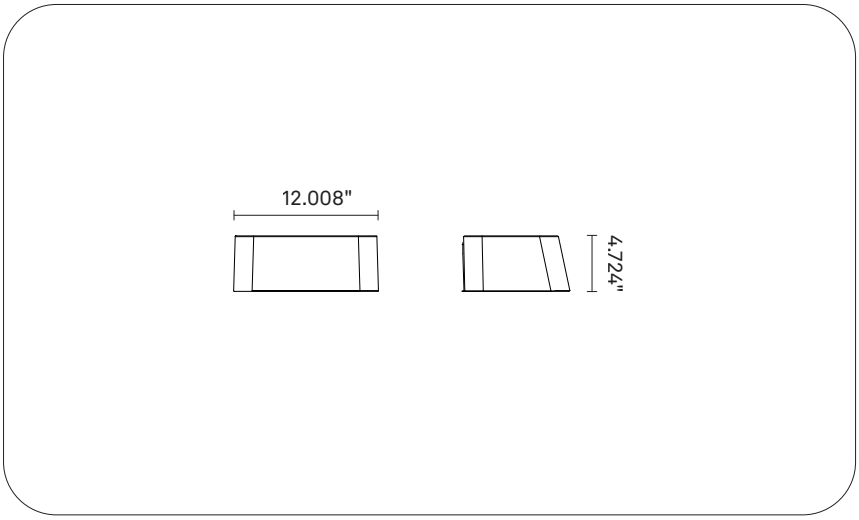

ORDERING INFORMATION / GUIDE

Example: **BRL6999-U-D09-830-L013-SP-V0-F02-MU-CG0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D09 T4	**830** Ra80 3000 K	**L013** 1300 lm	**SP** Prismatic	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CG0** Grey [RAL 9006] Matt
	840 Ra80 4000 K	**L014** 1400 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 450 mA
Power rating: 23 W
Nominal Flux: 1300-1400 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 84-85 Rg = 97-98
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 18
Cutoff Angle: Semi Cutoff C = 30° γ = 56°
Luminous flux: 1300-1400 lm
Luminous efficacy: 50-54 lm/W
BUG: B=1, U=0, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 26 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)


Ambient temperature: -31 °F / +104 °F
Driver included: No
Surge protection: 6kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.
NeriConcrete is a flexible paste made by mixing cement powders and components, polymer fibers, colored pigments, and water, adaptable to any mold.
Protective shield in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.
The surface treatment makes the material water-repellent and stain-resistant.

Length: 9.134 in
Width: 12.008 in
Height: 4.724 in
Weight: 24.25 lb
EPA: 0.32 ft²
Protection degree: IP55
Mechanical resistance: IK08

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



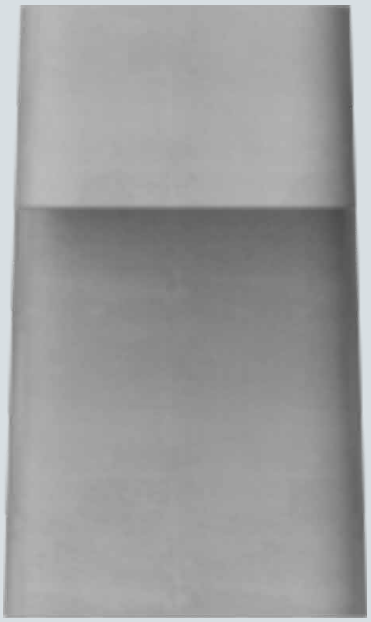


Brenta M 264
Brenta L 266
Brenta XL 268

Brenta Bollard


BRENTA BOLLARD


Design: EMO Design

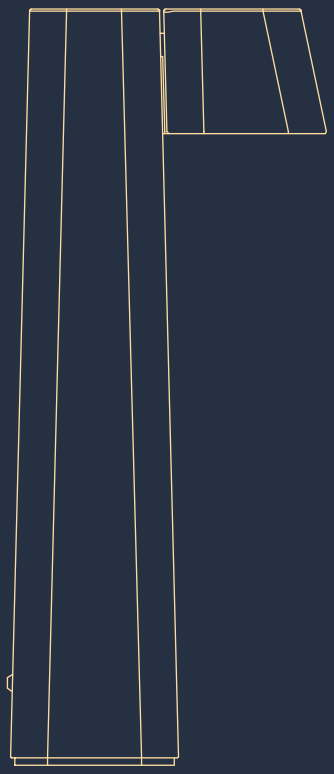

Brenta M, L, and XL are the three lighting bollards part of the eponymous collection, made with one of the most beautiful and evocative materials in the history of architecture: the strong but malleable, fluid but solid, durable but artisanal, sustainable but sexy concrete.

BRENTA BOLLARD | LUMINAIRE | BRENTA M

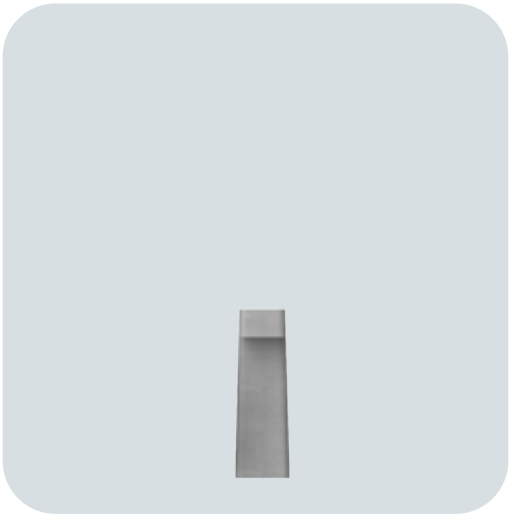

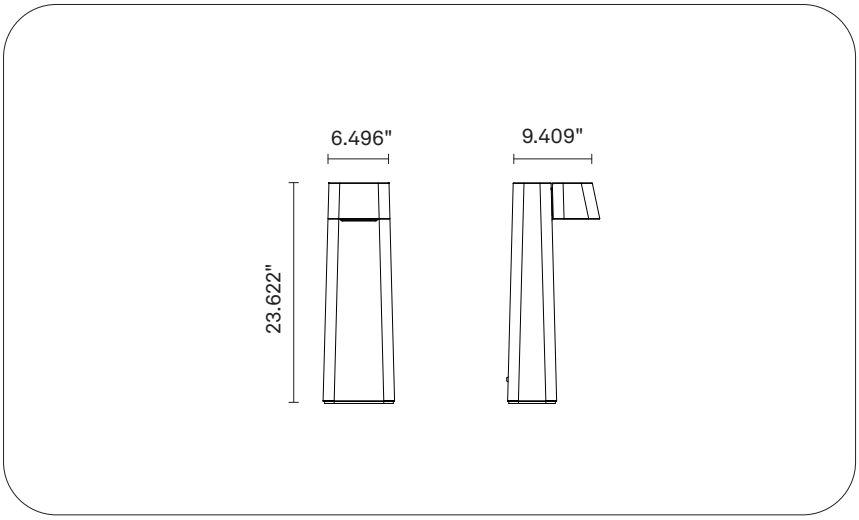

ORDERING INFORMATION / GUIDE

Example: **BR2960005-U-D20-830-L010-SP-V0-F02-MU-CG0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D20 T2 short	**830** Ra80 3000 K	**L010** 1000 lm	**SP** Prismatic	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CG0** Grey [RAL 9006] Matt
	840 Ra80 4000 K						

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: E
LED forward current: 450 mA
Power rating: 13 W
Nominal Flux: 966-1036 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 2
Cutoff Angle: Semi Cutoff C = 45° γ = 32°
Luminous flux: 966-1036 lm
Luminous efficacy: 74-80 lm/W
BUG: B=0, U=0, G=1
Photobiological safety: RG1 - Low risk


ELECTRICAL CHARACTERISTICS
Luminaire power: 13 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F

Driver included: No
Surge protection: 2kV CM - 2kV DM

MECHANICAL CHARACTERISTICS
Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.
NeriConcrete is a flexible paste made by mixing cement powders and components, polymer fibers, colored pigments, and water, adaptable to any mold.
Protective shield in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.
The surface treatment makes the material water-repellent and stain-resistant.


Length: 9.409 in
Width: 6.496 in
Height: 23.622 in
Weight: 41.89 lb
EPA: 0.97 ft²
Protection degree: IP43
Mechanical resistance: IK08

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

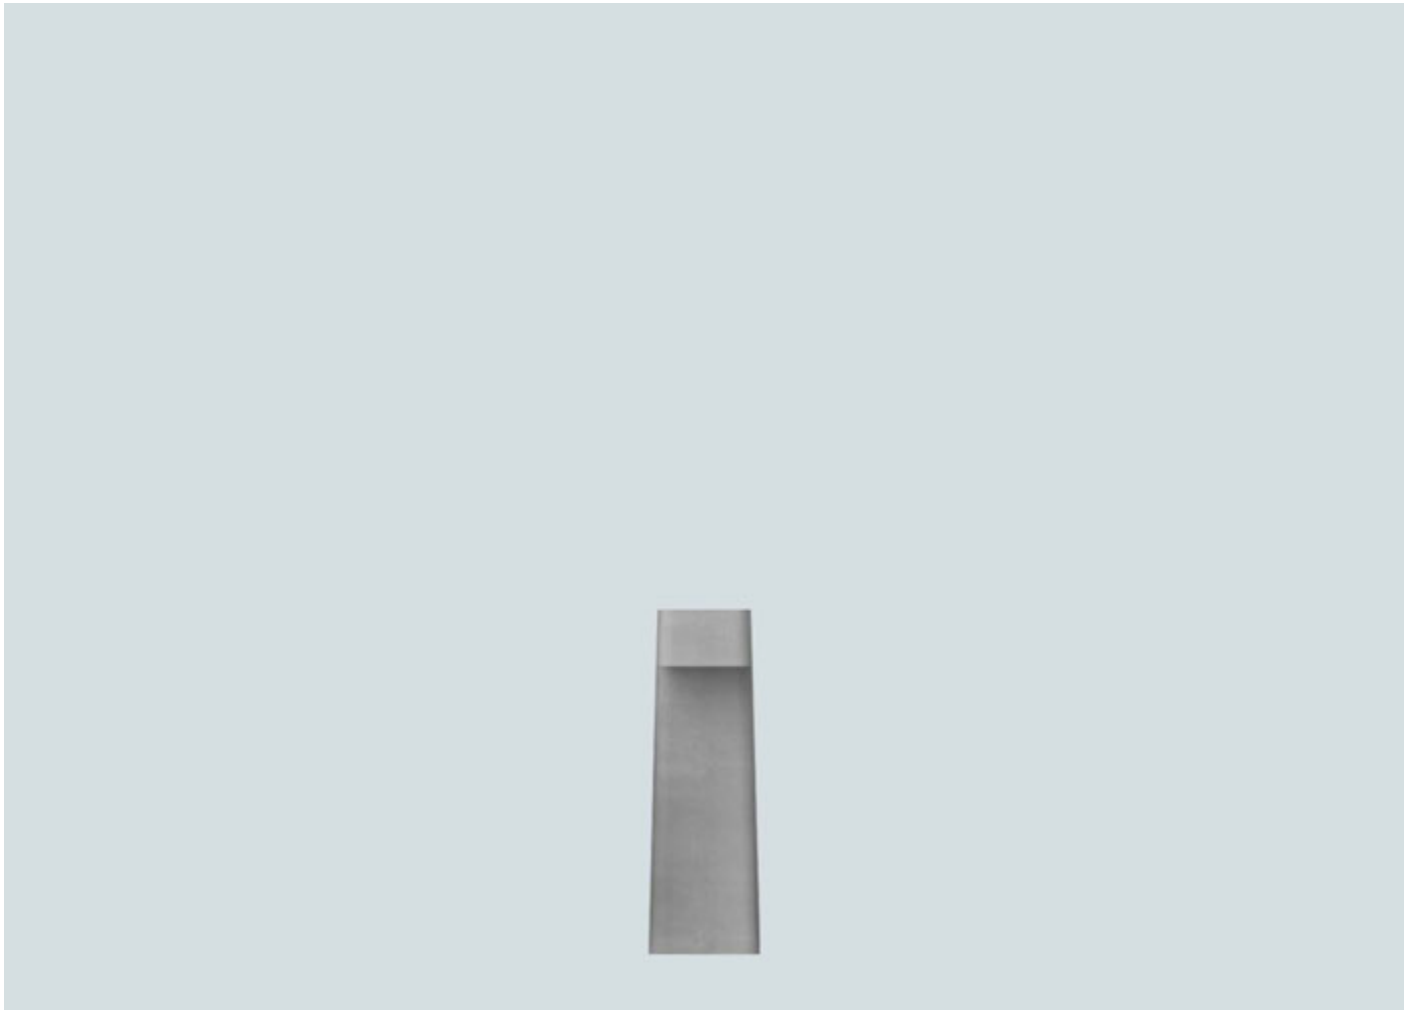

BRENTA BOLLARD | LUMINAIRE | BRENTA L



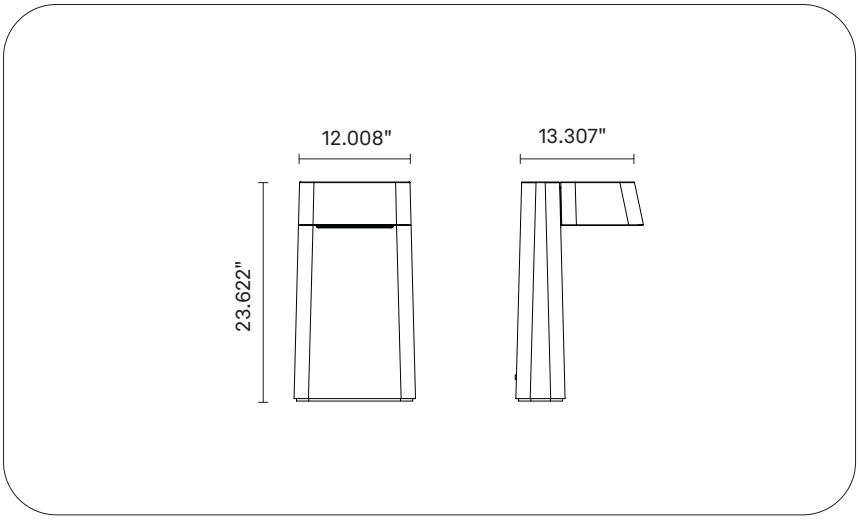

ORDERING INFORMATION / GUIDE

Example: **BR2960003-U-D09-830-L013-SP-V0-F02-MU-CG0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D09 T4	**830** Ra80 3000 K	**L013** 1300 lm	**SP** Prismatic	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CG0** Grey [RAL 9006] Matt
	840 Ra80 4000 K	**L014** 1400 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 450 mA
Power rating: 26 W
Nominal Flux: 1321-1416 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 84-85 Rg = 97-98
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 18
Cutoff Angle: Semi Cutoff C = 25° γ = 54°
Luminous flux: 1321-1416 lm
Luminous efficacy: 51-54 lm/W
BUG: B=0, U=0, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 26 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -31 °F / +104 °F
Driver included: No
Surge protection: 6kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.
NeriConcrete is a flexible paste made by mixing cement powders and components, polymer fibers, colored pigments, and water, adaptable to any mold.
Protective shield in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.
The surface treatment makes the material water-repellent and stain-resistant.


Length: 13.307 in
Width: 12.008 in
Height: 23.622 in
Weight: 94.8 lb
EPA: 1.94 ft²
Protection degree: IP55
Mechanical resistance: IK08

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.



BRENTA BOLLARD | LUMINAIRE | BRENTA XL



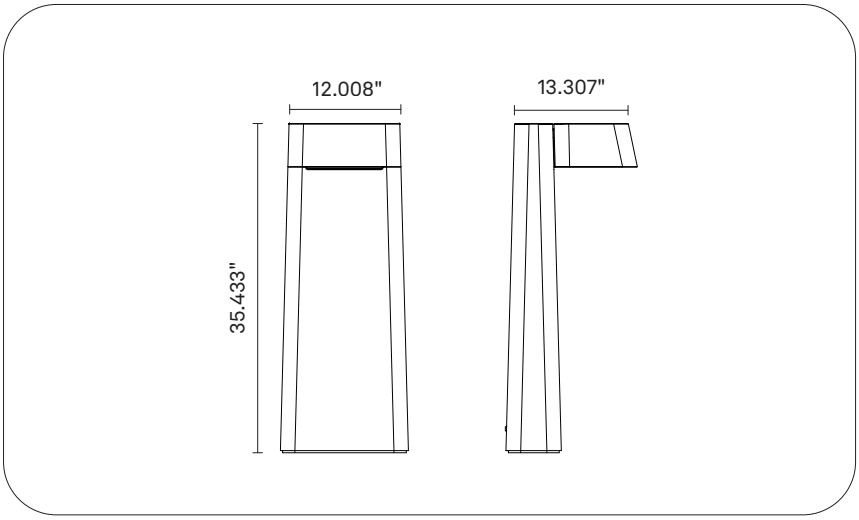

ORDERING INFORMATION / GUIDE

Example: **BR2960001-U-D09-830-L013-SP-V0-F02-MU-CG0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D09 T4	**830** Ra80 3000 K	**L013** 1300 lm	**SP** Prismatic	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CG0** Grey [RAL 9006] Matt
	840 Ra80 4000 K	**L014** 1400 lm					

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: D, E
LED forward current: 450 mA
Power rating: 26 W
Nominal Flux: 1321-1416 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤5
ANSI/IES TM-30: Rf = 84-85 Rg = 97-98
Rated lifetime: L80 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 18
Cutoff Angle: Semi Cutoff C = 35° γ = 56°
Luminous flux: 1321-1416 lm
Luminous efficacy: 51-54 lm/W
BUG: B=0, U=0, G=1
Photobiological safety: RG1 - Low risk

ELECTRICAL CHARACTERISTICS
Luminaire power: 26 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Safe Flicker: PstLM=<1 e SVM=<0,4 (IEC TR 61547-1 e IEC TR 63158)

Ambient temperature: -31 °F / +104 °F
Driver included: No
Surge protection: 6kV CM - 6kV DM

MECHANICAL CHARACTERISTICS
Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.
NeriConcrete is a flexible paste made by mixing cement powders and components, polymer fibers, colored pigments, and water, adaptable to any mold.
Protective shield in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.
The surface treatment makes the material water-repellent and stain-resistant.

Length: 13.307 in
Width: 12.008 in
Height: 35.433 in
Weight: 134.48 lb
EPA: 3.34 ft²
Protection degree: IP55
Mechanical resistance: IK08

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.






Brenta S 272

Brenta Pathlight


BRENTA PATHLIGHT


Design: EMO Design

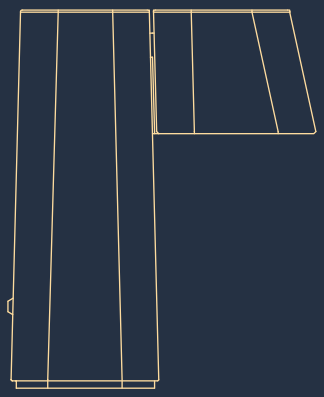

Brenta Pathlight is part of the eponymous collection, made with one of the most beautiful and evocative materials in the history of architecture: concrete - fluid, durable and sustainable, yet at the same time solid, artisanal and sensual.

BRENTA PATHLIGHT | LUMINAIRE | BRENTA S

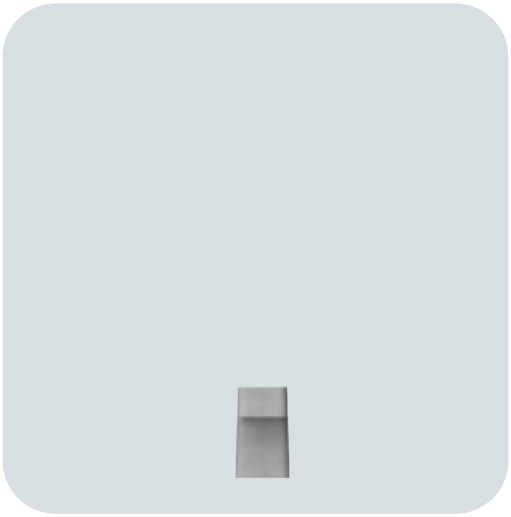

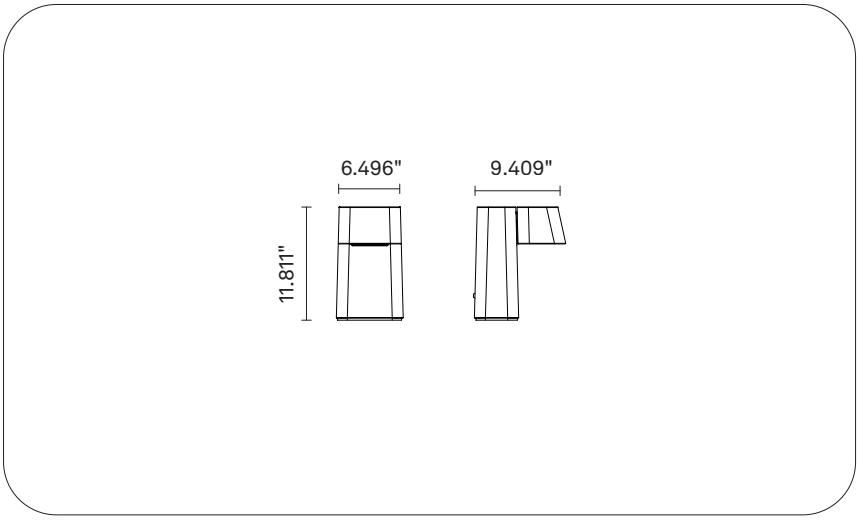

ORDERING INFORMATION / GUIDE

Example: **BR2960007-U-D20-830-L010-SP-V0-F02-MU-CG0**

OPTICS	RA+K	LUMINOUS FLUX	LENS	VOLTAGE	DRIVER FUNCTION	ISO CLASS	FINISH
D20 T2 short	**830** Ra80 3000 K	**L010** 1000 lm	**SP** Prismatic	**V0** 120V-277V	**F02** 1-10V+CLO	**MU** UL	**CG0** Grey [RAL 9006] Matt
	840 Ra80 4000 K						

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Illustrative visualization.

SOURCE
High-power LED matrix.

Energy-efficiency class: E
LED forward current: 450 mA
Power rating: 13 W
Nominal Flux: 966-1036 lm
Nominal CCT (Color temperature): 3000 K, 4000 K
Color Rendering Index (Ra): 80
Standard Deviation Colour Matching: ≤3
Rated lifetime: L90 = 100000 h (Ts = 85 °C, 700 mA)

LIGHTING CHARACTERISTICS
Modular 2x2 refractive lenses in PMMA.

Optical efficiency: LOR = 100% ULOR = 0%
LED quantity: 2
Cutoff Angle: Semi Cutoff C = 45° γ = 32°
Luminous flux: 966-1036 lm
Luminous efficacy: 74-80 lm/W
BUG: B=0, U=0, G=1
Photobiological safety: RG1 - Low risk


ELECTRICAL CHARACTERISTICS
Luminaire power: 13 W
Voltage: 120V-277V~ 50/60Hz
Power factor: ≥0.99
Ambient temperature: -31 °F / +122 °F

Driver included: No
Surge protection: 2kV CM - 2kV DM

MECHANICAL CHARACTERISTICS
Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.
NeriConcrete is a flexible paste made by mixing cement powders and components, polymer fibers, colored pigments, and water, adaptable to any mold.
Protective shield in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.
The surface treatment makes the material water-repellent and stain-resistant.

Length: 9.409 in
Width: 6.496 in
Height: 11.811 in
Weight: 24.25 lb
EPA: 0.54 ft²
Protection degree: IP43
Mechanical resistance: IK08

WARNINGS
Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.

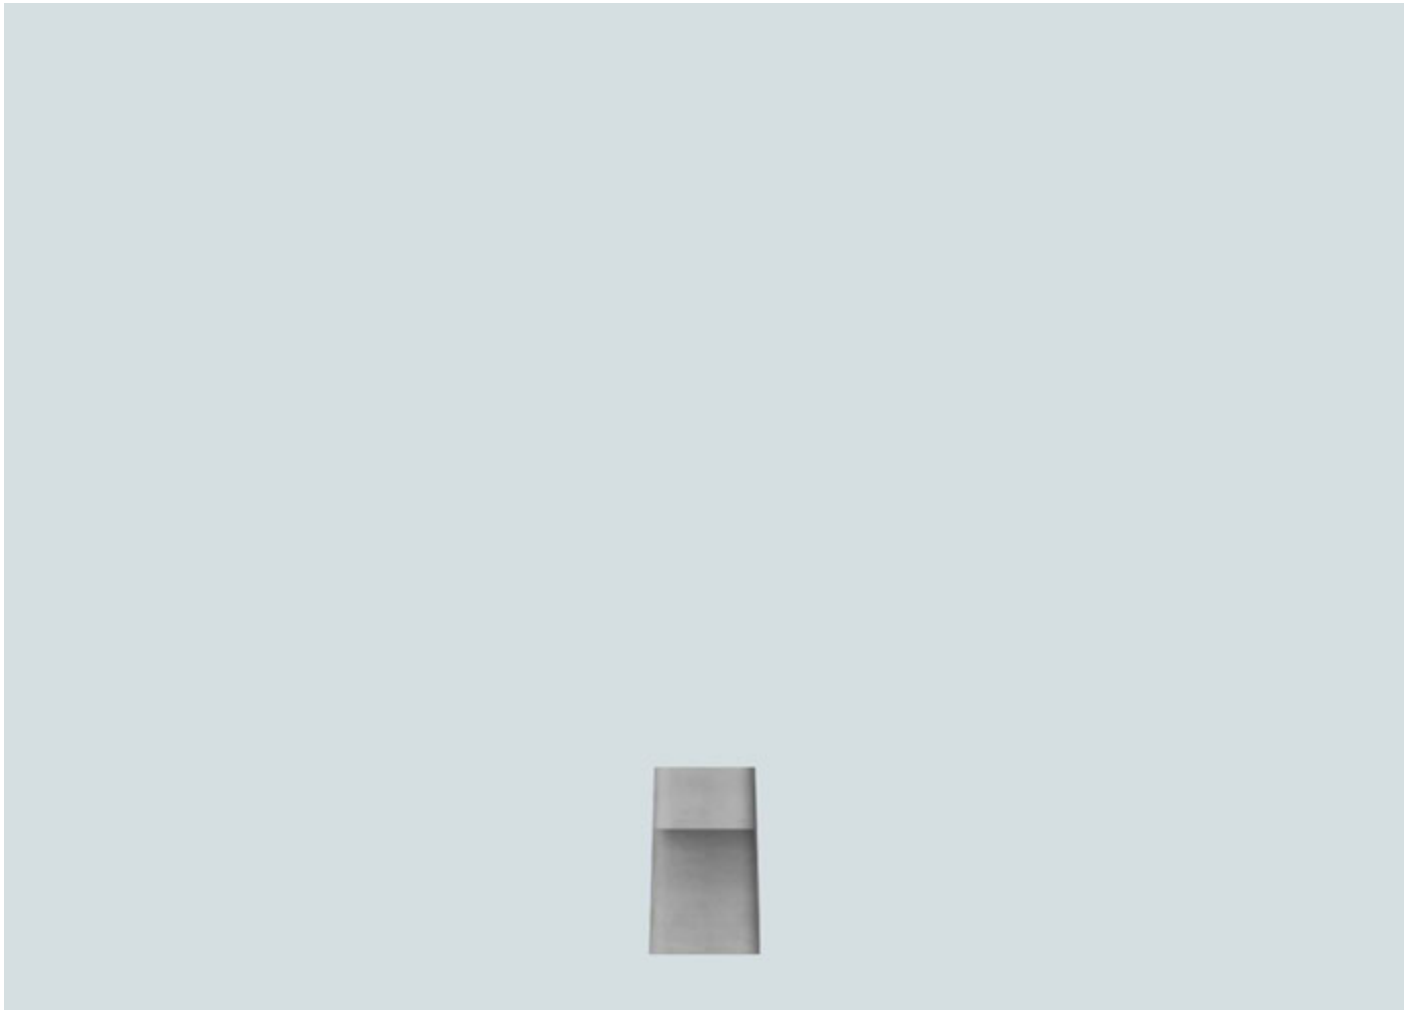




Posts, Tops, Brackets, Chandeliers

Alcor	278	
Alkes	281	
Antares	282	Quick Ship Program
Castore	284	
Chara	285	
Flush	286	
Heka	288	
Kuma	289	
Lyra	291	Quick Ship Program
Maia	293	
Matar	296	
Mizar	298	
Nebula	299	UPDATE
Nebula Essential	303	NEW
Nova	307	Quick Ship Program
Propus	308	
Saiph	309	
Sheliak	310	
Tabit	317	

Poles

POLES

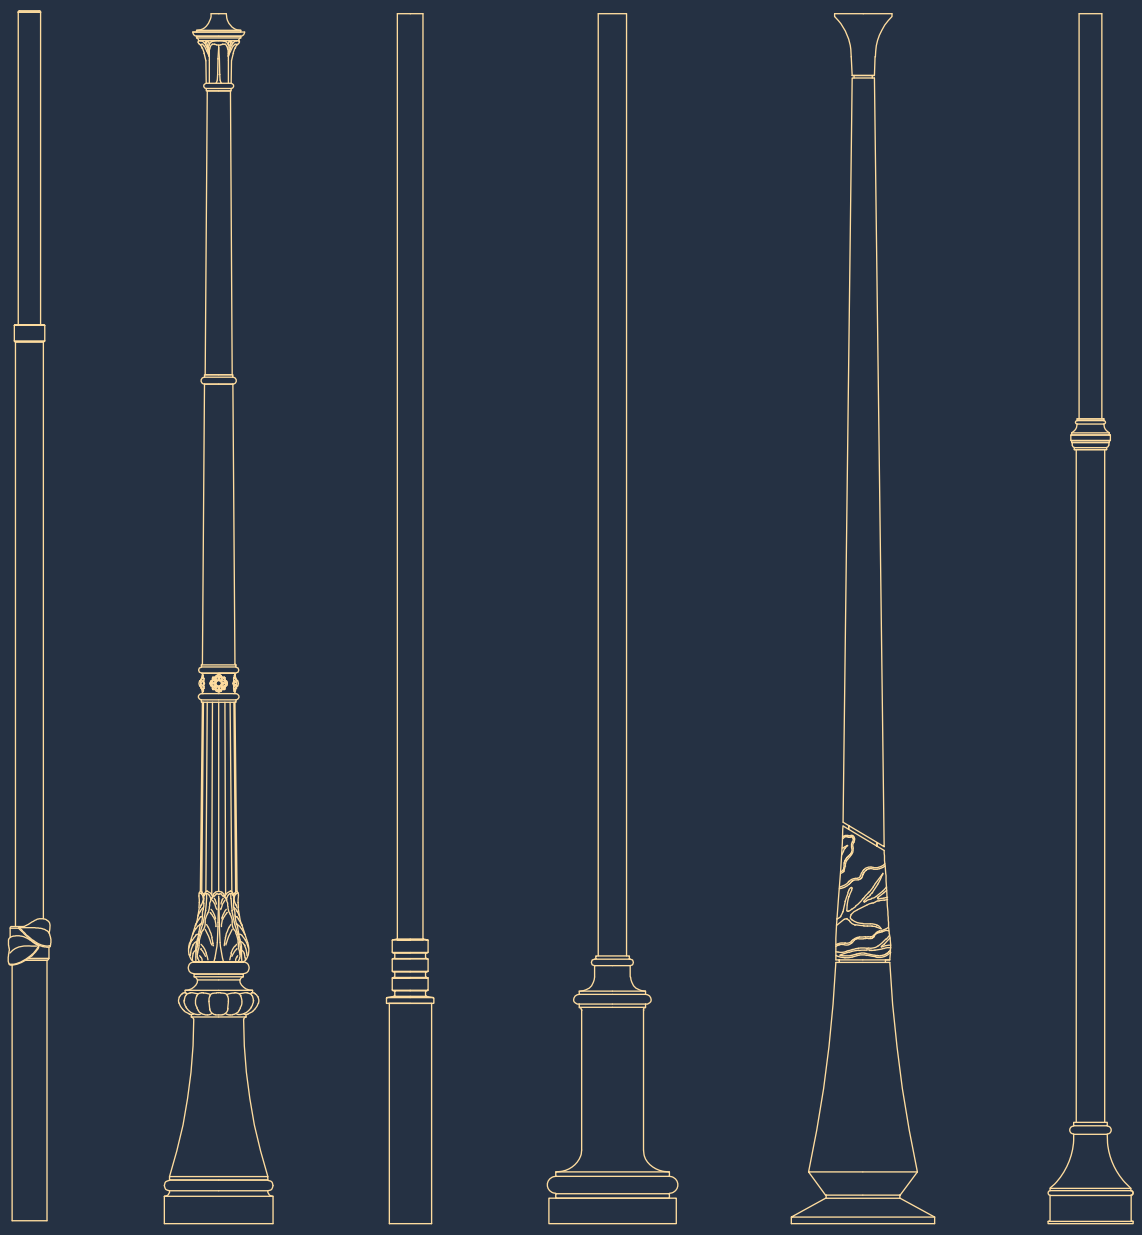

The pole is the structural element that defines the aesthetics of the urban landscape. Crafted from cast iron, steel, or aluminum, our supports combine the durability of traditional materials with designs ranging from classic, ornate lines to contemporary styles, ensuring seamless integration into any architectural setting.

Alcor | Pole | Cast iron + Steel | Large | Max 1 light source



MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561, spheroidal graphite cast iron UNI EN 1563 and steel, with internal core in S355 UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **AL8156000-N-BF-EPD-GF1-HC0387-ZD140060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GF1** Post top | Max 1 light source	**HC0387** 152.362 in	**ZD140060** Base 5.512 - Top 2.362 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Alcor | Pole | Cast iron + Steel | Small | Max 2 light sources



MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561, spheroidal graphite cast iron UNI EN 1563 and steel, with internal core in S355 UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **AL8102000-N-BF-EPD-GE2-HC0228-ZD102060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GE2** Suspended swan neck | Max 2 light sources	**HC0228** 89.764 in	**ZD102060** Base 4.016 - Top 2.362 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Alcor | Pole | Cast iron + Steel | Large | Max 2 light sources



MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561, spheroidal graphite cast iron UNI EN 1563 and steel, with internal core in S355 UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE


Example: **AL8157000-N-BF-EPD-GE2-HC0448-ZD140060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GE2** Suspended swan neck | Max 2 light sources	**HC0448** 176.378 in	**ZD140060** Base 5.512 - Top 2.362 in	**CN0** Grey [Neri] Textured
			HC0490 192.913 in		
			HC0550 216.536 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Alkes | Pole | Steel | Arch pole for roundabouts | Max 1 light source

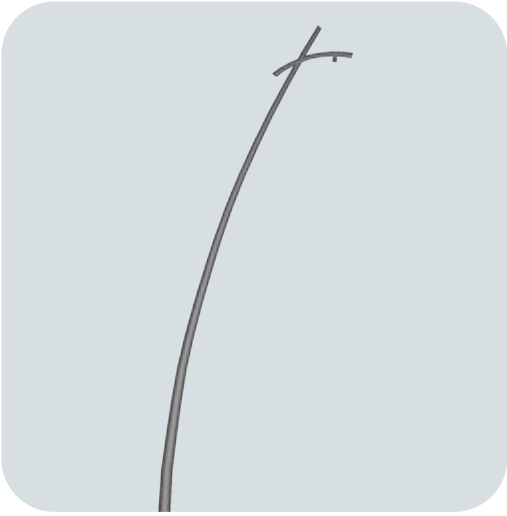

MECHANICAL CHARACTERISTICS

Lighting pole in S235 UNI EN 10025, with longitudinal weld ground smooth, hot-dip galvanized in accordance with UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **AL0001209-N-BF-EPC-GG1-HC0575-ZD114060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPC** Conical	**GG1** Suspended post top | Max 1 light source	**HC0575** 226.378 in	**ZD114060** Base 4.488 - Top 2.362 in	**CN0** Grey [Neri] Textured
			HC0800 314.961 in	**ZD144060** Base 5.669 - Top 2.362 in	
			HC0900 354.331 in	**ZD154060** Base 6.063 - Top 2.362 in	

CONFIGURATION NOTES


The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Antares | Pole | Aluminum | Round straight | Max 1 light source

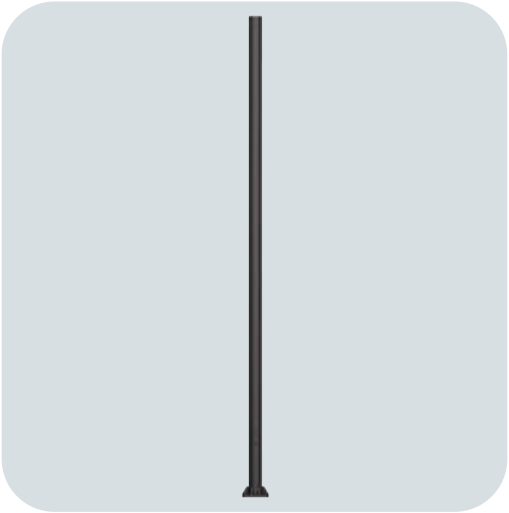

MECHANICAL CHARACTERISTICS

Circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, complete with pole-top attachment, inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

ORDERING INFORMATION / GUIDE

Example: **ANLPSB-U-BF-EPF-GX1-HC0366-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX1** Max 1 light source	**HC0366** 144.016 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0457 180 in	**ZD114114** Base 4.488 - Top 4.488 in	
			HC0549 215.984 in	**ZD127127** Base 5 - Top 5 in	
			HC0640 252.008 in		
			HC0732 287.992 in		

CONFIGURATION NOTES


The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Antares | Pole | Aluminum | Round step | Max 1 light source

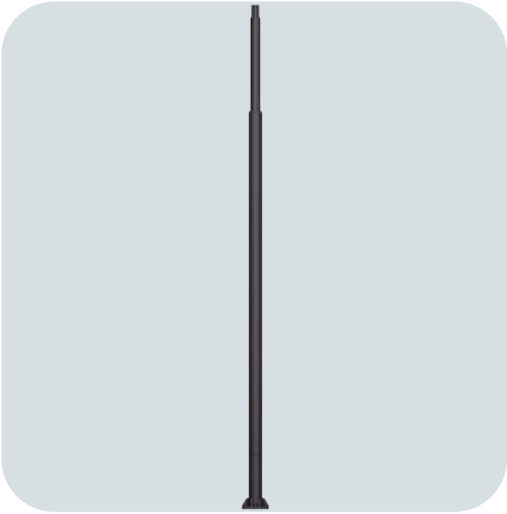

MECHANICAL CHARACTERISTICS

Round step circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, equipped with a top tenon, slot with inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

ORDERING INFORMATION / GUIDE

Example: **ANPORS-U-BF-EPR-GX1-HC0366-ZD102076-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GX1** Max 1 light source	**HC0366** 144.016 in	**ZD102076** Base 4.016 - Top 2.992 in	**CN0** Grey [Neri] Textured
			HC0457 180 in	**ZD114076** Base 4.488 - Top 2.992 in	
			HC0549 215.984 in	**ZD127076** Base 5 - Top 2.992 in	
			HC0640 252.008 in	**ZD152114** Base 5.984 - Top 4.488 in	
			HC0732 287.992 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Castore | Pole | Cast iron + Steel | Small | Max 3 light sources



MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal core in S355 UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **CA1161000-N-BF-EPD-GE2-HC0423-ZD114060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GC3** Bracket post top entry | Max 3 light sources	**HC0374** 147.244 in	**ZD114060** Base 4.488 - Top 2.362 in	**CN0** Grey [Neri] Textured
		GE2 Suspended swan neck | Max 2 light sources	**HC0423** 166.536 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Chara | Pole | Steel | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS

Pole in S355 UNI EN 10219-1, pickled steel sheet and cast iron UNI EN 1561, all hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE


Example: **CH8300000-N-BF-EPR-GD2-HC0623-ZD140102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GD2** Suspended bracket | Max 2 light sources	**HC0623** 245.276 in	**ZD140102** Base 5.512 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0723 284.646 in		
			HC0823 324.016 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Flush | Pole | Steel | Round straight | Max 3 light sources

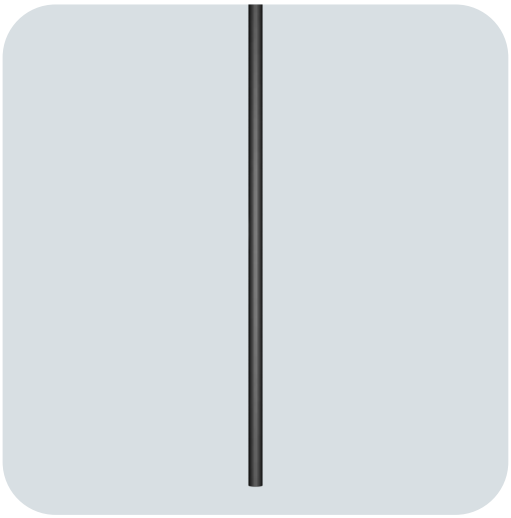

MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **FL1119000-N-BF-EPF-GF2-HC0410-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GF2** Post top | Max 2 light sources	**HC0410** 161.417 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0510 200.788 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Flush | Pole | Steel | Round step | Max 3 light sources



MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **FL1119205-N-BF-EPR-GF2-HC0610-ZD127102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GF2** Post top | Max 2 light sources	**HC0410** 161.417 in	**ZD102076** Base 4.016 - Top 2.992 in	**CN0** Grey [Neri] Textured
			HC0510 200.788 in	**ZD102089** Base 4.016 - Top 3.504 in	
			HC0610 240.158 in	**ZD127102** Base 5 - Top 4.016 in	
			HC0710 279.528 in		
			HC0810 318.898 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Heka | Pole | Cast iron + Steel | Simple | Max 4 light sources



MECHANICAL CHARACTERISTICS
Pole in cast iron UNI EN 1561 and steel UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **HE1305000-N-BF-EPR-GA4-HC0540-ZD152102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GA1** Bracket | Suspended swan neck | Max 1 light source	**HC0540** 212.599 in	**ZD152102** Base 5.984 - Top 4.016 in	**CN0** Grey [Neri] Textured
		GA4 Bracket | Suspended swan neck | Max 4 light sources	**HC0640** 252.008 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Pole | Cast iron + Steel | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS

Pole in cast iron UNI EN 1561 and steel UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **KU1300000-N-BF-EPR-GA2-HC0370-ZD152089-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GA1** Bracket | Suspended swan neck | Max 1 light source	**HC0370** 145.669 in	**ZD152089** Base 5.984 - Top 3.504 in	**CN0** Grey [Neri] Textured
		GA2 Bracket | Suspended swan neck | Max 2 light sources	**HC0470** 185.039 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Pole | Cast iron + Steel | Simple | Max 4 light sources



MECHANICAL CHARACTERISTICS
Pole in cast iron UNI EN 1561 and steel UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE


Example: **KU1315000-N-BF-EPR-GA4-HC0540-ZD127102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GA1** Bracket | Suspended swan neck | Max 1 light source	**HC0540** 212.599 in	**ZD127102** Base 5 - Top 4.016 in	**CN0** Grey [Neri] Textured
		GA4 Bracket | Suspended swan neck | Max 4 light sources	**HC0640** 252.008 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Lyra | Pole | Aluminum | Round step | Max 1 light source

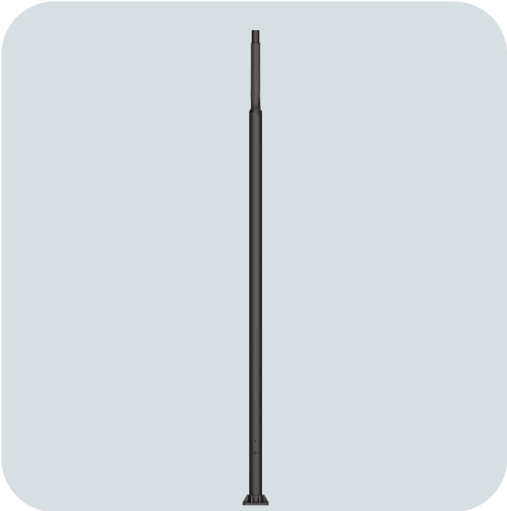

MECHANICAL CHARACTERISTICS

Circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, complete with welded top arm with plastic terminal, inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

ORDERING INFORMATION / GUIDE

Example: **LYLPRS-U-BF-EPR-GX1-HC0366-ZD102076-CN0**


GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GX1** Max 1 light source	**HC0366** 144.016 in	**ZD102076** Base 4.016 - Top 2.992 in	**CN0** Grey [Neri] Textured
			HC0457 180 in		

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Lyra | Pole | Aluminum | Round straight | Max 1 light source

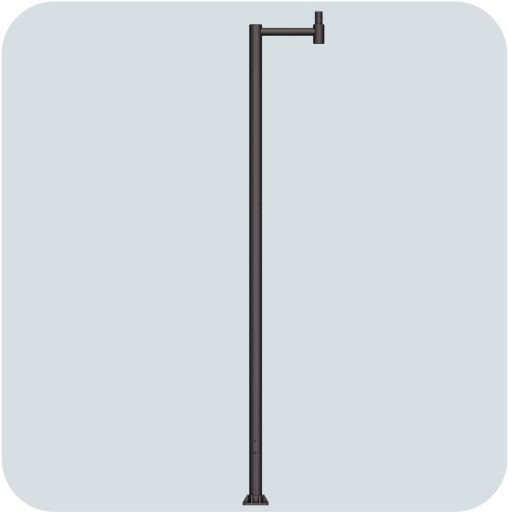

MECHANICAL CHARACTERISTICS

Round step circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, complete with top tenon, inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

ORDERING INFORMATION / GUIDE

Example: **LYLPRSSB-U-BF-EPR-GX2-HC0366-ZD102076-CN0**


GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GX2** Max 2 light sources	**HC0366** 144.016 in	**ZD102076** Base 4.016 - Top 2.992 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Maia | Pole | Cast iron + Steel | Simple | Small | Max 2 light sources

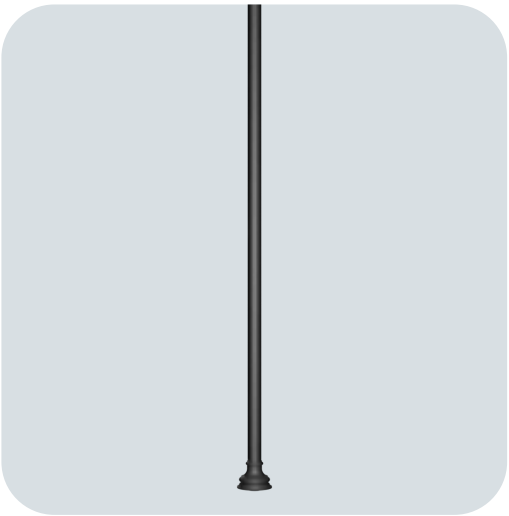

MECHANICAL CHARACTERISTICS

Pole in cast iron UNI EN 1561 and steel UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **MA1303000-N-BF-EPF-GA2-HC0370-ZD089089-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GA1** Bracket | Suspended swan neck | Max 1 light source	**HC0370** 145.669 in	**ZD089089** Base 3.504 - Top 3.504 in	**CN0** Grey [Neri] Textured
		GA2 Bracket | Suspended swan neck | Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Maia | Pole | Cast iron + Steel | Round step | Max 2 light sources



MECHANICAL CHARACTERISTICS
Pole in cast iron UNI EN 1561 and steel UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **MA1307000-N-BF-EPR-GA2-HC0370-ZD102089-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GA1** Bracket | Suspended swan neck | Max 1 light source	**HC0370** 145.669 in	**ZD102089** Base 4.016 - Top 3.504 in	**CN0** Grey [Neri] Textured
		GA2 Bracket | Suspended swan neck | Max 2 light sources	**HC0470** 185.039 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Maia | Pole | Cast iron + Steel | Simple | Large | Max 4 light sources



MECHANICAL CHARACTERISTICS

Pole in cast iron UNI EN 1561 and steel UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **MA1362000-N-BF-EPR-GA4-HC0540-ZD127102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GA1** Bracket | Suspended swan neck | Max 1 light source	**HC0540** 212.599 in	**ZD127102** Base 5 - Top 4.016 in	**CN0** Grey [Neri] Textured
		GA4 Bracket | Suspended swan neck | Max 4 light sources	**HC0640** 252.008 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Matar | Pole | Steel + Aluminium | Round step | Max 2 light sources



MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219 and aluminum casting EN 1706 AC-46100KF, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **MA1113000-N-BF-EPR-GD2-HC0500-ZD140089-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GD2** Suspended bracket | Max 2 light sources	**HC0500** 196.851 in	**ZD140089** Base 5.512 - Top 3.504 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD159089** Base 6.26 - Top 3.504 in	
			HC0700 275.591 in	**ZD168089** Base 6.614 - Top 3.504 in	
			HC0800 314.961 in		
			HC0900 354.331 in		
			HC1000 393.701 in		

CONFIGURATION NOTES


The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Matar | Pole | Steel + Aluminium | Simple | Max 2 light sources

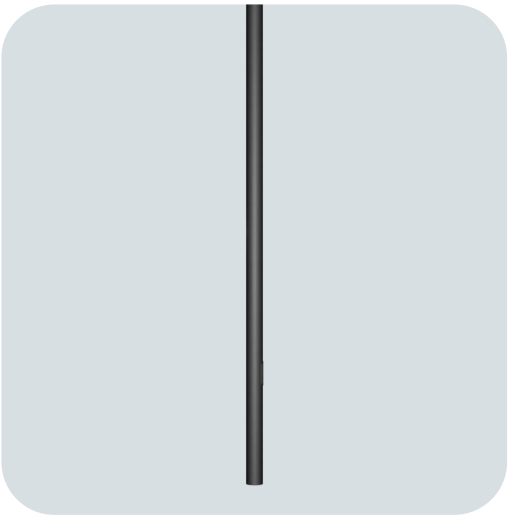

MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219 and aluminum casting EN 1706 AC-46100KF, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **MA1121000-N-BF-EPR-GD2-HC0600-ZD127089-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GD1** Suspended bracket | Max 1 light source	**HC0600** 236.221 in	**ZD127089** Base 5 - Top 3.504 in	**CN0** Grey [Neri] Textured
		GD2 Suspended bracket | Max 2 light sources	**HC0700** 275.591 in	**ZD140089** Base 5.512 - Top 3.504 in	
			HC0800 314.961 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Mizar | Pole | Cast iron + Steel | Conical | Max 2 light sources



MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219 and cast iron UNI EN 1561, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **MZ1410000-N-BF-EPR-GA2-HC0380-ZD127102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GA1** Bracket | Suspended swan neck | Max 1 light source	**HC0380** 149.606 in	**ZD127102** Base 5 - Top 4.016 in	**CN0** Grey [Neri] Textured
		GA2 Bracket | Suspended swan neck | Max 2 light sources	**HC0480** 188.976 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula | Pole | 1 light source



MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBA-N-BF-EPF-GX1-HC0510-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX1** Max 1 light source	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula | Pole | 2 light sources



MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBB-N-BF-EPF-GX2-HC0510-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX2** Max 2 light sources	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula | Pole | 2 staggered light sources



MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBC-N-BF-EPF-GX2-HC0510-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX2** Max 2 light sources	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula | Pole | 3 staggered light sources



MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBD-N-BF-EPF-GX3-HC0510-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX3** Max 3 light sources	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula Essential | Pole | 1 light source



MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBEA-N-BF-EPF-GX1-HC0510-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX1** Max 1 light source	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula Essential | Pole | 2 light sources



MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBEB-N-BF-EPF-GX2-HC0510-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX2** Max 2 light sources	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula Essential | Pole | 2 staggered light sources



MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBEC-N-BF-EPF-GX2-HC0510-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX2** Max 2 light sources	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nebula Essential | Pole | 3 staggered light sources



MECHANICAL CHARACTERISTICS
Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PONEBED-N-BF-EPF-GX3-HC0510-ZD102102-CN0**


GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX3** Max 3 light sources	**HC0510** 200.788 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
			HC0600 236.221 in	**ZD152152** Base 5.984 - Top 5.984 in	
			HC0690 271.654 in		
			HC0780 307.087 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nova | Pole | Aluminum | Round straight | Max 2 light sources

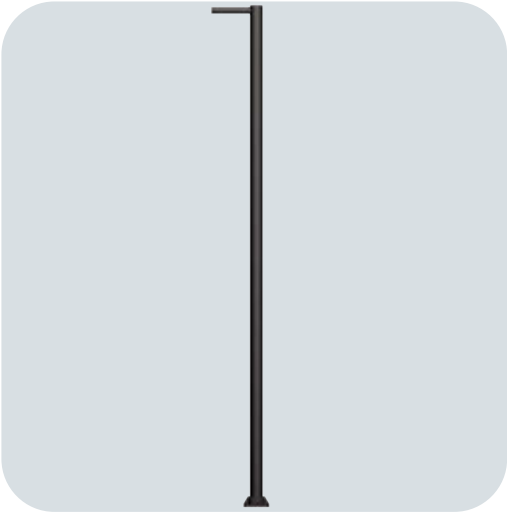

MECHANICAL CHARACTERISTICS

Circular-section aluminum lighting pole made of 6061-T6 aluminum (ASTM B221-20) and 356-T6 aluminum casting, complete with horizontal top arm for side-mounted fixture with plastic terminal, inspection door, base flange and hot-dip galvanized steel anchor bolts (ASTM F1554-55).

ORDERING INFORMATION / GUIDE

Example: **NORTSB-U-BF-EPF-GX2-HC0396-ZD102102-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPF** Cylindrical	**GX1** Max 1 light source	**HC0396** 155.984 in	**ZD102102** Base 4.016 - Top 4.016 in	**CN0** Grey [Neri] Textured
		GX2 Max 2 light sources	**HC0488** 192.008 in	**ZD114114** Base 4.488 - Top 4.488 in	
			HC0579 227.992 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Propus | Pole | Steel | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219, cast iron UNI EN-GJL-HB175 and aluminum casting EN 1706 AC-46100KF, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **PR1114000-N-BF-EPR-GD2-HC0600-ZD159089-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GD2** Suspended bracket | Max 2 light sources	**HC0600** 236.221 in	**ZD159089** Base 6.26 - Top 3.504 in	**CN0** Grey [Neri] Textured
			HC0700 275.591 in	**ZD168089** Base 6.614 - Top 3.504 in	
			HC0800 314.961 in		
			HC0900 354.331 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Saiph | Pole | Steel + Aluminium | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS

Pole in aluminum casting UNI EN 1706 and S235 UNI EN 10025, hot-dip galvanized in accordance with UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE


Example: **SA8201000-N-BF-EPR-GB2-HC0660-ZD168127-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GB2** Lateral bracket | Max 2 light sources	**HC0660** 259.843 in	**ZD168127** Base 6.614 - Top 5 in	**CN0** Grey [Neri] Textured
			HC0760 299.213 in		
			HC0860 338.583 in		
			HC0960 377.953 in		

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Pole | Cast iron | Small | Max 3 light sources

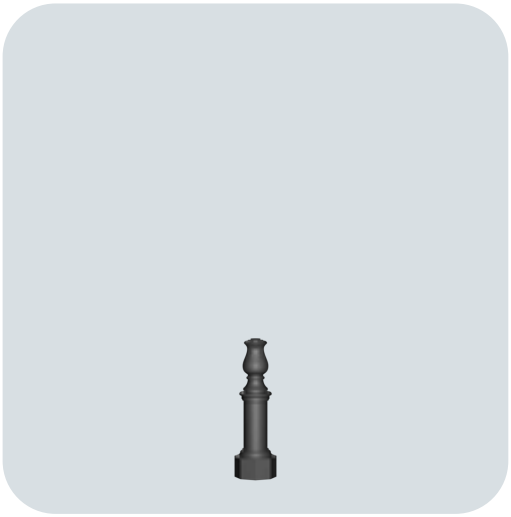

MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **SH1141000-N-BF-EPR-GE2-HC0275-ZD114060-CN0**


GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GC3** Bracket post top entry | Max 3 light sources	**HC0228** 89.764 in	**ZD114060** Base 4.488 - Top 2.362 in	**CN0** Grey [Neri] Textured
		GE2 Suspended swan neck | Max 2 light sources	**HC0275** 108.268 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Pole | Cast iron | Small | Max 3 light sources

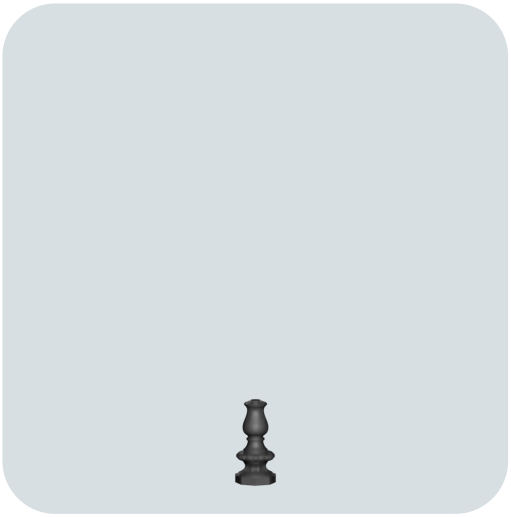

MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **SH1142000-N-BF-EPR-GE2-HC0236-ZD114060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GC3** Bracket post top entry | Max 3 light sources	**HC0187** 73.622 in	**ZD114060** Base 4.488 - Top 2.362 in	**CN0** Grey [Neri] Textured
		GE2 Suspended swan neck | Max 2 light sources	**HC0236** 92.913 in		

CONFIGURATION NOTES


The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Pole | Cast iron | Small | Max 3 light sources

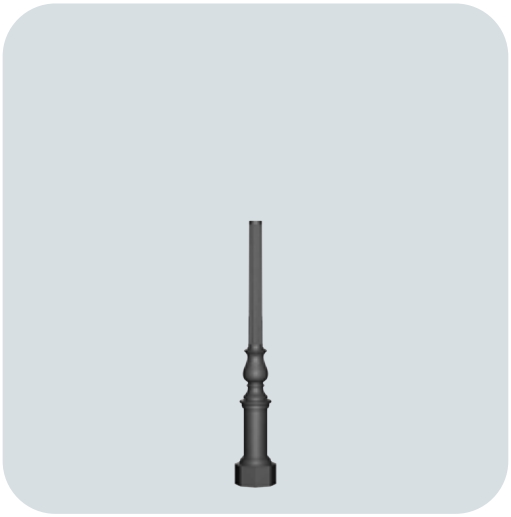

MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **SH1151000-N-BF-EPD-GE2-HC0367-ZD114060-CN0**


GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GC3** Bracket post top entry | Max 3 light sources	**HC0318** 125.197 in	**ZD114060** Base 4.488 - Top 2.362 in	**CN0** Grey [Neri] Textured
		GE2 Suspended swan neck | Max 2 light sources	**HC0367** 144.488 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Pole | Cast iron | Small | Max 3 light sources

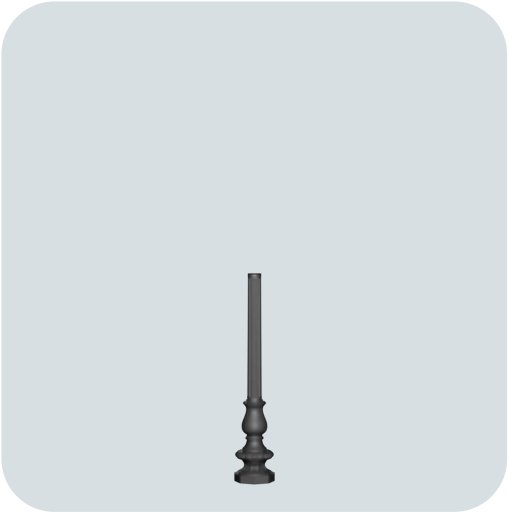

MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core
UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **SH1152000-N-BM-EPD-GE2-HC0328-ZD114060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BM Buried root	**EPD** Decorated	**GC3** Bracket post top entry | Max 3 light sources	**HC0279** 109.843 in	**ZD114060** Base 4.488 - Top 2.362 in	**CN0** Grey [Neri] Textured
BF Flanged		**GE2** Suspended swan neck | Max 2 light sources	**HC0328** 129.134 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Pole | Cast iron | Small | Max 3 light sources



MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461. CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **SH1191000-N-BF-EPD-GC3-HC0343-ZD114060-CN0**


GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GC3** Bracket post top entry | Max 3 light sources	**HC0343** 135.039 in	**ZD114060** Base 4.488 - Top 2.362 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Pole | Cast iron | Medium | Max 3 light sources

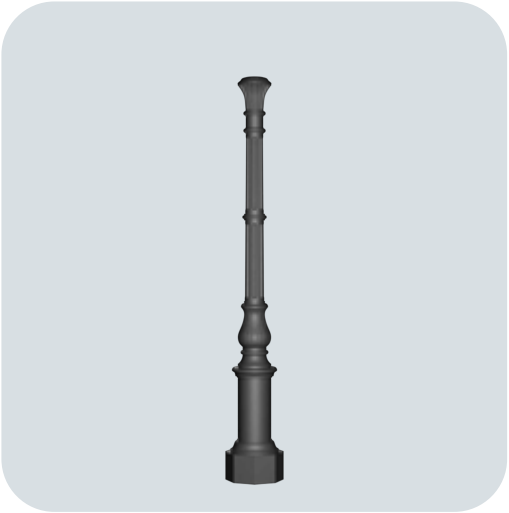

MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **SH1200000-N-BF-EPD-GE1-HC0485-ZD133060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GE1** Suspended swan neck | Max 1 light source	**HC0485** 190.945 in	**ZD133060** Base 5.236 - Top 2.362 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Pole | Cast iron + Steel | Large | Max 4 light sources



MECHANICAL CHARACTERISTICS

Modular pole made of cast iron UNI EN 1561 with internal steel core UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461. CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **SH1351000-N-BF-EPR-GE4-HC0640-ZD168114-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPR** Tapered	**GE1** Suspended swan neck | Max 1 light source	**HC0640** 252.008 in	**ZD168114** Base 6.614 - Top 4.488 in	**CN0** Grey [Neri] Textured
		GE4 Suspended swan neck | Max 4 light sources	**HC0740** 291.339 in		

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Tabit | Pole | Cast iron + Steel | Small | Max 1 light source



MECHANICAL CHARACTERISTICS

Modular post in UNI EN 1561 cast iron with core in S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **TA8003000-N-BF-EPD-GF1-HC0257-ZD133042-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GF1** Post top | Max 1 light source	**HC0257** 101.181 in	**ZD133042** Base 5.236 - Top 1.654 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Tabit | Pole | Cast iron + Steel | Large | Max 1 light source



MECHANICAL CHARACTERISTICS

Modular post in UNI EN 1561 cast iron with core in S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.
CE-certified pole, compliant with standard UNI EN 40-5.

ORDERING INFORMATION / GUIDE

Example: **TA8006000-N-BF-EPD-GF1-HC0335-ZD133042-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BF Flanged	**EPD** Decorated	**GF1** Post top | Max 1 light source	**HC0335** 131.89 in	**ZD133042** Base 5.236 - Top 1.654 in	**CN0** Grey [Neri] Textured
			HC0440 173.228 in		


ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Alcor	322	
Antares	323	Quick Ship Program
Castore	324	
Chara	325	
4100.050	327	
4101.100	328	
4100.160.500	329	
4006.330	330	
Flush	331	
Heka	332	
Kuma	333	
Lyra	337	Quick Ship Program
Maia	338	
Mizar	340	
Nova M	343	
Propus	345	
Saiph	347	
Sheliak	348	

Tops

TOPS

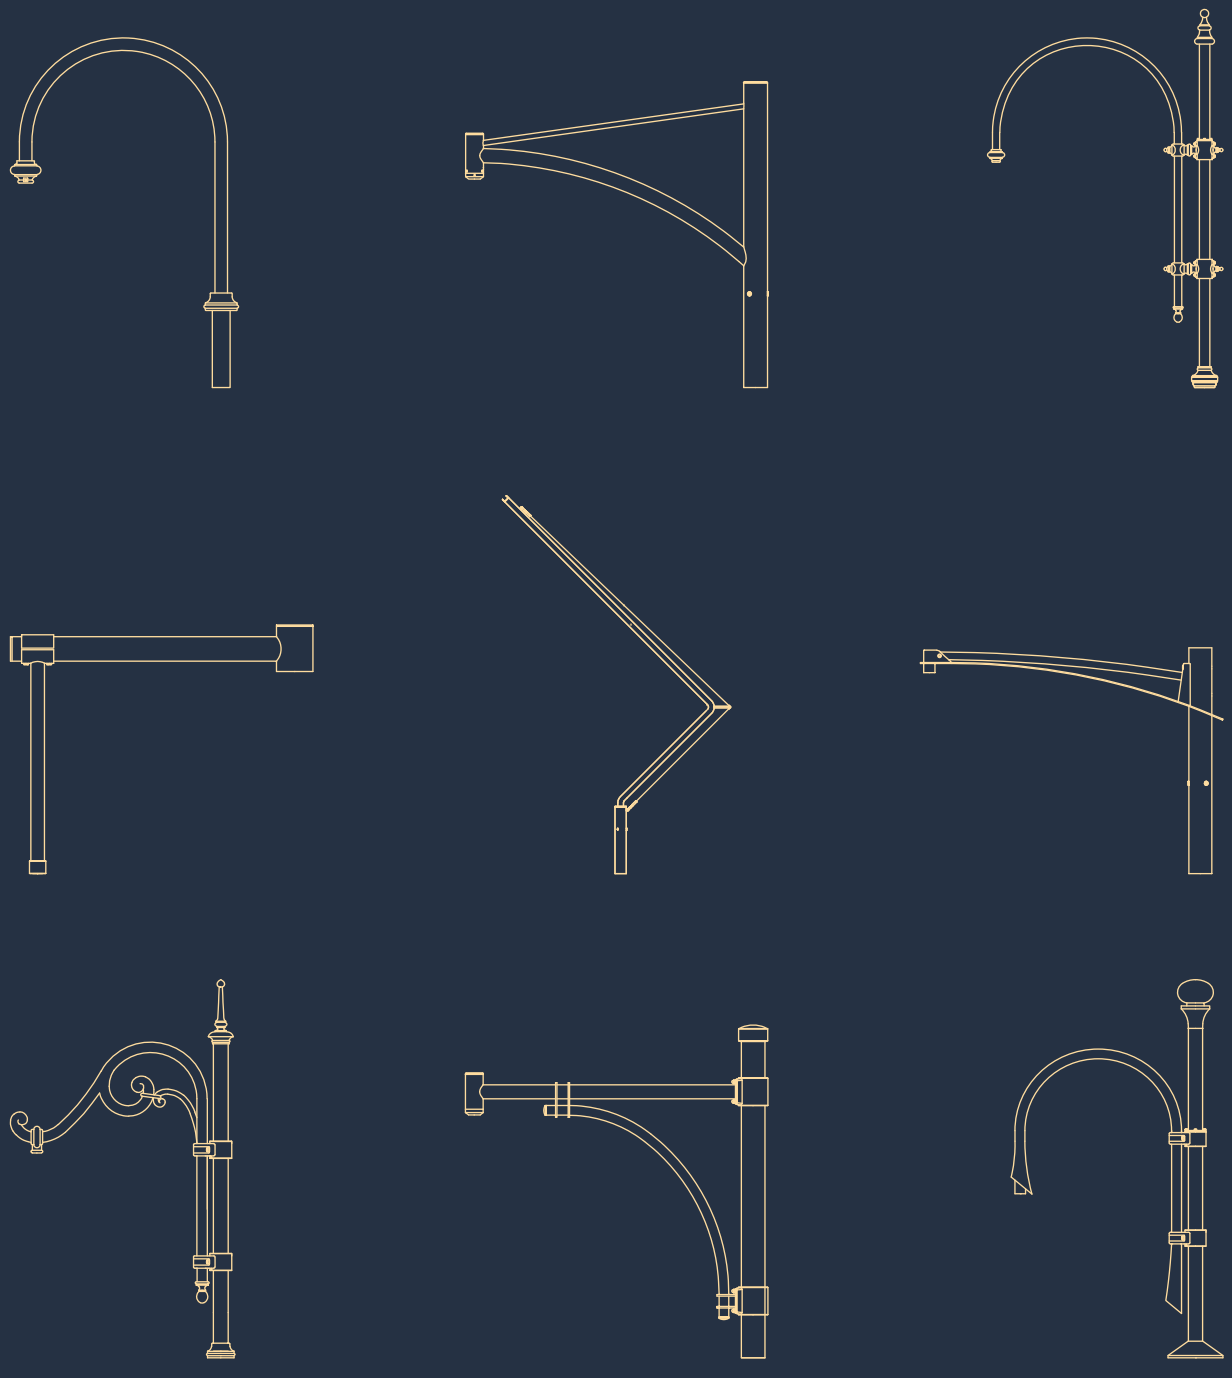

Pole tops represent the aesthetic and functional extension of the pole, allowing for the installation of one or more lighting fixtures. Designed for a seamless visual integration, Neri pole tops offer versatile configurations-single, double, or multiple-transforming every light point into a distinctive landmark of the night landscape.

Alcor | Top | Cast iron + Steel | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS

The top section is made from elements in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **AL4102175-N-TS-ECS-P1-HM1630-ZS0760-CN0**


LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM1630** 64.173 in	**ZS0760** 29.921 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Antares | Top | Aluminum | Round straight | Max 2 light sources

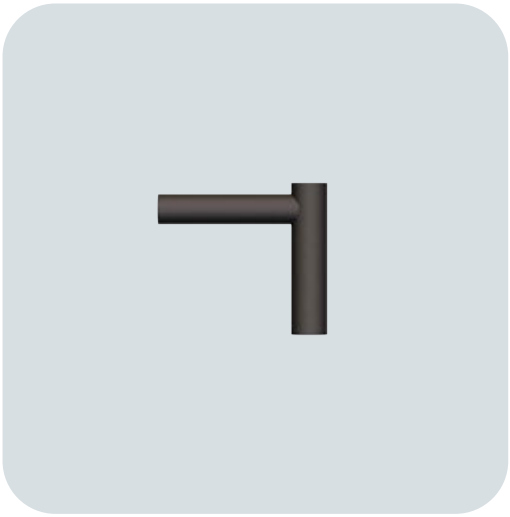

MECHANICAL CHARACTERISTICS

Pole top in welded 6061-T6 aluminum tubular sections, equipped with a slip-fit sleeve with stainless steel set screws positioned at 120°, horizontal support arm(s) and plastic top cap for inspection and cable routing.

ORDERING INFORMATION / GUIDE

Example: **ANTOSB-U-TP-ECS-P1-HM0305-ZS0305-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**P1** Max 1 light source	**HM0305** 12.008 in	**ZS0305** 12.008 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources	**HM0610** 24.016 in		

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Castore | Top | Cast iron + Steel | Decorated | Max 2 light sources



MECHANICAL CHARACTERISTICS

Top section made of cast iron elements in accordance with UNI EN 1561 and hot-dip galvanized S235 UNI EN 10219-1, galvanized in compliance with UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **CA4102178-N-TS-ECD-P1-HM3140-ZS0750-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECD** Decorated	**P1** Max 1 light source	**HM3140** 123.622 in	**ZS0750** 29.528 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Chara | Top | Steel | Simple | Max 1 light source



MECHANICAL CHARACTERISTICS
Intermediate top section formed by S235 UNI EN 10219-1 steel elements hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **CH4102007-N-TS-ECS-P1-HM0775-ZS0800-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0775** 30.512 in	**ZS0800** 31.496 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Chara | Top | Steel | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS
Top section formed by S235 UNI EN 10219-1 steel elements hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE


Example: **CH4102001-N-TS-ECS-P1-HM0775-ZS0800-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0775** 30.512 in	**ZS0800** 31.496 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

4100.050 | Top | Cast iron | Simple | Max 1 light source

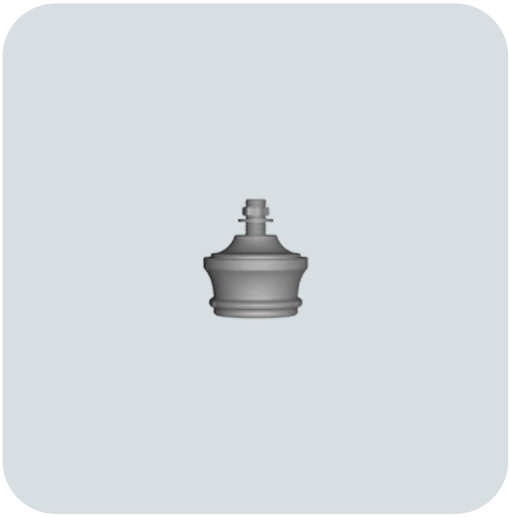

MECHANICAL CHARACTERISTICS

The top section is made in UNI EN 1561 cast iron and FE 360 steel compliant with UNI EN 10219-1, galvanized to UNI ISO 2081 standards.

ORDERING INFORMATION / GUIDE

Example: **TP4100050-N-TP-ECS-P1-HM0100-ZS0000-CN0**


LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**P1** Max 1 light source	**HM0100** 3.937 in	**ZS0000** 0 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

4101.100 | Top | Cast iron + Steel | Decorated | Max 1 light source

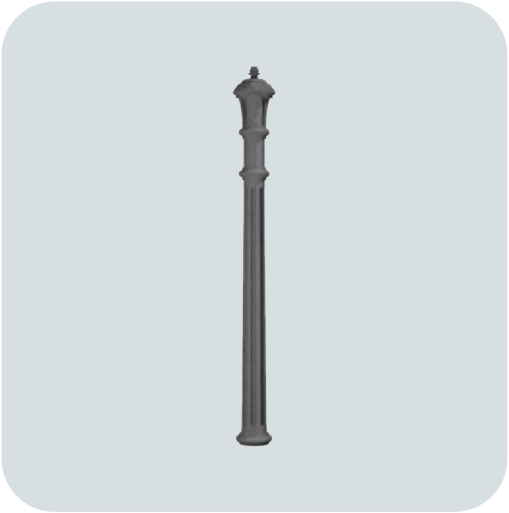

MECHANICAL CHARACTERISTICS
The top section is made in UNI EN 1561 cast iron and FE 360 steel compliant with UNI EN 10219-1, galvanized to UNI ISO 2081 standards.

ORDERING INFORMATION / GUIDE


Example: **TP4101100-N-TP-ECD-P1-HM1340-ZS0000-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**P1** Max 1 light source	**HM1340** 52.756 in	**ZS0000** 0 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

4100.160.500 | Top | Cast iron + Steel | Simple | Max 1 light source

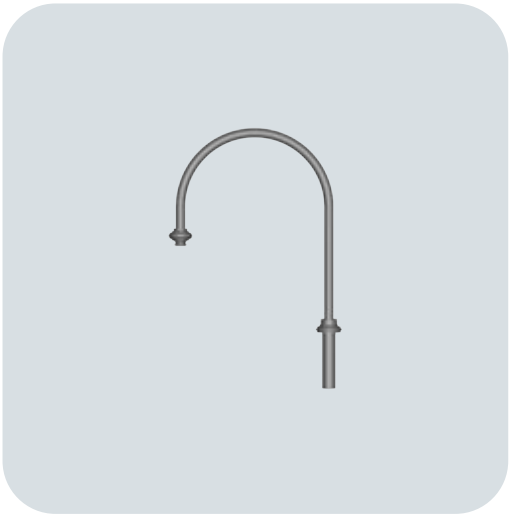

MECHANICAL CHARACTERISTICS
Top for poles made from ductile cast iron UNI EN 1563, S235 UNI EN 10219-1 hot-dip galvanized as per UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **PA4100160-N-TS-ECS-P1-HM0880-ZS0680-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0880** 34.646 in	**ZS0680** 26.772 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

4006.330 | Top | Aluminum | Simple | Max 1 light source



MECHANICAL CHARACTERISTICS
Pipe end cap made of cast aluminum.

ORDERING INFORMATION / GUIDE


Example: **TP4006330-N-TP-ECS-P1-HM0100-ZS0000-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**P1** Max 1 light source	**HM0100** 3.937 in	**ZS0000** 0 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Flush | Top | Steel | Simple | Max 2 light sources

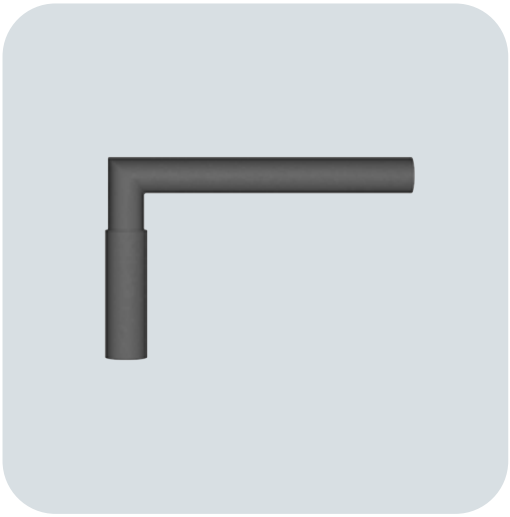

MECHANICAL CHARACTERISTICS
Top made of steel S235 UNI EN 10219-1, hot-dip galvanized in accordance with UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE


Example: **FL4102133-N-TS-ECS-P1-HM0330-ZS0500-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0330** 12.992 in	**ZS0500** 19.685 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Heka | Top | Cast iron + Steel | Simple | Max 2 light sources

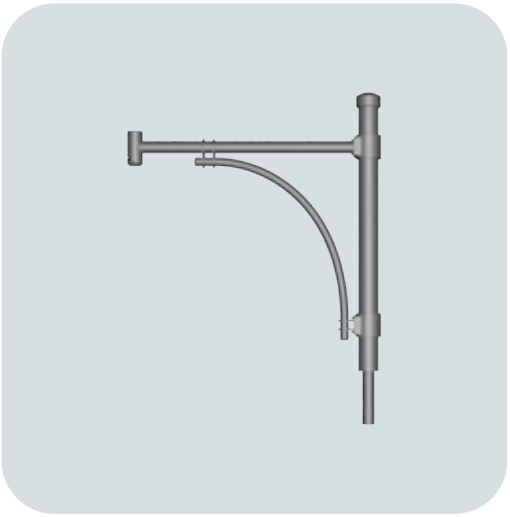

MECHANICAL CHARACTERISTICS
Cast iron post-top support in accordance with UNI EN 1561 and steel UNI EN 10219-1, hot-dip galvanized according to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE


Example: **HE4102120-N-TS-ECS-P1-HM1440-ZS1200-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM1440** 56.693 in	**ZS1200** 47.244 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Top | Steel | Simple | Max 1 light source

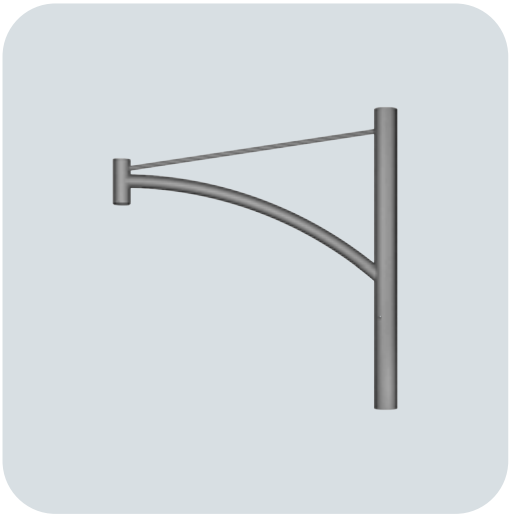

MECHANICAL CHARACTERISTICS
Top for poles made from ductile cast iron UNI EN 1563, S235 UNI EN 10219-1 hot-dip galvanized as per UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE


Example: **KU4105190-N-TS-ECS-P1-HM1305-ZS1290-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM1305** 51.378 in	**ZS1290** 50.787 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Top | Steel | Simple | Max 2 light sources

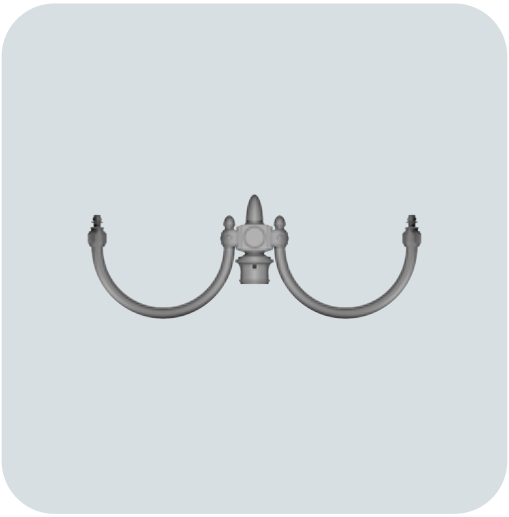

MECHANICAL CHARACTERISTICS
Top for poles made from ductile cast iron UNI EN 1563, S235 UNI EN 10219-1 hot-dip galvanized as per UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **KU4200250-N-TP-ECS-P2-HM0460-ZS0580-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**P2** Max 2 light sources	**HM0460** 18.11 in	**ZS0580** 22.835 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Top | Cast iron + Steel | Small - Swan neck | Max 2 light sources



MECHANICAL CHARACTERISTICS
Top for poles made from ductile cast iron UNI EN 1563, S235 UNI EN 10219-1 hot-dip galvanized as per UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE


Example: **KU4102170-N-TS-ECS-P1-HM1500-ZS0750-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM1500** 59.055 in	**ZS0750** 29.528 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Top | Cast iron + Steel | Large - Swan neck | Max 2 light sources

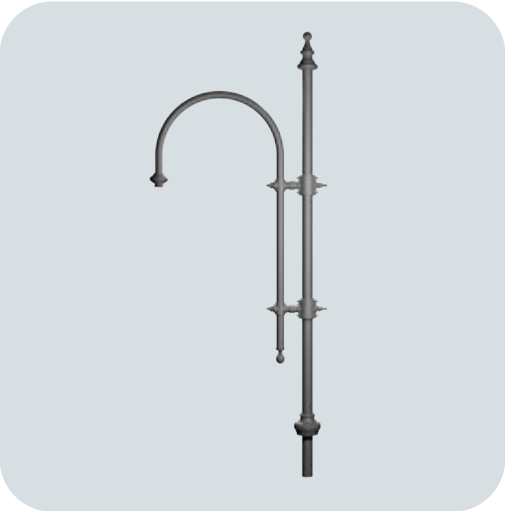

MECHANICAL CHARACTERISTICS
Top for poles made from ductile cast iron UNI EN 1563, S235 UNI EN 10219-1 hot-dip galvanized as per UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE


Example: **KU4102190-N-TS-ECS-P1-HM2120-ZS0930-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM2120** 83.465 in	**ZS0930** 36.614 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Lyra | Top | Aluminum | Round straight | Max 2 light sources

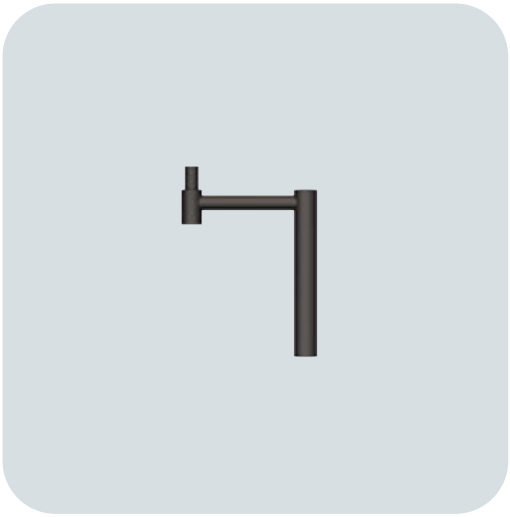

ORDERING INFORMATION / GUIDE

Example: **LYTOSB-U-TP-ECS-P1-HM0305-ZS0495-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**P1** Max 1 light source	**HM0305** 12.008 in	**ZS0495** 19.488 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources	**HM0610** 24.016 in	**ZS0991** 39.016 in	

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Maia | Top | Cast iron + Steel | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS
Made of UNI EN 1561 cast iron, UNI EN 1563 spheroidal cast iron and S235 UNI EN 10219-1 steel, hot-dip galvanised in accordance with UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE


Example: **MA4102140-N-TS-ECS-P1-HM1500-ZS0750-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM1500** 59.055 in	**ZS0750** 29.528 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Maia | Top | Cast iron + Steel | Simple | Max 4 light sources

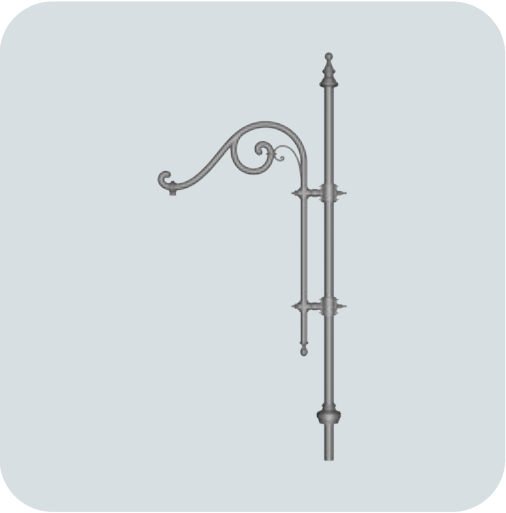

MECHANICAL CHARACTERISTICS
Made of UNI EN 1561 cast iron, UNI EN 1563 spheroidal cast iron and S235 UNI EN 10219-1 steel, hot-dip galvanised in accordance with UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE


Example: **MA4102115-N-TS-ECS-P1-HM2120-ZS0930-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM2120** 83.465 in	**ZS0930** 36.614 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			
		P3 Max 3 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Mizar | Top | Cast iron | Simple | Max 1 light source

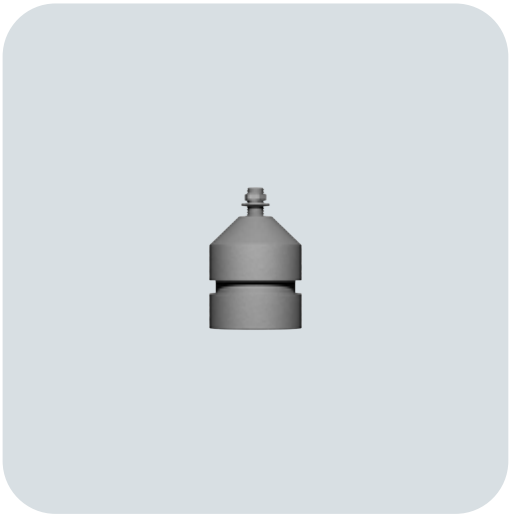

MECHANICAL CHARACTERISTICS
Made in EN-GJL HB175 cast iron and S235 UNI EN 10025 steel hot dip galvanized according to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **MZ4100020-N-TP-ECS-P1-HM0175-ZS0000-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**P1** Max 1 light source	**HM0175** 6.89 in	**ZS0000** 0 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Mizar | Top | Cast iron + Steel | Simple - Small | Max 2 light sources



MECHANICAL CHARACTERISTICS
Made in EN-GJL HB175 cast iron and S235 UNI EN 10025 steel hot dip galvanized according to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **MZ4100122-N-TS-ECS-P1-HM0740-ZS0700-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0740** 29.134 in	**ZS0700** 27.559 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Mizar | Top | Cast iron + Steel | Simple - Large | Max 2 light sources



MECHANICAL CHARACTERISTICS
Made in EN-GJL HB175 cast iron and S235 UNI EN 10025 steel hot dip galvanized according to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE


Example: **MZ4100125-N-TS-ECS-P1-HM0945-ZS1200-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0945** 37.205 in	**ZS1200** 47.244 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nova M | Top | Steel | Simple | Max 1 light source

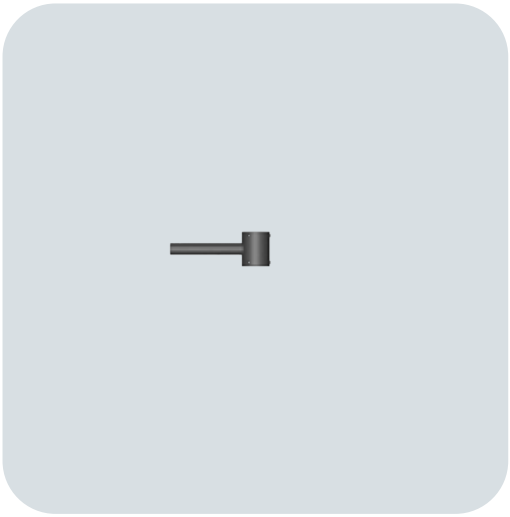

MECHANICAL CHARACTERISTICS
Top made of UNI EN 10219-1 (S235JR) steel, hot-dip galvanized according to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE


Example: **NV4102501-N-TS-ECS-P1-HM0140-ZS0350-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0140** 5.512 in	**ZS0350** 13.78 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nova M | Top | Steel | Simple | Max 2 light sources

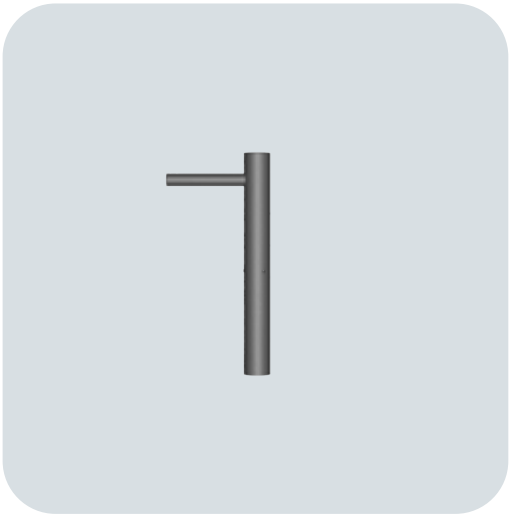

MECHANICAL CHARACTERISTICS
Top made of UNI EN 10219-1 (S235JR) steel, hot-dip galvanized according to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **NV4102500-N-TS-ECS-P1-HM0850-ZS0350-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0850** 33.465 in	**ZS0350** 13.78 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Propus | Top | Steel | Curved arm | Max 2 light sources



MECHANICAL CHARACTERISTICS
Made from S235 UNI EN 10219-1 with hot-dip galvanized coating in accordance with UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **PR4102132-N-TS-ECS-P1-HM1000-ZS1200-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM1000** 39.37 in	**ZS1200** 47.244 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Propus | Top | Steel | Wavy arm | Max 2 light sources



MECHANICAL CHARACTERISTICS
Made from S235 UNI EN 10219-1 with hot-dip galvanized coating in accordance with UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **PR4102134-N-TS-ECS-P1-HM0670-ZS1200-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0670** 26.378 in	**ZS1200** 47.244 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Saiph | Top | Steel | Simple | Max 2 light sources



MECHANICAL CHARACTERISTICS
Top section made of S235 UNI EN 10219-1 steel elements and aluminium casting (C40), hot-galvanized conforming to standard UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **SA4102128-N-TS-ECS-P1-HM0390-ZS1200-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**P1** Max 1 light source	**HM0350** 13.78 in	**ZS1200** 47.244 in	**CN0** Grey [Neri] Textured
		P2 Max 2 light sources	**HM0390** 15.354 in		

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Top | Cast iron + Steel | Decorated | Max 3 light sources



MECHANICAL CHARACTERISTICS
The top section is made in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel.

ORDERING INFORMATION / GUIDE

Example: **SG4201021-N-TP-ECD-P2-HM1660-ZS0540-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**P2** Max 2 light sources	**HM1660** 65.354 in	**ZS0540** 21.26 in	**CN0** Grey [Neri] Textured
		P3 Max 3 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Top | Cast iron + Steel | Decorated | Max 3 light sources



MECHANICAL CHARACTERISTICS
The top section is made in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel.

ORDERING INFORMATION / GUIDE

Example: **SG4202021-N-TP-ECD-P2-HM1120-ZS0540-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**P2** Max 2 light sources	**HM1120** 44.095 in	**ZS0540** 21.26 in	**CN0** Grey [Neri] Textured
		P3 Max 3 light sources			

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.


CONFIGURE ONLINE
AND DISCOVER MORE

Maia	352	
Alcor	355	
Castore	356	
Heka	357	
Kuma	358	
Lyra	360	Quick Ship Program
Nova	361	
Sheliak	362	
Tabit	365	

Wall Brackets

WALL BRACKETS

Collection Preview

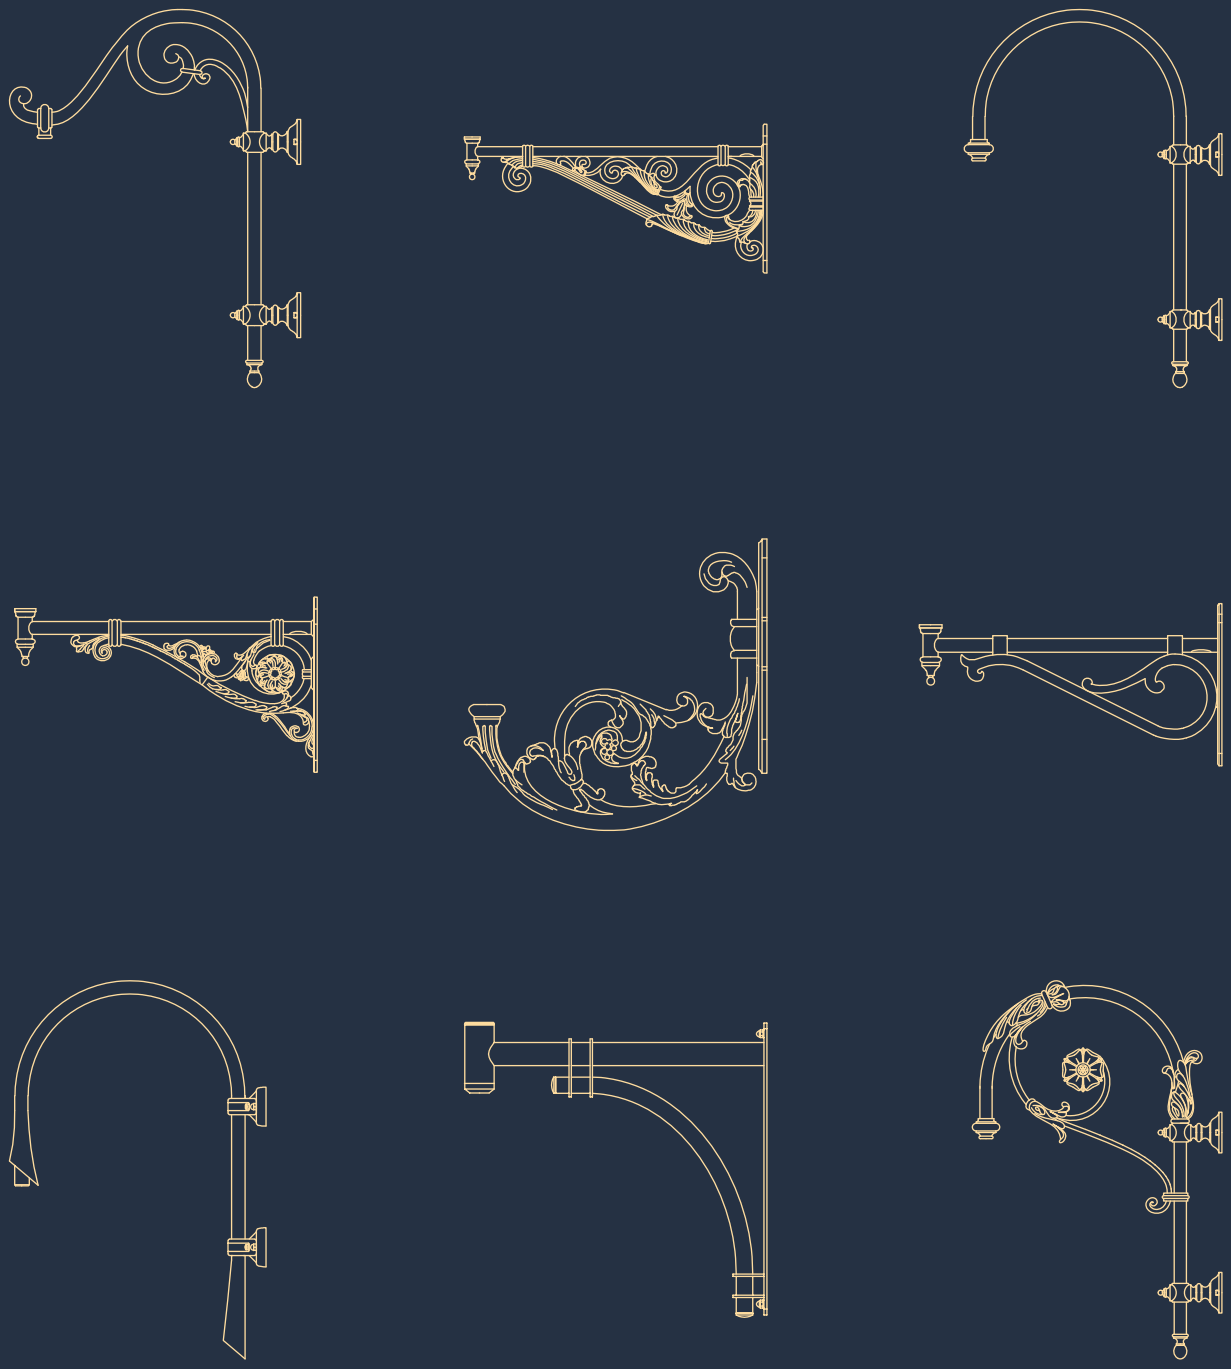

Neri wall brackets are the ideal solution for enhancing facades and pathways where space is limited. The result of a careful study of proportions, ornamentation, and aesthetic refinement, they allow for the installation of lanterns and pendant fixtures with seamless stylistic continuity.

Maia | Wall shelf | Cast iron + Steel | Swan neck - Suspended | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel, hot-dip galvanized to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE


Example: **MA40400000-N-TS-ECS-HM1200-ZS0810-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**HM1200** 47.244 in	**ZS0810** 31.89 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Maia | Wall shelf | Steel | Post top entry | Max 1 light source

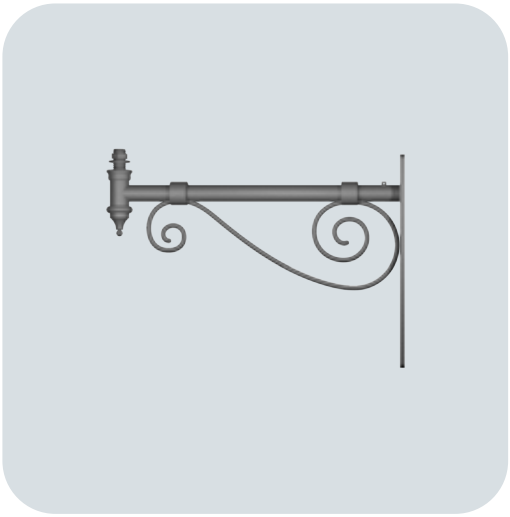

MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel, hot-dip galvanized to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **MA42151010-N-TP-ECS-HM0450-ZS0600-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**HM0450** 17.717 in	**ZS0600** 23.622 in	**CN0** Grey [Neri] Textured
			ZS0900 35.433 in	

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Maia | Wall shelf | Steel | Suspended | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel, hot-dip galvanized to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **MA42151030-N-TS-ECS-HM0450-ZS0750-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**HM0450** 17.717 in	**ZS0750** 29.528 in	**CN0** Grey [Neri] Textured
			ZS1050 41.339 in	

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Alcor | Wall shelf | Cast iron + Steel | Smooth - Swan neck | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket made from elements in UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel hot-galvanized to UNI ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **AL40750000-N-TS-ECS-HM1160-ZS0680-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**HM1160** 45.669 in	**ZS0680** 26.772 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Castore | Wall shelf | Cast iron | Decorated | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **CA40470000-N-TP-ECD-HM0450-ZS0750-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**HM0450** 17.717 in	**ZS0750** 29.528 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Heka | Wall shelf | Steel | Simple - Suspended | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket made from elements S235 UNI EN 10219-1 steel hot-galvanized to UNI ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **HE42200751-N-TS-ECS-HM0750-ZS0775-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**HM0750** 29.528 in	**ZS0775** 30.512 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Wall shelf | Cast iron + Steel | Swan neck - Suspended | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket made from elements in UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel hot-galvanized to UNI ISO 1461 standards.

ORDERING INFORMATION / GUIDE


Example: **KU40390000-N-TS-ECS-HM1260-ZS0810-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**HM1260** 49.606 in	**ZS0810** 31.89 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Kuma | Wall shelf | Cast iron + Steel | Straight - Suspended | Max 1 light source

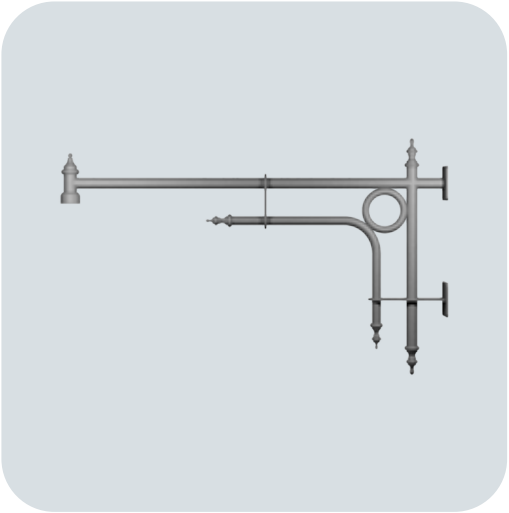

MECHANICAL CHARACTERISTICS
Wall bracket made from elements in UNI EN 1563 nodular cast iron and S235 UNI EN 10219-1 steel hot-galvanized to UNI ISO 1461 standards.

ORDERING INFORMATION / GUIDE


Example: **KU42184230-N-TS-ECS-HM0715-ZS1145-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECS** Simple	**HM0715** 28.15 in	**ZS1145** 45.079 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Lyra | Wall shelf | Aluminum | Max 1 light source

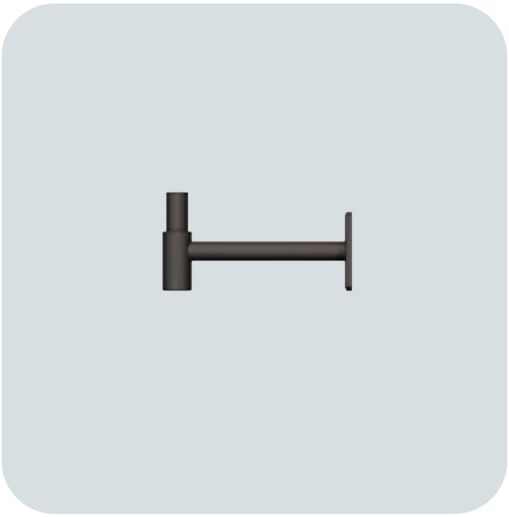

MECHANICAL CHARACTERISTICS

Wall-mounted lighting arm made of welded 6061-T6 aluminum sections (ASTM B221-20), consisting of a horizontal arm with a top tenon for fixture mounting and a rectangular plate with mounting holes for wall fixing and cable routing.

ORDERING INFORMATION / GUIDE

Example: **LYWBUP-U-TP-ECS-HM3048-ZS0489-CN0**


LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**HM3048** 120 in	**ZS0489** 19.252 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nova | Wall shelf | Steel | Simple | Max 1 light source

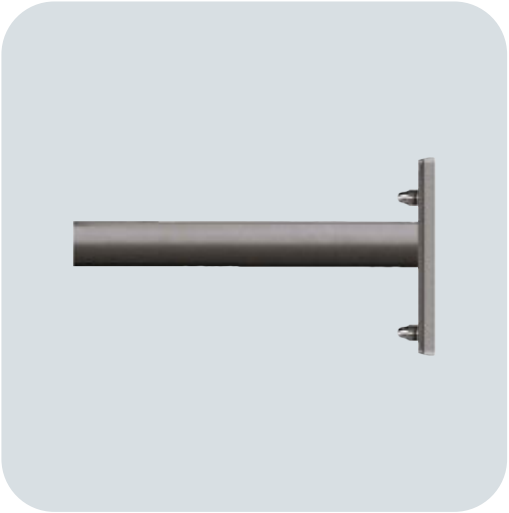

MECHANICAL CHARACTERISTICS

Wall bracket made of steel tubes S235 UNI EN 10219-1, steel plate S355 UNI EN 10025 and stainless steel bolts, hot-dip galvanized according to UNI EN ISO 1461.

ORDERING INFORMATION / GUIDE

Example: **NV40391420-N-TP-ECS-HM0220-ZS0400-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**HM0220** 8.661 in	**ZS0400** 15.748 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Wall shelf | Cast iron | Curved - Post top entry | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **SH40230000-N-TP-ECD-HM0500-ZS0490-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**HM0500** 19.685 in	**ZS0490** 19.291 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Wall shelf | Cast iron | Straight - Post top entry | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **SH40320000-N-TP-ECD-HM0505-ZS1000-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**HM0505** 19.882 in	**ZS1000** 39.37 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Wall shelf | Cast iron + Steel | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE


Example: **SH40190030-N-TS-ECD-HM1280-ZS0810-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECD** Decorated	**HM1280** 50.394 in	**ZS0810** 31.89 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Tabit | Wall shelf | Cast iron + Steel | Small | Max 1 light source

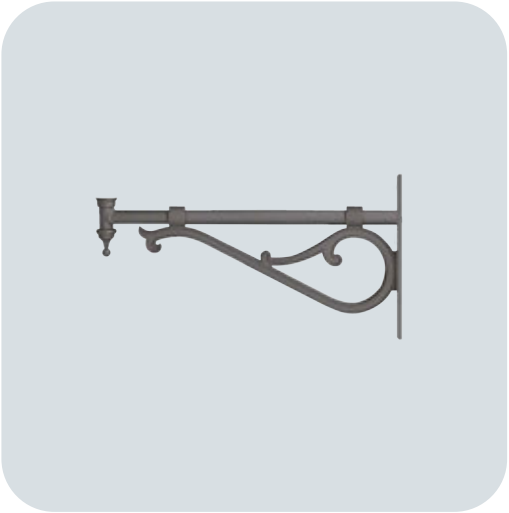

MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **TA40670000-N-TP-ECS-HM0390-ZS0700-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**HM0390** 15.354 in	**ZS0700** 27.559 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Tabit | Wall shelf | Cast iron + Steel | Large | Max 1 light source



MECHANICAL CHARACTERISTICS
Wall bracket in UNI EN 1561 cast iron, S235 UNI EN 10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards.

ORDERING INFORMATION / GUIDE

Example: **TA40660000-N-TP-ECS-HM0450-ZS1000-CN0**

LIGHTING FIXTURE SET UP	SHAPE	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECS** Simple	**HM0450** 17.717 in	**ZS1000** 39.37 in	**CN0** Grey [Neri] Textured


ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Castore 370
Nashira 371
Sheliak 373

Chandeliers

CHANDELIERS

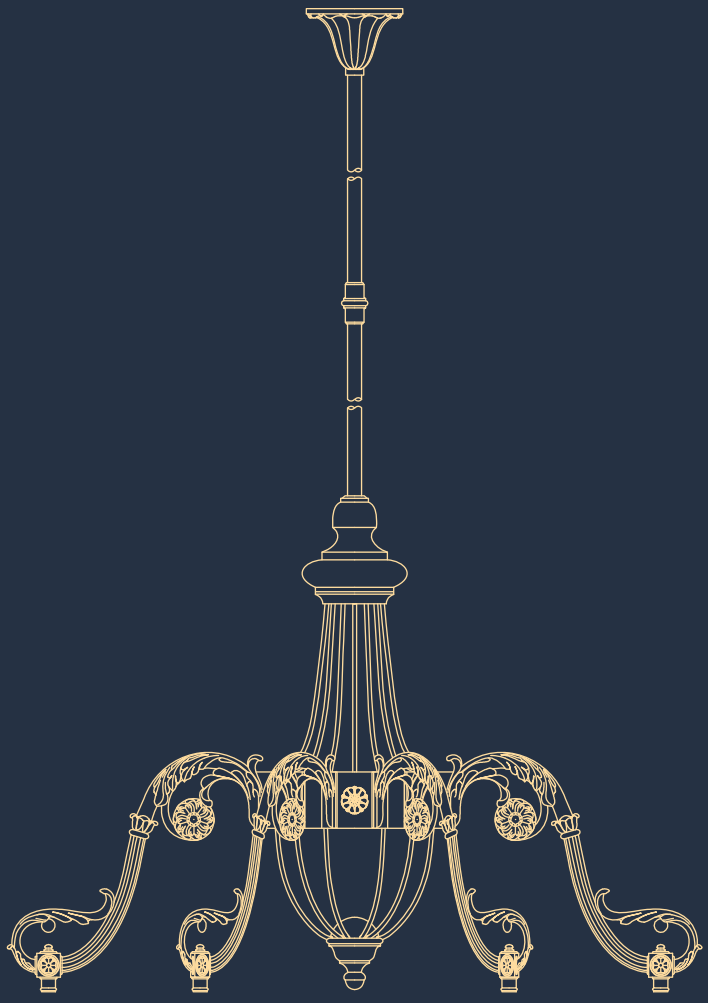

Our decorative chandeliers bring the elegance of indoor lighting to grand open spaces, loggias, and porches. These breathtaking structures seamlessly blend the historic charm of Heritage aesthetics with cutting-edge technology, creating welcoming atmospheres that enhance the beauty of historic centers and urban areas.

Castore | Chandelier | Cast iron + Steel | Decorated | 3 light sources



MECHANICAL CHARACTERISTICS

Chandelier made in S235 UNI EN 10219-1 steel hot-galvanized to UNI EN ISO 1461 standards, UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and UNI EN 1706 aluminium.

ORDERING INFORMATION / GUIDE

Example: **CA39902-N-TP-ECD-P4-HM0700-ZS0071-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**P4** Max 4 light sources	**HM0700** 27.559 in	**ZS0071** 2.795 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nashira | Chandelier | Steel + Aluminium | Decorated | 4 light sources



MECHANICAL CHARACTERISTICS
Chandelier made in S235 UNI EN 10219-1 steel, steel hot-galvanized to UNI EN ISO 1461 standards, UNI EN 1706 aluminium and UNI EN 1982 brass.

ORDERING INFORMATION / GUIDE

Example: **NA39992-N-TS-ECD-P4-HM1530-ZS0104-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECD** Decorated	**P4** Max 4 light sources	**HM1530** 60.236 in	**ZS0104** 4.094 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Nashira | Chandelier | Steel + Aluminium | Decorated | 6 light sources



MECHANICAL CHARACTERISTICS
Chandelier made in S235 UNI EN 10219-1 steel, steel hot-galvanized to UNI EN ISO 1461 standards, UNI EN 1706 aluminium and UNI EN 1982 brass.

ORDERING INFORMATION / GUIDE

Example: **NA39991-N-TS-ECD-P6-HM1530-ZS0104-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TS Suspended	**ECD** Decorated	**P6** Max 6 light sources	**HM1530** 60.236 in	**ZS0104** 4.094 in	**CN0** Grey [Neri] Textured

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE

Sheliak | Chandelier | Cast iron + Steel | Decorated | 3 light sources



MECHANICAL CHARACTERISTICS

Chandelier made of cast iron elements compliant with UNI EN 1561, spheroidal graphite cast iron compliant with UNI EN 1563, and FE 360 steel compliant with UNI EN 10219-1.

ORDERING INFORMATION / GUIDE

Example: **SH39901-N-TP-ECD-P3-HM0700-ZS0054-CN0**

LIGHTING FIXTURE SET UP	SHAPE	LIGHT POINTS	HEIGHT	OVERHANG	FINISH
TP Post top entry	**ECD** Decorated	**P3** Max 3 light sources	**HM0700** 27.559 in	**ZS0054** 2.126 in	**CN0** Grey [Neri] Textured

ON REQUEST

Non-standard variants and configurations available upon request. Please contact Neri for further information.

CONFIGURE ONLINE
AND DISCOVER MORE




Photometrics


POLAR DIAGRAM AND ISOLUX

90.0 —— 270.0 0.0 ------- 180.0


D00 - Diffuse

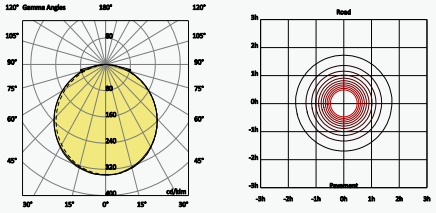


D01 - T1

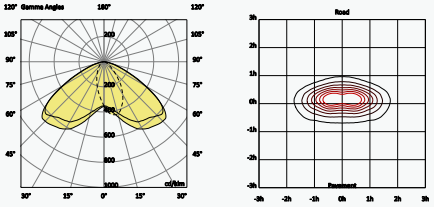


D02 - T2

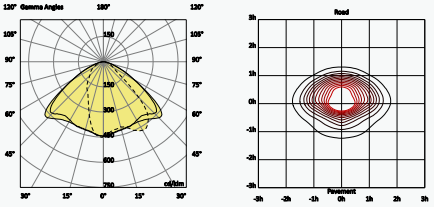


D03 - T2

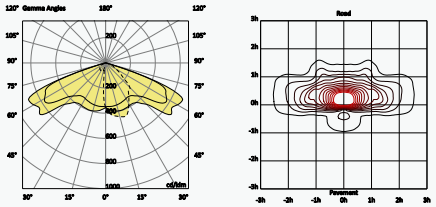


D05 - T3

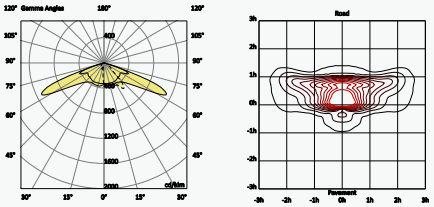


D06 - T2 + T3

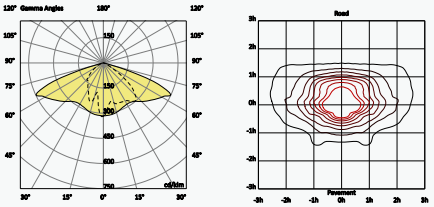


D07 - T3 + T3

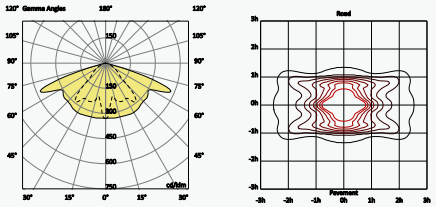


D08 - T3 + T4

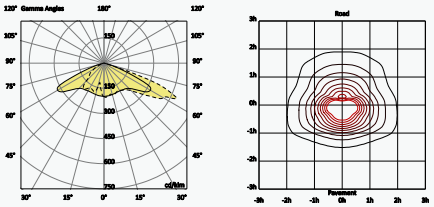


D09 - T4

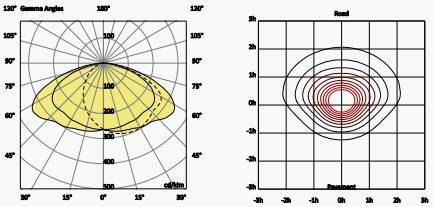


D10 - T4

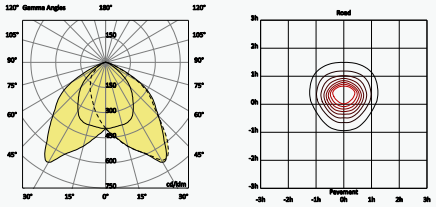


D11 - T4

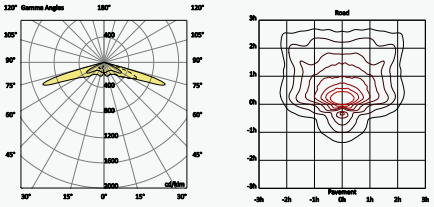


D12 - T2 + T4

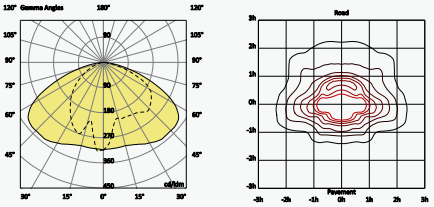


D13 - T4 + T4

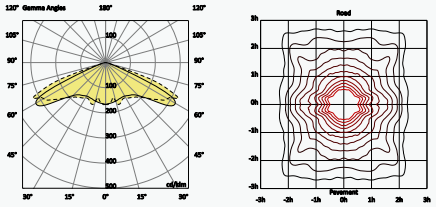


D14 - T5

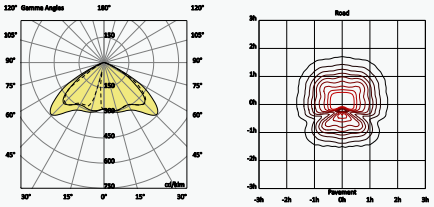


D16 - Flood

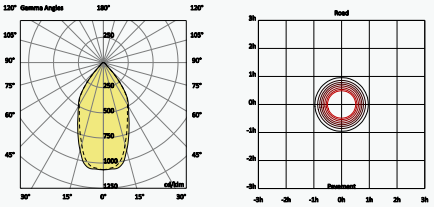


D18 - Type V - B

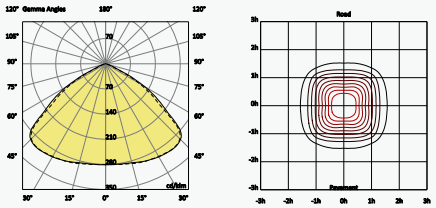


D20 - T2 short

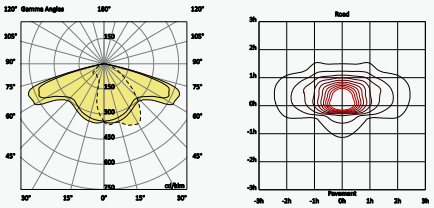


D22 - T3 narrow

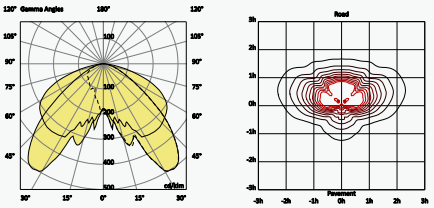


D23 - Right corner

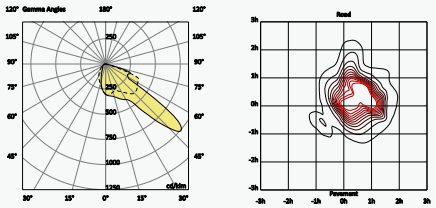

D24 - T4 wide

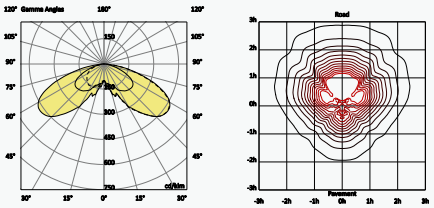


D25 - T2 narrow

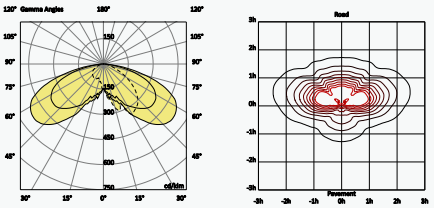


90.0 —— 270.0 0.0 ------- 180.0


D28 - T1 short

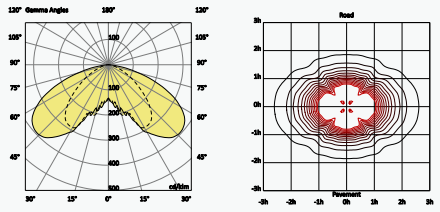


D29 - Medium wide flood

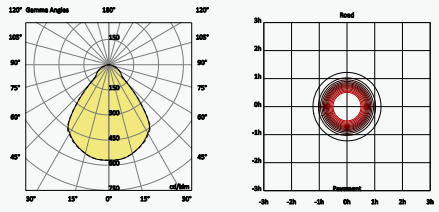


D30 - T5 square medium

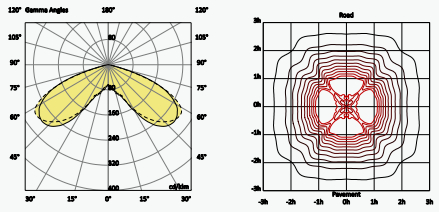


D33 - Flood

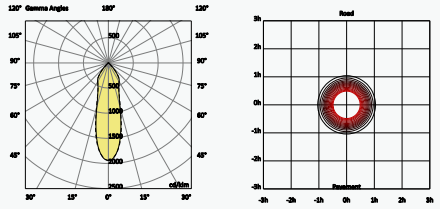


D36 - T2 medium

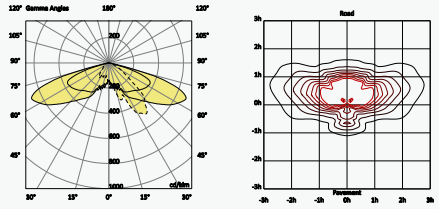


D37 - T3 medium

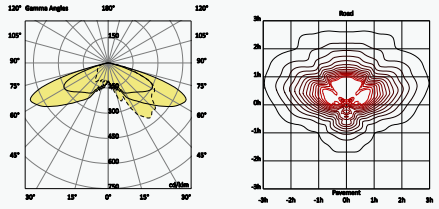


D38 - T4 medium

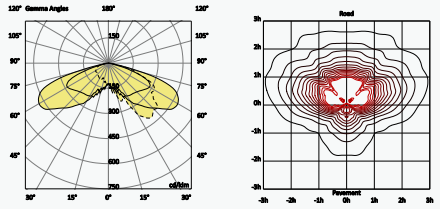


D45 - T5

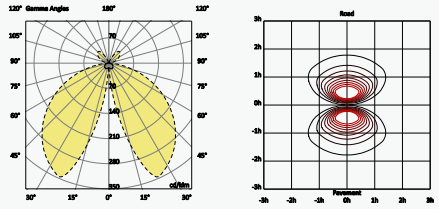


D46 - AFR/SPORT N

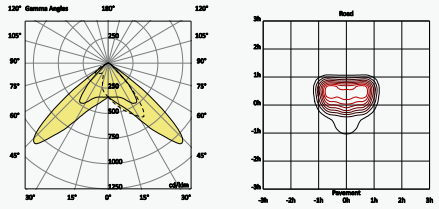


D47 - AFR/SPORT W

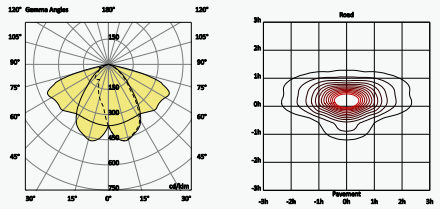


D48 - T2 wide

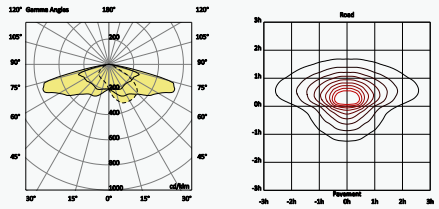


D49 - T5 Round

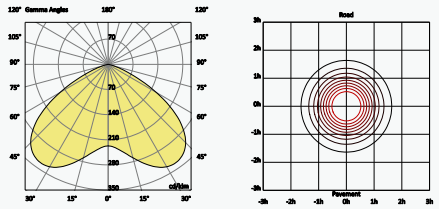


D51 - Left corner

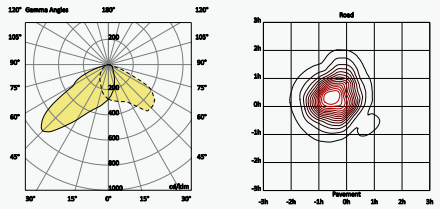


D52 - 360°

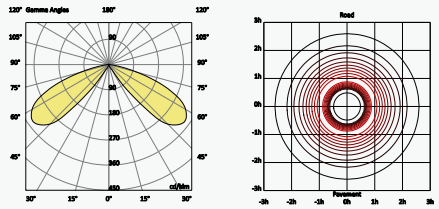


D53 - 180°

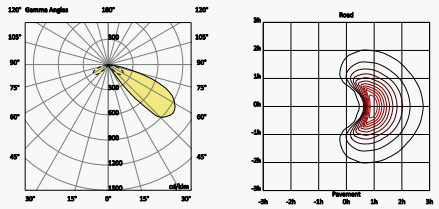


D54 - 90°

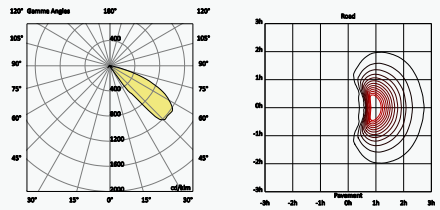


D55 - AFR/SPORT W + BLC

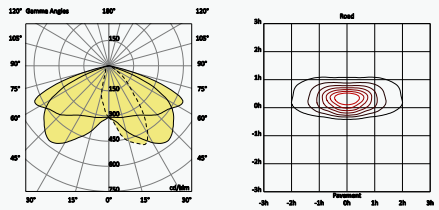


D56 - T2 medium + BLC

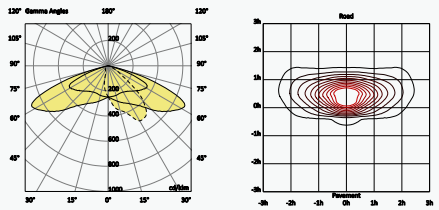


D57 - T3 narrow + BLC

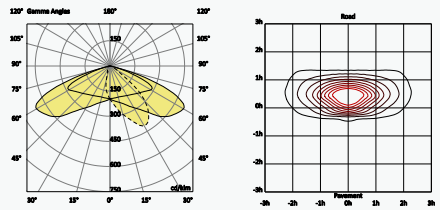

D58 - T4 wide + BLC

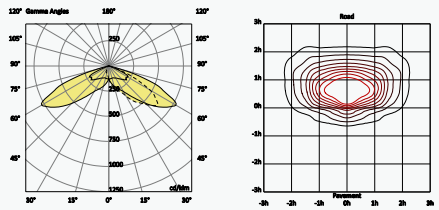


D59 - T3 medium + BLC

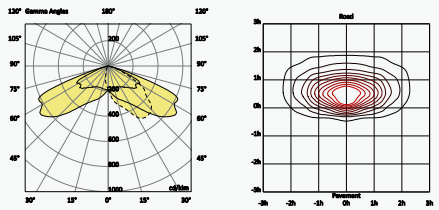


POLAR DIAGRAM AND ISOLUX

90.0 ——— 270.0 0.0 ------- 180.0


D60 - T4 medium + BLC

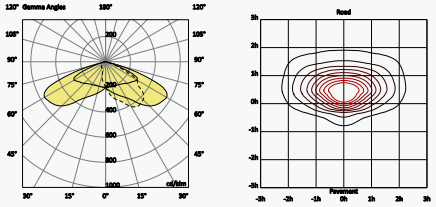


D61 - Spot

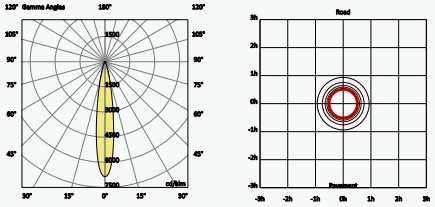


D62 - Flood

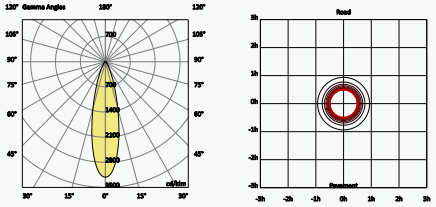


D63 - Medium wide flood

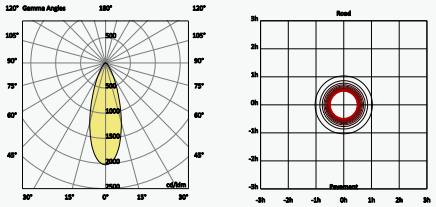


D64 - Wide flood

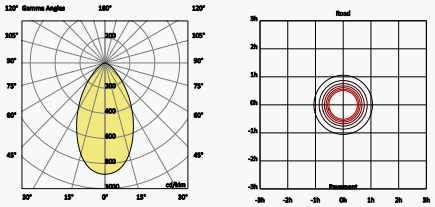


D65 - T5 round

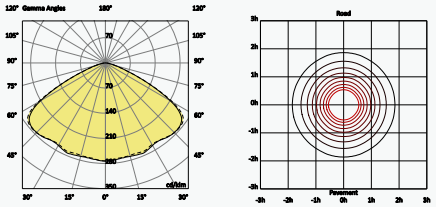


D66 - Flood

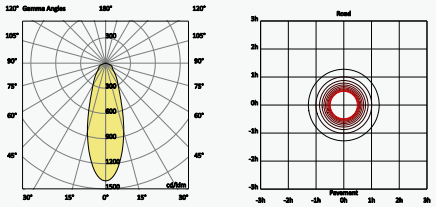


D67 - Wide flood

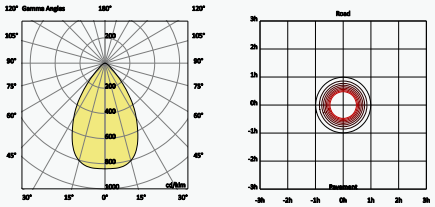

D68 - Very wide flood

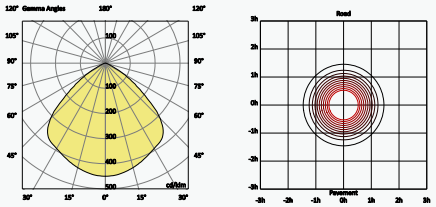

D69 - Wide flood

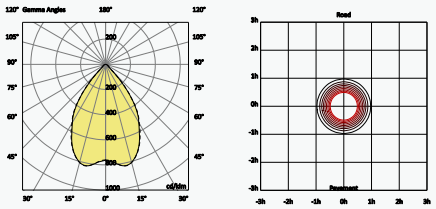

NERI S.p.A
S.S. Emilia 1622
47020 Longiano (FC) - Italy
T +39 0547 666500
E neri@neri.biz
www.neri.biz

NERI NORTH AMERICA INC.
999 Brickell Avenue Suite
1002 Miami, FL 33131 - USA
T. +1 786 315 4367
www.nerinorthamerica.com

NERI LIGHTING (INDIA) PVT. LTD.
Plot no. 46-A, malur 4th phase,
Kiadb industrial area,
Malur - 563130

NERI S.P.A (FZ Branch)
Unit No: R101-03-D101
Reef Tower
Plot No: JLT-PH2-O1A
Jumeirah Lakes Towers
Dubai - UAE

LUCE CATALOGUE
Publisher: **Neri S.p.A.**
Design: **DUBO · Visual storytelling and strategy**
Production: **Raizen · Data Management, Automated Layout**
Printed by: **Pazzini Stampatore Editore S.r.l.**

Neri reserves the right to make changes in design
and product technology in the interest of the customer.

© 2026 – Neri S.p.A.

NERI