
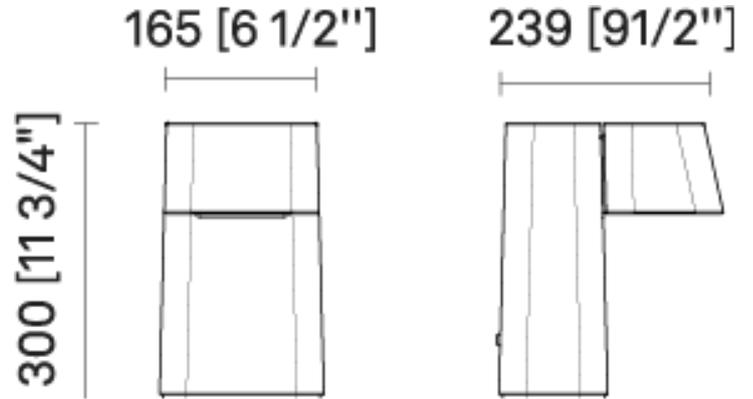


## Brenta Pathlight | Luminaire | Brenta S

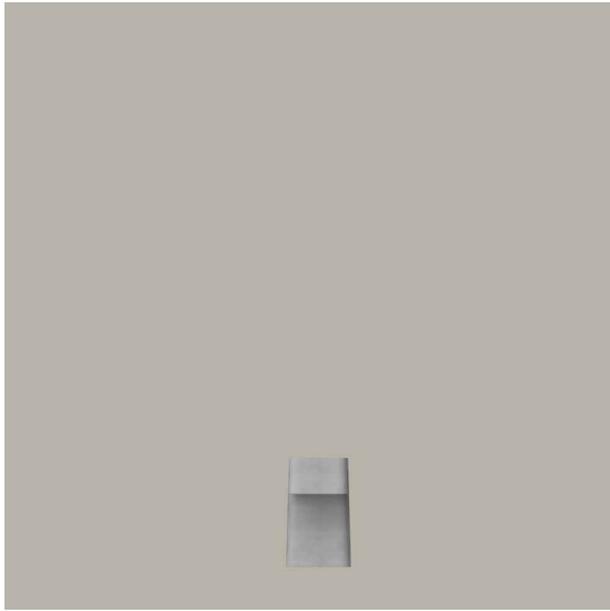

Ordering Information / Guide

Example: **BR2960007-U-D20-830-L010-SP-V0-F02-MU-CG0**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D20 T2 short	830 Ra80 3000 K  840 Ra80 4000 K	L010 1000 lm	SP Prismatic	V0 120V-277V	F02 1-10V+CLO	MU UL	CG0 Grey [RAL 9006] Textured

Generated code: **BR2960007 - U** - \_ \_ \_ \_ \_

## Brenta Pathlight | Luminaire | Brenta S

### SOURCE

High-power LED matrix.

**Standard Deviation Colour Matching**      $\leq 3$

### LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

### MECHANICAL CHARACTERISTICS

Structure made of NeriConcrete, an HPC (High Performance Concrete) with flexural strength (13 MPa) and compressive strength (75 MPa) according to EN 1015-11 at 28 days.

NeriConcrete is a flexible paste made by mixing cement powders and components, polymer fibers, colored pigments, and water, adaptable to any mold.

Protective shield in prismatic flat tempered glass (IK08 – EN 62262) with stainless steel fastening elements.

The surface treatment makes the material water-repellent and stain-resistant.

### WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.

Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.