


Nebula L | Luminaire

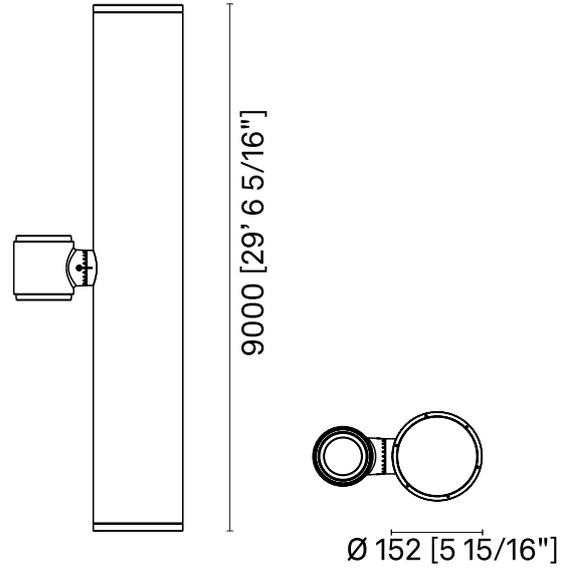

Ordering Information / Guide

Example: **LUNEBLO-U-D66-827-L025-ST-V0-F35-MU-CNO**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D68 Very wide flood	827 Ra80 2700 K	L025 2500 lm	ST Transparent	V0 120V-277V	F35 0-10V+CLO	MU UL	CNO Grey [Neri] Textured
D66 Flood	830 Ra80 3000 K	L035 3500 lm	SP Prismatic				
D02 T2	840 Ra80 4000 K	L045 4500 lm					
D10 T4		L060 6000 lm					
D65 T5 round							

Generated code: **LUNEBLO - U** - _ _ _ _ _

Nebula L | Luminaire

SOURCE

Standard Deviation Colour Matching ≤3

ELECTRICAL CHARACTERISTICS

Cable length 29.528 ft

Cable type 5GAWG18 SJTW

INSTALLATION

Tilt-adjustable joint.

Continuous adjustment with no fixed steps.

Secured by four M8 stainless steel set screws with locknuts.

WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Nebula L | Luminaire


Very wide flood

Transparent

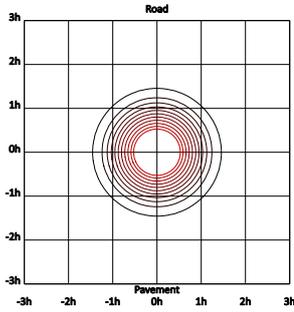


Flood

Transparent

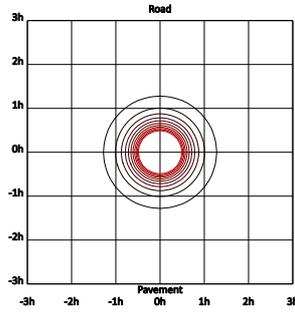


T2

Prismatic

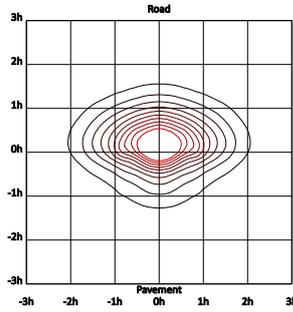


T4

Prismatic

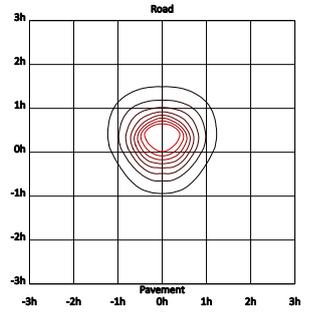


T5 round

Transparent

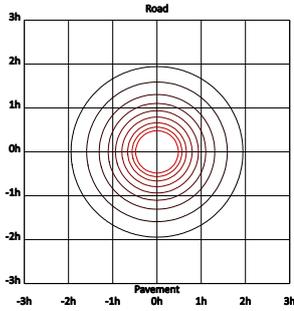

T5 round

Prismatic

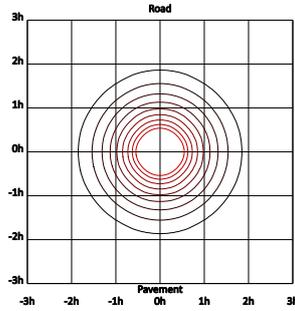

Nebula L | Luminaire

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
2500 lm	2700 K	21.9	114	1	T2	Prismatic	1	0	1
2500 lm	2700 K	21.9	114	1	T5 round	Transparent	1	0	0
2500 lm	2700 K	21.9	114	1	Flood	Transparent	2	0	0
2500 lm	2700 K	21.8	115	1	T4	Prismatic	1	0	0
2500 lm	2700 K	21.8	115	1	T5 round	Prismatic	1	0	0
2500 lm	2700 K	21.8	115	1	Very wide flood	Transparent	1	0	0
2500 lm	3000 K	20.8	120	1	T4	Prismatic	1	0	0
2500 lm	3000 K	20.8	120	1	Very wide flood	Transparent	1	0	0
2500 lm	3000 K	20.9	120	1	T2	Prismatic	1	0	1
2500 lm	3000 K	20.9	120	1	T5 round	Transparent	1	0	0
2500 lm	3000 K	20.9	120	1	T5 round	Prismatic	1	0	0
2500 lm	3000 K	20.9	120	1	Flood	Transparent	2	0	0
2500 lm	4000 K	20.3	123	1	T2	Prismatic	1	0	1
2500 lm	4000 K	20.3	123	1	T4	Prismatic	1	0	0
2500 lm	4000 K	20.3	123	1	T5 round	Transparent	1	0	0
2500 lm	4000 K	20.3	123	1	T5 round	Prismatic	1	0	0
2500 lm	4000 K	20.3	123	1	Flood	Transparent	2	0	0
2500 lm	4000 K	20.3	123	1	Very wide flood	Transparent	1	0	0
3500 lm	2700 K	30.9	113	1	T2	Prismatic	1	0	1
3500 lm	2700 K	30.9	113	1	T4	Prismatic	1	0	0
3500 lm	2700 K	30.9	113	1	T5 round	Transparent	2	0	1
3500 lm	2700 K	30.9	113	1	T5 round	Prismatic	2	0	0
3500 lm	2700 K	30.9	113	1	Flood	Transparent	2	0	0
3500 lm	2700 K	30.9	113	1	Very wide flood	Transparent	2	0	0
3500 lm	3000 K	29.5	119	1	T2	Prismatic	1	0	1
3500 lm	3000 K	29.5	119	1	T4	Prismatic	1	0	0
3500 lm	3000 K	29.5	119	1	Flood	Transparent	2	0	0
3500 lm	3000 K	29.5	119	1	Very wide flood	Transparent	2	0	0
3500 lm	3000 K	29.6	118	1	T5 round	Transparent	2	0	1
3500 lm	3000 K	29.6	118	1	T5 round	Prismatic	2	0	0
3500 lm	4000 K	28.8	122	1	T2	Prismatic	1	0	1
3500 lm	4000 K	28.8	122	1	T5 round	Transparent	2	0	1
3500 lm	4000 K	28.8	122	1	T5 round	Prismatic	2	0	0
3500 lm	4000 K	28.8	122	1	Flood	Transparent	2	0	0
3500 lm	4000 K	28.7	122	1	T4	Prismatic	1	0	0
3500 lm	4000 K	28.7	122	1	Very wide flood	Transparent	2	0	0
4500 lm	2700 K	40.6	111	1	T2	Prismatic	1	0	1
4500 lm	2700 K	40.6	111	1	T5 round	Transparent	2	0	1
4500 lm	2700 K	40.6	111	1	T5 round	Prismatic	2	0	1
4500 lm	2700 K	40.6	111	1	Flood	Transparent	3	0	0
4500 lm	2700 K	40.4	111	1	T4	Prismatic	2	0	1
4500 lm	2700 K	40.4	111	1	Very wide flood	Transparent	2	0	0
4500 lm	3000 K	38.8	116	1	T2	Prismatic	1	0	1
4500 lm	3000 K	38.8	116	1	T5 round	Transparent	2	0	1
4500 lm	3000 K	38.8	116	1	T5 round	Prismatic	2	0	1
4500 lm	3000 K	38.8	116	1	Flood	Transparent	3	0	0
4500 lm	3000 K	38.5	117	1	T4	Prismatic	2	0	1
4500 lm	3000 K	38.5	117	1	Very wide flood	Transparent	2	0	0
4500 lm	4000 K	37.5	120	1	T2	Prismatic	1	0	1
4500 lm	4000 K	37.5	120	1	T4	Prismatic	2	0	1
4500 lm	4000 K	37.5	120	1	Very wide flood	Transparent	2	0	0
4500 lm	4000 K	37.6	120	1	T5 round	Transparent	2	0	1
4500 lm	4000 K	37.6	120	1	T5 round	Prismatic	2	0	1
4500 lm	4000 K	37.6	120	1	Flood	Transparent	3	0	0
6000 lm	2700 K	55.8	108	1	T2	Prismatic	2	0	1

Nebula L | Luminaire

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							2	0	1
6000 lm	2700 K	55.8	108	1	T5 round	Transparent	2	0	1
6000 lm	2700 K	55.8	108	1	T5 round	Prismatic	2	0	1
6000 lm	2700 K	55.8	108	1	Flood	Transparent	3	0	0
6000 lm	2700 K	55.4	108	1	T4	Prismatic	2	0	1
6000 lm	2700 K	55.4	108	1	Very wide flood	Transparent	3	0	0
6000 lm	3000 K	53.2	113	1	T2	Prismatic	2	0	1
6000 lm	3000 K	53.2	113	1	T5 round	Transparent	2	0	1
6000 lm	3000 K	53.2	113	1	T5 round	Prismatic	2	0	1
6000 lm	3000 K	53.2	113	1	Flood	Transparent	3	0	0
6000 lm	3000 K	52.9	113	1	T4	Prismatic	2	0	1
6000 lm	3000 K	52.9	113	1	Very wide flood	Transparent	3	0	0
6000 lm	4000 K	51.6	116	1	T2	Prismatic	2	0	1
6000 lm	4000 K	51.6	116	1	T5 round	Transparent	2	0	1
6000 lm	4000 K	51.6	116	1	T5 round	Prismatic	2	0	1
6000 lm	4000 K	51.6	116	1	Flood	Transparent	3	0	0
6000 lm	4000 K	51.4	117	1	T4	Prismatic	2	0	1
6000 lm	4000 K	51.4	117	1	Very wide flood	Transparent	3	0	0