


## Nebula L | Luminaire

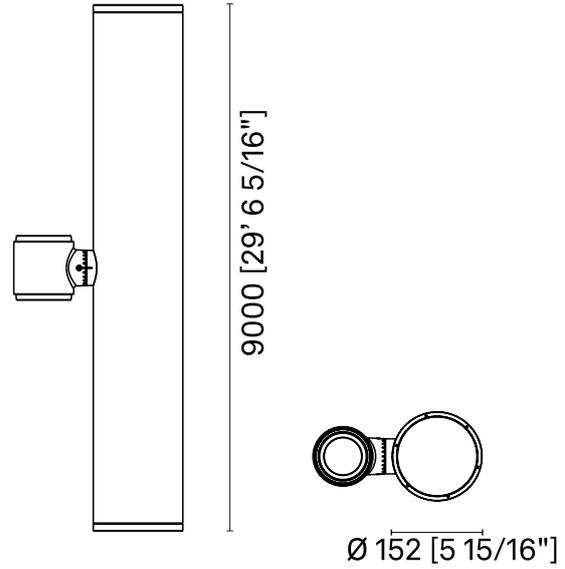

Ordering Information / Guide

Example: **LUNEBLO-N-D02-827-L025-SP-V1-F14-M2-CNO**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
<b>D68</b> Very wide flood	<b>827</b> Ra80 2700 K	<b>L025</b> 2500 lm	<b>ST</b> Transparent	<b>V1</b> 220V-240V	<b>F06</b> DALI+CLO	<b>M2</b> Class II	<b>CNO</b> Grey [Neri] Textured
<b>D66</b> Flood	<b>830</b> Ra80 3000 K	<b>L035</b> 3500 lm	<b>SP</b> Prismatic		<b>F14</b> NVL6H+CLO		
<b>D02</b> Type II	<b>840</b> Ra80 4000 K	<b>L045</b> 4500 lm					
<b>D10</b> Type IV		<b>L060</b> 6000 lm					
<b>D65</b> Type VR							

Generated code: **LUNEBLO - N** - \_ \_ \_ \_ \_

## Nebula L | Luminaire

### SOURCE

Standard Deviation Colour Matching  $\leq 3$

### ELECTRICAL CHARACTERISTICS

Cable length 9 m

### INSTALLATION

Joint with tilt adjustment.

Infinite adjustment possible without intermediate steps.

Fastening via four M8 stainless steel grub screws with locknuts.

### WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

## Nebula L | Luminaire


### Very wide flood

Transparent

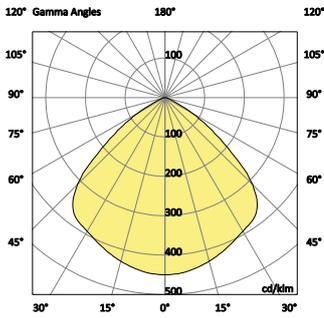


### Flood

Transparent

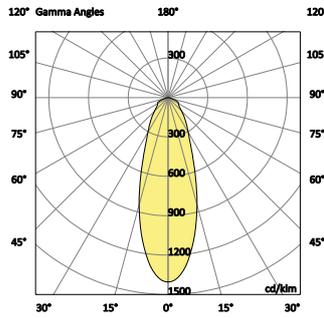


### Type II

Prismatic

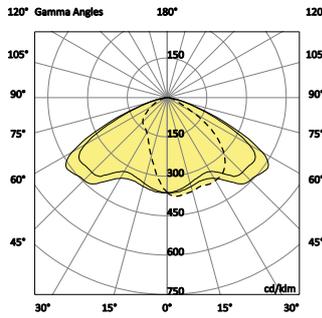


### Type IV

Prismatic

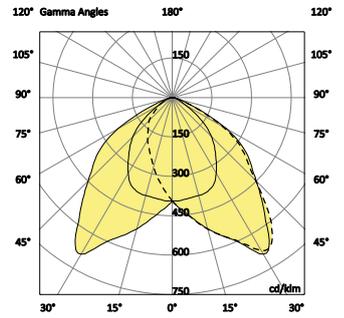


### Type VR

Transparent

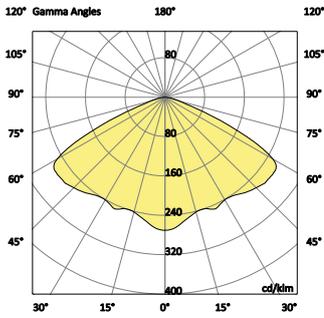

### Type VR

Prismatic

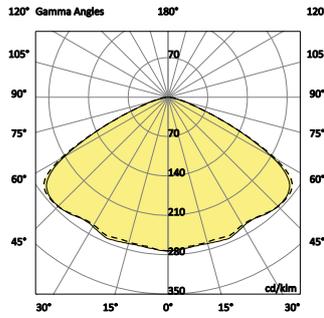

## Nebula L | Luminaire

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
2500 lm	2700 K	21.8	115	1	Type II	Prismatic	1	0	1
2500 lm	2700 K	21.8	115	1	Type IV	Prismatic	1	0	0
2500 lm	2700 K	21.8	115	1	Type VR	Transparent	1	0	0
2500 lm	2700 K	21.8	115	1	Type VR	Prismatic	1	0	0
2500 lm	2700 K	21.8	115	1	Flood	Transparent	2	0	0
2500 lm	2700 K	21.8	115	1	Very wide flood	Transparent	1	0	0
2500 lm	3000 K	20.9	120	1	Type II	Prismatic	1	0	1
2500 lm	3000 K	20.9	120	1	Type IV	Prismatic	1	0	0
2500 lm	3000 K	20.9	120	1	Type VR	Transparent	1	0	0
2500 lm	3000 K	20.9	120	1	Type VR	Prismatic	1	0	0
2500 lm	3000 K	20.9	120	1	Flood	Transparent	2	0	0
2500 lm	3000 K	20.9	120	1	Very wide flood	Transparent	1	0	0
2500 lm	4000 K	20.3	123	1	Type II	Prismatic	1	0	1
2500 lm	4000 K	20.3	123	1	Type IV	Prismatic	1	0	0
2500 lm	4000 K	20.3	123	1	Type VR	Transparent	1	0	0
2500 lm	4000 K	20.3	123	1	Type VR	Prismatic	1	0	0
2500 lm	4000 K	20.3	123	1	Flood	Transparent	2	0	0
2500 lm	4000 K	20.3	123	1	Very wide flood	Transparent	1	0	0
3500 lm	2700 K	30.3	116	1	Type II	Prismatic	1	0	1
3500 lm	2700 K	30.3	116	1	Type IV	Prismatic	1	0	0
3500 lm	2700 K	30.3	116	1	Type VR	Transparent	2	0	1
3500 lm	2700 K	30.3	116	1	Type VR	Prismatic	2	0	0
3500 lm	2700 K	30.3	116	1	Flood	Transparent	2	0	0
3500 lm	2700 K	30.3	116	1	Very wide flood	Transparent	2	0	0
3500 lm	3000 K	29.2	120	1	Type II	Prismatic	1	0	1
3500 lm	3000 K	29.2	120	1	Type IV	Prismatic	1	0	0
3500 lm	3000 K	29.2	120	1	Type VR	Transparent	2	0	1
3500 lm	3000 K	29.2	120	1	Type VR	Prismatic	2	0	0
3500 lm	3000 K	29.2	120	1	Flood	Transparent	2	0	0
3500 lm	3000 K	29.2	120	1	Very wide flood	Transparent	2	0	0
3500 lm	3000 K	29.1	120	1	Flood	Transparent	2	0	0
3500 lm	3000 K	29.1	120	1	Very wide flood	Transparent	2	0	0
3500 lm	4000 K	28.4	123	1	Type II	Prismatic	1	0	1
3500 lm	4000 K	28.4	123	1	Type IV	Prismatic	1	0	0
3500 lm	4000 K	28.4	123	1	Type VR	Transparent	2	0	1
3500 lm	4000 K	28.4	123	1	Type VR	Prismatic	2	0	0
3500 lm	4000 K	28.4	123	1	Flood	Transparent	2	0	0
3500 lm	4000 K	28.4	123	1	Very wide flood	Transparent	2	0	0
4500 lm	2700 K	39.4	114	1	Type II	Prismatic	1	0	1
4500 lm	2700 K	39.4	114	1	Type IV	Prismatic	2	0	1
4500 lm	2700 K	39.4	114	1	Type VR	Transparent	2	0	1
4500 lm	2700 K	39.4	114	1	Type VR	Prismatic	2	0	1
4500 lm	2700 K	39.4	114	1	Flood	Transparent	3	0	0
4500 lm	2700 K	39.4	114	1	Very wide flood	Transparent	2	0	0
4500 lm	3000 K	37.5	120	1	Type II	Prismatic	1	0	1
4500 lm	3000 K	37.5	120	1	Type IV	Prismatic	2	0	1
4500 lm	3000 K	37.5	120	1	Very wide flood	Transparent	2	0	0
4500 lm	3000 K	37.7	119	1	Type IV	Prismatic	2	0	1
4500 lm	3000 K	37.7	119	1	Type VR	Transparent	2	0	1
4500 lm	3000 K	37.7	119	1	Type VR	Prismatic	2	0	1
4500 lm	3000 K	37.7	119	1	Flood	Transparent	3	0	0
4500 lm	3000 K	37.7	119	1	Very wide flood	Transparent	2	0	0
4500 lm	4000 K	36.7	123	1	Type II	Prismatic	1	0	1
4500 lm	4000 K	36.7	123	1	Type IV	Prismatic	2	0	1
4500 lm	4000 K	36.7	123	1	Type VR	Transparent	2	0	1

## Nebula L | Luminaire

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							2	0	1
4500 lm	4000 K	36.7	123	1	Type VR	Prismatic	2	0	1
4500 lm	4000 K	36.7	123	1	Flood	Transparent	3	0	0
4500 lm	4000 K	36.7	123	1	Very wide flood	Transparent	2	0	0
4500 lm	4000 K	36.5	123	1	Flood	Transparent	3	0	0
6000 lm	2700 K	53.6	112	1	Type II	Prismatic	2	0	1
6000 lm	2700 K	53.6	112	1	Type IV	Prismatic	2	0	1
6000 lm	2700 K	53.6	112	1	Type VR	Transparent	2	0	1
6000 lm	2700 K	53.6	112	1	Type VR	Prismatic	2	0	1
6000 lm	2700 K	53.6	112	1	Flood	Transparent	3	0	0
6000 lm	2700 K	53.6	112	1	Very wide flood	Transparent	3	0	0
6000 lm	3000 K	51.1	117	1	Type II	Prismatic	2	0	1
6000 lm	3000 K	51.1	117	1	Type IV	Prismatic	2	0	1
6000 lm	3000 K	51.1	117	1	Type VR	Transparent	2	0	1
6000 lm	3000 K	51.1	117	1	Type VR	Prismatic	2	0	1
6000 lm	3000 K	51.1	117	1	Flood	Transparent	3	0	0
6000 lm	3000 K	51.1	117	1	Very wide flood	Transparent	3	0	0
6000 lm	3000 K	50.9	118	1	Type II	Prismatic	2	0	1
6000 lm	3000 K	50.9	118	1	Flood	Transparent	3	0	0
6000 lm	4000 K	49.7	121	1	Type II	Prismatic	2	0	1
6000 lm	4000 K	49.7	121	1	Type IV	Prismatic	2	0	1
6000 lm	4000 K	49.7	121	1	Type VR	Transparent	2	0	1
6000 lm	4000 K	49.7	121	1	Type VR	Prismatic	2	0	1
6000 lm	4000 K	49.7	121	1	Flood	Transparent	3	0	0
6000 lm	4000 K	49.7	121	1	Very wide flood	Transparent	3	0	0