
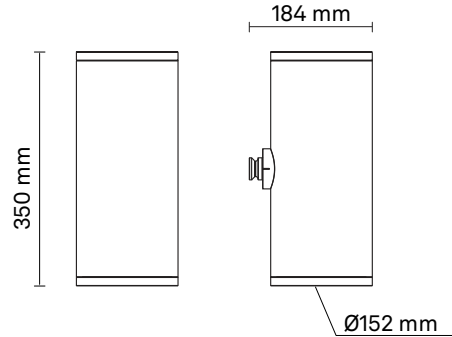


Nebula Compact L | Luminaire

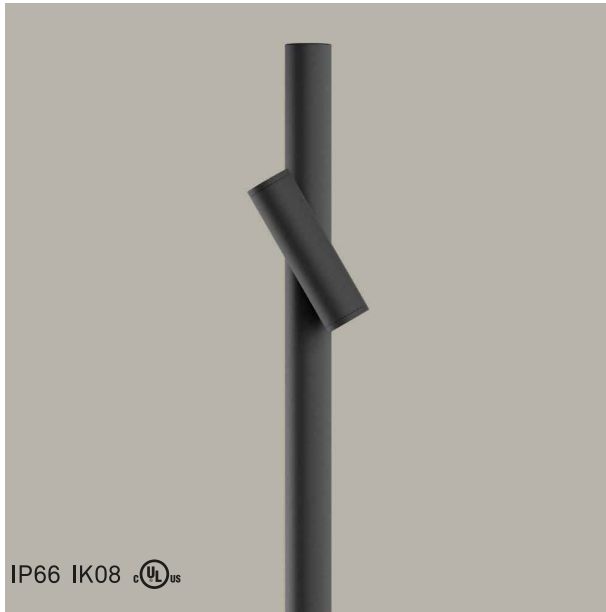

Ordering Information / Guide

Example: **LUNEBL1-U-D02-827-L025-SP-V0-F35-MU-CN0**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D67 Wide flood	827 Ra80 2700 K	L025 2500 lm	ST Transparent	V0 120V-277V	F35 0-10V+CLO	MU UL	CN0 Grey [Neri] Textured
D66 Flood	830 Ra80 3000 K	L035 3500 lm	SP Prismatic				
D02 T2	840 Ra80 4000 K	L045 4500 lm					
D10 T4		L060 6000 lm					
D65 T5 round							

Generated code: **LUNEBL1 - U** - _ _ _ _ _

CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.
 To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

Nebula Compact L | Luminaire

SOURCE

COB LED.	
Energy-efficiency class	D
LED forward current	343-960 mA
Power rating	16.4-47.7 W
Nominal Flux	2500-6000 lm
Nominal CCT (Color temperature)	2700 K / 3000 K / 4000 K
Color Rendering Index (Ra)	80
Standard Deviation Colour Matching	≤3

LIGHTING CHARACTERISTICS

Single silicone lens.	
LED quantity	1

ELECTRICAL CHARACTERISTICS

Luminaire power	20.3-55.8 W
Power supply	120V-277V~ 50/60Hz
Insulation class	UL

MECHANICAL CHARACTERISTICS

Structure made of extruded aluminum and sheet aluminum with an external frame and integrated heat sink in cast aluminum.	
Protective screen in extra-clear tempered flat glass, transparent or prismatic, with silicone gaskets and exposed stainless steel or burnished screws.	
Central aluminum sheet cover for access to the tilt adjustment compartment.	
Equipped with an osmotic valve for internal/external pressure balancing.	
Diameter	5.984 in
Height	13.78 in
Weight	9.92 lb
EPA	2.8 ft ²


INSTALLATION

Fixing via adjustable joint with continuous ±45° regulation and locking by means of two M6 grub screws with stainless steel locknuts.

Nebula Compact L | Luminaire


Optic: Wide flood

Screen finish: Transparent

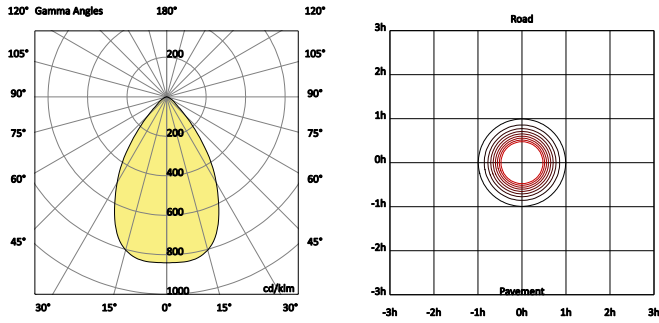


Optic: Flood

Screen finish: Transparent

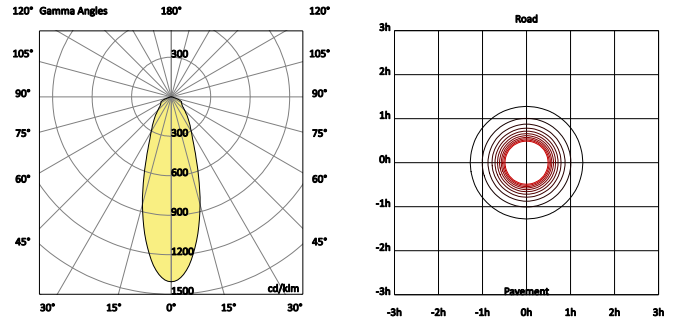


Optic: T2

Screen finish: Prismatic

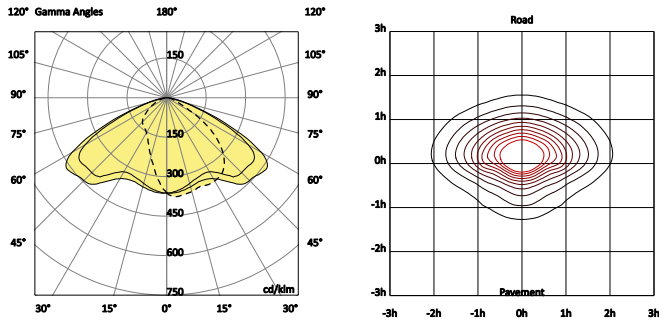


Optic: T4

Screen finish: Prismatic

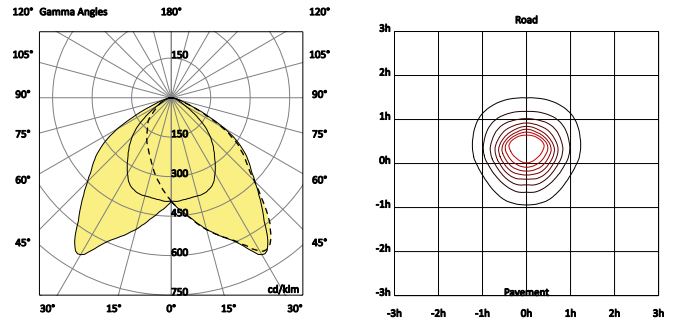


Optic: T5 round

Screen finish: Transparent

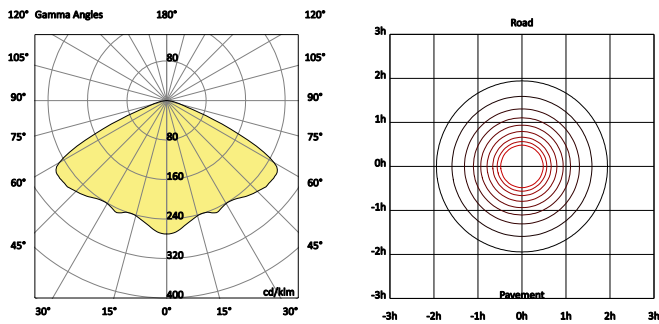

Optic: T5 round

Screen finish: Prismatic

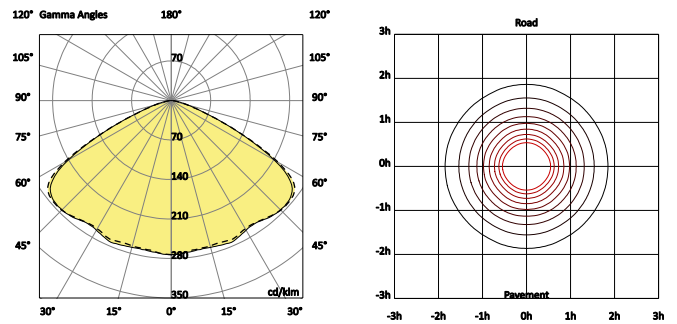

Nebula Compact L | Luminaire

Optic: Wide flood

Screen finish: Transparent

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	21.9	114	1	368	17.7	141	2	0	0
2500 lm	3000 K	20.9	120	1	352	16.9	148	2	0	0
2500 lm	4000 K	20.3	123	1	343	16.4	152	2	0	0
3500 lm	2700 K	30.9	113	1	524	25.4	138	3	0	0
3500 lm	3000 K	29.6	118	1	501	24.3	144	3	0	0
3500 lm	4000 K	28.8	122	1	488	23.6	148	3	0	0
4500 lm	2700 K	40.6	111	1	691	33.9	133	3	0	0
4500 lm	3000 K	38.8	116	1	659	32.3	139	3	0	0
4500 lm	4000 K	37.6	120	1	641	31.3	144	3	0	0
6000 lm	2700 K	55.8	108	1	960	47.7	126	3	0	0
6000 lm	3000 K	53.2	113	1	914	45.3	132	3	0	0
6000 lm	4000 K	51.6	116	1	888	43.9	137	3	0	0

Optic: Flood

Screen finish: Transparent

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	21.9	114	1	368	17.7	141	2	0	0
2500 lm	3000 K	20.9	120	1	352	16.9	148	2	0	0
2500 lm	4000 K	20.3	123	1	343	16.4	152	2	0	0
3500 lm	2700 K	30.9	113	1	524	25.4	138	2	0	0
3500 lm	3000 K	29.6	118	1	501	24.3	144	2	0	0
3500 lm	4000 K	28.8	122	1	488	23.6	148	2	0	0
4500 lm	2700 K	40.6	111	1	691	33.9	133	3	0	0
4500 lm	3000 K	38.8	116	1	659	32.3	139	3	0	0
4500 lm	4000 K	37.6	120	1	641	31.3	144	3	0	0
6000 lm	2700 K	55.8	108	1	960	47.7	126	3	0	0
6000 lm	3000 K	53.2	113	1	914	45.3	132	3	0	0
6000 lm	4000 K	51.6	116	1	888	43.9	137	3	0	0

Optic: T2

Screen finish: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	21.9	114	1	368	17.7	141	1	0	1
2500 lm	3000 K	20.9	120	1	352	16.9	148	1	0	1
2500 lm	4000 K	20.3	123	1	343	16.4	152	1	0	1
3500 lm	2700 K	30.9	113	1	524	25.4	138	1	0	1
3500 lm	3000 K	29.6	118	1	501	24.3	144	1	0	1
3500 lm	4000 K	28.8	122	1	488	23.6	148	1	0	1
4500 lm	2700 K	40.6	111	1	691	33.9	133	1	0	1
4500 lm	3000 K	38.8	116	1	659	32.3	139	1	0	1
4500 lm	4000 K	37.6	120	1	641	31.3	144	1	0	1
6000 lm	2700 K	55.8	108	1	960	47.7	126	2	0	1
6000 lm	3000 K	53.2	113	1	914	45.3	132	2	0	1
6000 lm	4000 K	51.6	116	1	888	43.9	137	2	0	1

Nebula Compact L | Luminaire

Optic: T4

Screen finish: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	21.9	114	1	368	17.7	141	1	0	0
2500 lm	3000 K	20.9	120	1	352	16.9	148	1	0	0
2500 lm	4000 K	20.3	123	1	343	16.4	152	1	0	0
3500 lm	2700 K	30.9	113	1	524	25.4	138	1	0	0
3500 lm	3000 K	29.6	118	1	501	24.3	144	1	0	0
3500 lm	4000 K	28.8	122	1	488	23.6	148	1	0	0
4500 lm	2700 K	40.6	111	1	691	33.9	133	2	0	1
4500 lm	3000 K	38.8	116	1	659	32.3	139	2	0	1
4500 lm	4000 K	37.6	120	1	641	31.3	144	2	0	1
6000 lm	2700 K	55.8	108	1	960	47.7	126	2	0	1
6000 lm	3000 K	53.2	113	1	914	45.3	132	2	0	1
6000 lm	4000 K	51.6	116	1	888	43.9	137	2	0	1

Optic: T5 round

Screen finish: Transparent

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	21.9	114	1	368	17.7	141	1	0	0
2500 lm	3000 K	20.9	120	1	352	16.9	148	1	0	0
2500 lm	4000 K	20.3	123	1	343	16.4	152	1	0	0
3500 lm	2700 K	30.9	113	1	524	25.4	138	2	0	1
3500 lm	3000 K	29.6	118	1	501	24.3	144	2	0	1
3500 lm	4000 K	28.8	122	1	488	23.6	148	2	0	1
4500 lm	2700 K	40.6	111	1	691	33.9	133	2	0	1
4500 lm	3000 K	38.8	116	1	659	32.3	139	2	0	1
4500 lm	4000 K	37.6	120	1	641	31.3	144	2	0	1
6000 lm	2700 K	55.8	108	1	960	47.7	126	2	0	1
6000 lm	3000 K	53.2	113	1	914	45.3	132	2	0	1
6000 lm	4000 K	51.6	116	1	888	43.9	137	2	0	1

Optic: T5 round

Screen finish: Prismatic

System					Source			BUG		
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Backlight	Uplight	Glare
2500 lm	2700 K	21.9	114	1	368	17.7	141	1	0	0
2500 lm	3000 K	20.9	120	1	352	16.9	148	1	0	0
2500 lm	4000 K	20.3	123	1	343	16.4	152	1	0	0
3500 lm	2700 K	30.9	113	1	524	25.4	138	2	0	0
3500 lm	3000 K	29.6	118	1	501	24.3	144	2	0	0
3500 lm	4000 K	28.8	122	1	488	23.6	148	2	0	0
4500 lm	2700 K	40.6	111	1	691	33.9	133	2	0	1
4500 lm	3000 K	38.8	116	1	659	32.3	139	2	0	1
4500 lm	4000 K	37.6	120	1	641	31.3	144	2	0	1
6000 lm	2700 K	55.8	108	1	960	47.7	126	2	0	1
6000 lm	3000 K	53.2	113	1	914	45.3	132	2	0	1
6000 lm	4000 K	51.6	116	1	888	43.9	137	2	0	1