


Nova | Luminaire | Nova

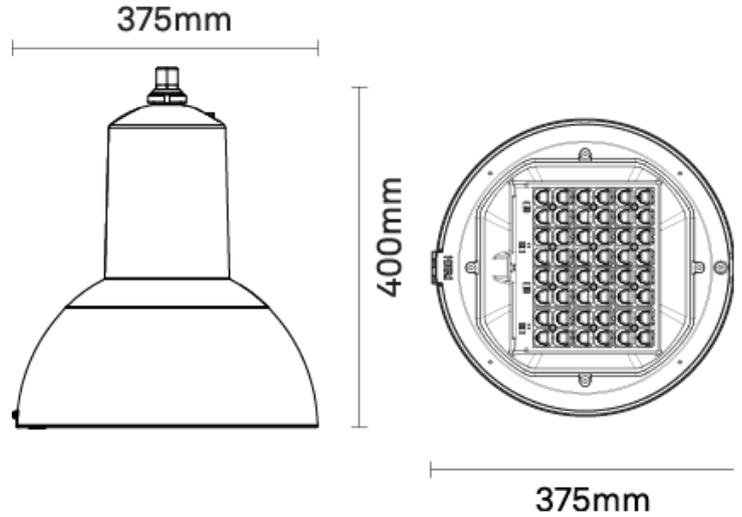

Ordering Information / Guide

Example: **LUNOV00-U-D30-830-L035-SP-V0-F35-MU-CN1**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D28 T1 short	827 Ra80 2700 K	L025 2500 lm	SP Prismatic	V0 120V-277V	F35 0-10V+CLO	MU UL	CN1 Grey [Neri] Textured + White [RAL 9010] Textured
D36 T2 medium	830 Ra80 3000 K	L035 3500 lm					
D22 T3 narrow	840 Ra80 4000 K	L045 4500 lm					
D37 T3 medium		L060 6000 lm					
D24 T4 wide		L075 7500 lm					
D38 T4 medium		L090 9000 lm					
D30 T5 square medium		L105 10500 lm L120 12000 lm					

Generated code: **LUNOV00 - U** - _____

Nova | Luminaire | Nova

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminum (UNI EN 1706) with a bell-shaped upper frame equipped with a G3/4" threaded mounting tube and a skirted lower frame openable via hinge for access to the auxiliary and optical compartment.

Protective shield in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector. Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote monitoring systems.

INSTALLATION

Suspended: threaded connection G3/4".

WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Nova | Luminaire | Nova


T1 short

Prismatic

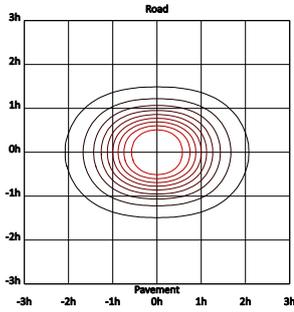


T2 medium

Prismatic

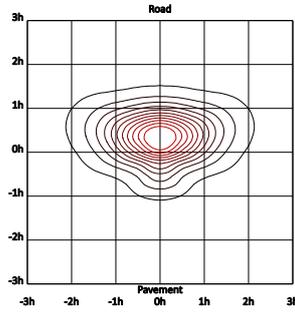


T3 narrow

Prismatic

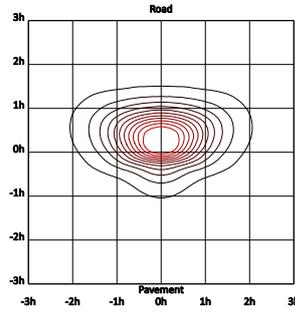


T3 medium

Prismatic

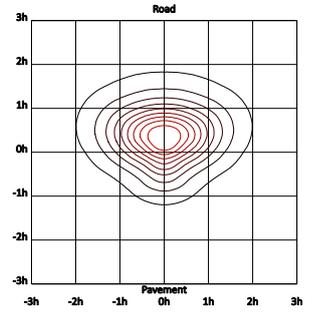


T4 wide

Prismatic

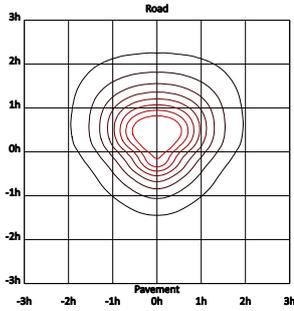


T4 medium

Prismatic

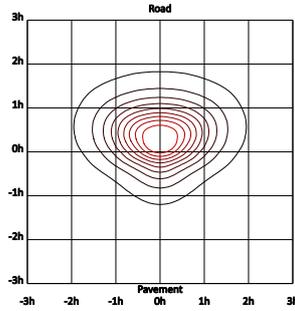

T5 square medium

Prismatic

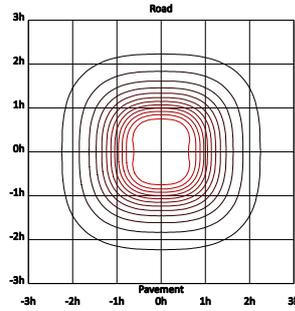

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
3500 lm	2700 K	27.6	127	16	T4 wide	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T5 square medium	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T1 short	Prismatic	2	0	1
3500 lm	2700 K	27.6	127	16	T3 narrow	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T2 medium	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T3 medium	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T4 medium	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T4 wide	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T5 square medium	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T1 short	Prismatic	2	0	1
3500 lm	3000 K	26.1	134	16	T3 narrow	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T2 medium	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T3 medium	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T4 medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T4 wide	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T5 square medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T1 short	Prismatic	2	0	1
3500 lm	4000 K	24.7	142	16	T3 narrow	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T2 medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T3 medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T4 medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T4 wide	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T5 square medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T1 short	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T3 narrow	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T2 medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T3 medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T4 medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T4 wide	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T5 square medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T1 short	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T3 narrow	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T2 medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T3 medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T4 medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T4 wide	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T5 square medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T1 short	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T3 narrow	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T2 medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T3 medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T4 medium	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T4 wide	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T5 square medium	Prismatic	2	0	1
4500 lm	2700 K	36.4	124	16	T1 short	Prismatic	2	0	1
4500 lm	2700 K	36.4	124	16	T3 narrow	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T2 medium	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T3 medium	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T4 medium	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T4 wide	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T5 square medium	Prismatic	2	0	1
4500 lm	3000 K	34.4	131	16	T1 short	Prismatic	2	0	1
4500 lm	3000 K	34.4	131	16	T3 narrow	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T2 medium	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T3 medium	Prismatic	1	0	1

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
4500 lm	3000 K	34.4	131	16	T4 medium	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T4 wide	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T5 square medium	Prismatic	2	0	1
4500 lm	4000 K	32.6	138	16	T1 short	Prismatic	2	0	1
4500 lm	4000 K	32.6	138	16	T3 narrow	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T2 medium	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T3 medium	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T4 medium	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T4 wide	Prismatic	1	0	2
6000 lm	2700 K	47.9	125	24	T5 square medium	Prismatic	2	0	1
6000 lm	2700 K	47.9	125	24	T1 short	Prismatic	2	0	2
6000 lm	2700 K	47.9	125	24	T3 narrow	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T2 medium	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T3 medium	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T4 medium	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T4 wide	Prismatic	1	0	2
6000 lm	3000 K	45.5	132	24	T5 square medium	Prismatic	2	0	1
6000 lm	3000 K	45.5	132	24	T1 short	Prismatic	2	0	2
6000 lm	3000 K	45.5	132	24	T3 narrow	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T2 medium	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T3 medium	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T4 medium	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T4 wide	Prismatic	1	0	2
6000 lm	4000 K	43	140	24	T5 square medium	Prismatic	2	0	1
6000 lm	4000 K	43	140	24	T1 short	Prismatic	2	0	2
6000 lm	4000 K	43	140	24	T3 narrow	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T2 medium	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T3 medium	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T4 medium	Prismatic	1	0	1
7500 lm	2700 K	61.1	123	24	T4 wide	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T5 square medium	Prismatic	3	0	1
7500 lm	2700 K	61.1	123	24	T1 short	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T3 narrow	Prismatic	2	0	1
7500 lm	2700 K	61.1	123	24	T2 medium	Prismatic	2	0	1
7500 lm	2700 K	61.1	123	24	T3 medium	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T4 medium	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T4 wide	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T5 square medium	Prismatic	3	0	1
7500 lm	3000 K	57.8	130	24	T1 short	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T3 narrow	Prismatic	2	0	1
7500 lm	3000 K	57.8	130	24	T2 medium	Prismatic	2	0	1
7500 lm	3000 K	57.8	130	24	T3 medium	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T4 medium	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T4 wide	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T5 square medium	Prismatic	3	0	1
7500 lm	4000 K	54.7	137	24	T1 short	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T3 narrow	Prismatic	2	0	1
7500 lm	4000 K	54.7	137	24	T2 medium	Prismatic	2	0	1
7500 lm	4000 K	54.7	137	24	T3 medium	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T4 medium	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T4 wide	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T5 square medium	Prismatic	3	0	1
9000 lm	2700 K	71.1	127	32	T1 short	Prismatic	3	0	2
9000 lm	2700 K	71.1	127	32	T3 narrow	Prismatic	2	0	1
9000 lm	2700 K	71.1	127	32	T2 medium	Prismatic	2	0	2

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
9000 lm	2700 K	71.1	127	32	T3 medium	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T4 medium	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T4 wide	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T5 square medium	Prismatic	3	0	1
9000 lm	3000 K	67.4	134	32	T1 short	Prismatic	3	0	2
9000 lm	3000 K	67.4	134	32	T3 narrow	Prismatic	2	0	1
9000 lm	3000 K	67.4	134	32	T2 medium	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T3 medium	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T4 medium	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T4 wide	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T5 square medium	Prismatic	3	0	1
9000 lm	4000 K	63.9	141	32	T1 short	Prismatic	3	0	2
9000 lm	4000 K	63.9	141	32	T3 narrow	Prismatic	2	0	1
9000 lm	4000 K	63.9	141	32	T2 medium	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T3 medium	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T4 medium	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T4 wide	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T5 square medium	Prismatic	3	0	1
10500 lm	2700 K	84.2	125	32	T1 short	Prismatic	3	0	3
10500 lm	2700 K	84.2	125	32	T3 narrow	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T2 medium	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T3 medium	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T4 medium	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T4 wide	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T5 square medium	Prismatic	3	0	1
10500 lm	3000 K	79.7	132	32	T1 short	Prismatic	3	0	3
10500 lm	3000 K	79.7	132	32	T3 narrow	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T2 medium	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T3 medium	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T4 medium	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T4 wide	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T5 square medium	Prismatic	3	0	1
10500 lm	4000 K	75.4	139	32	T1 short	Prismatic	3	0	3
10500 lm	4000 K	75.4	139	32	T3 narrow	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T2 medium	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T3 medium	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T4 medium	Prismatic	2	0	2
12000 lm	3000 K	86.7	138	48	T4 wide	Prismatic	2	0	3
12000 lm	3000 K	86.7	138	48	T5 square medium	Prismatic	3	0	2
12000 lm	3000 K	86.7	138	48	T1 short	Prismatic	3	0	3
12000 lm	3000 K	86.7	138	48	T3 narrow	Prismatic	2	0	2
12000 lm	3000 K	86.7	138	48	T2 medium	Prismatic	2	0	2
12000 lm	3000 K	86.7	138	48	T3 medium	Prismatic	2	0	2
12000 lm	3000 K	86.7	138	48	T4 medium	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T4 wide	Prismatic	2	0	3
12000 lm	4000 K	82.1	146	48	T5 square medium	Prismatic	3	0	2
12000 lm	4000 K	82.1	146	48	T1 short	Prismatic	3	0	3
12000 lm	4000 K	82.1	146	48	T3 narrow	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T2 medium	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T3 medium	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T4 medium	Prismatic	2	0	2