


Nova | Luminaire | Nova

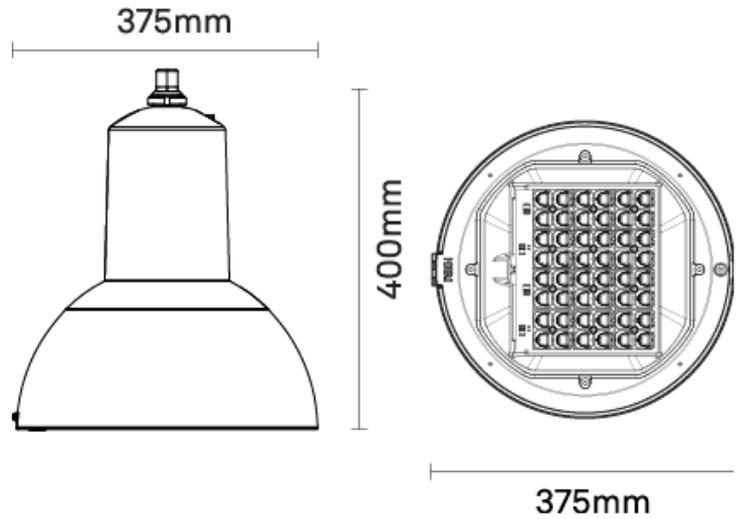

Ordering Information / Guide

Example: **LUNOV00-N-D28-730-L025-ST-V1-F02-M2-CN1**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D28 Type I - Center road	722 Ra70 2200 K	L015 1500 lm	ST Transparent	V1 220V-240V	F02 1-10V+CLO	M2 Class II	CN1 Grey [Neri] Textured + White [RAL 9010] Textured
D36 Type II - Asymmetric	727 Ra70 2700 K	L025 2500 lm	SP Prismatic		F06 DALI+CLO		
D22 Type III - B	730 Ra70 3000 K	L035 3500 lm			F14 NVL6H+CLO		
D25 Type III - C	740 Ra70 4000 K	L045 4500 lm					
D37 Type III - Asymmetric		L060 6000 lm					
D24 Type IV - Forward throw		L075 7500 lm					
D38 Type IV - C		L090 9000 lm					
D30 Type V - Rotosymmetric		L105 10500 lm					
		L120 12000 lm					

Generated code: **LUNOV00 - N -** _____

Nova | Luminaire | Nova

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

ELECTRICAL CHARACTERISTICS

ENEC safety mark.

MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminium (UNI EN 1706) with a bell-shaped upper frame equipped with a G3/4" threaded mounting tube and a skirted lower frame openable via hinge for access to the auxiliary and optical compartment.

Protective screen in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector.

Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote control systems.

INSTALLATION

Suspended: threaded connection G3/4".

WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Nova | Luminaire | Nova


Type I - Center road

Transparent

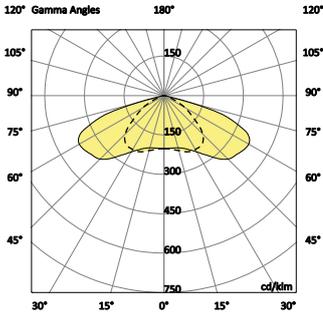


Type I - Center road

Prismatic

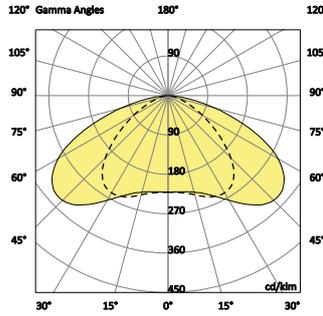


Type II - Asymmetric

Transparent

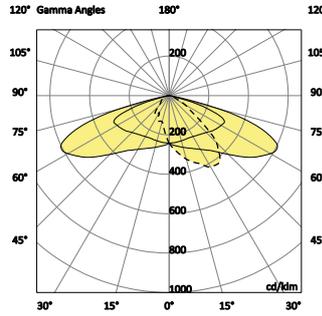


Type II - Asymmetric

Prismatic

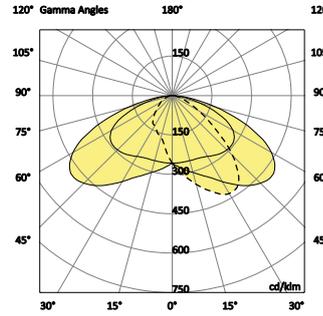


Type III - B

Transparent

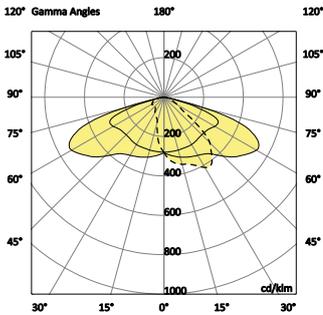


Type III - B

Prismatic

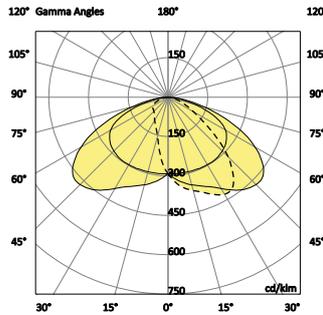


Type III - C

Transparent

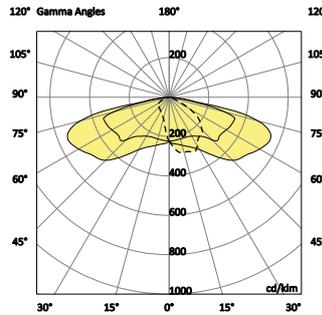


Type III - C

Prismatic

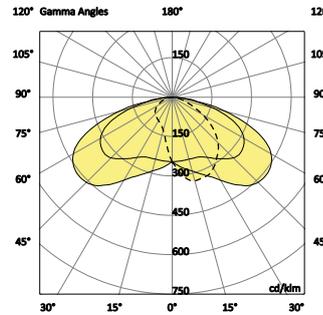


Type III - Asymmetric

Transparent

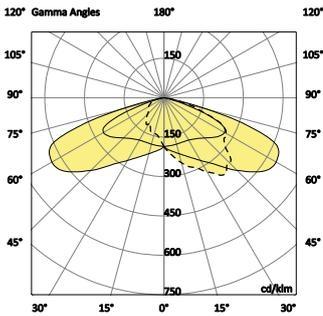


Type III - Asymmetric

Prismatic

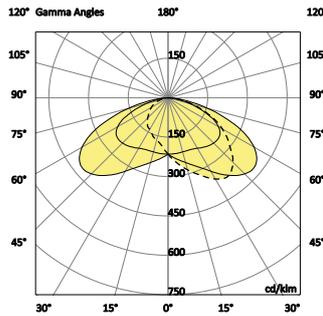


Type IV - Forward throw

Transparent

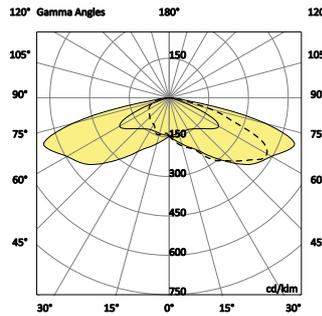


Type IV - Forward throw

Prismatic

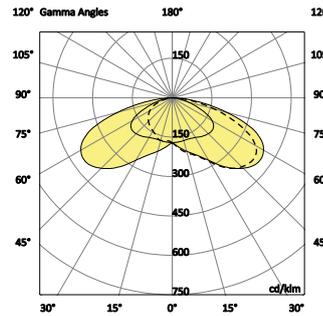


Type IV - C

Transparent

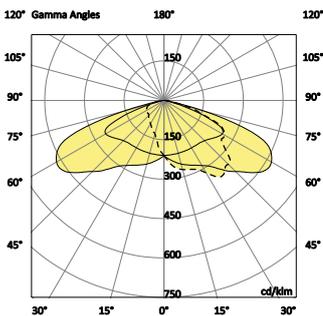


Type IV - C

Prismatic

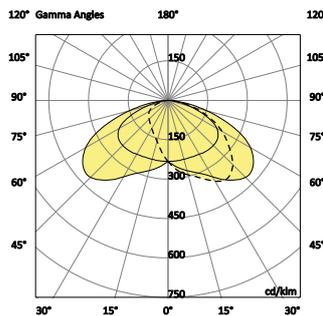


Type V - Rotosymmetric

Transparent

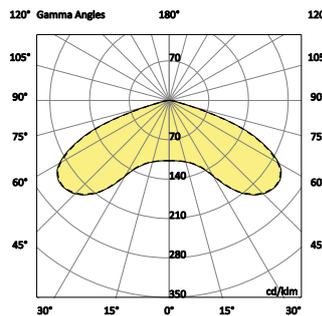

Type V - Rotosymmetric

Prismatic

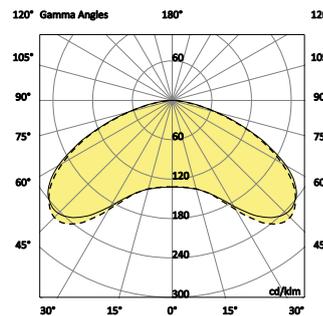

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
2500 lm	2700 K	17.9	140	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	2700 K	17.9	140	16	Type I - Center road	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type III - B	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type III - C	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type IV - C	Transparent	1	0	1
2500 lm	2700 K	18	139	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type I - Center road	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type III - B	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type III - C	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type IV - C	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	3000 K	17.2	145	16	Type I - Center road	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - B	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - C	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type IV - C	Transparent	1	0	1
2500 lm	3000 K	17	147	16	Type III - B	Prismatic	1	0	1
2500 lm	3000 K	17	147	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	17	147	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	17	147	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type I - Center road	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type III - B	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type III - C	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type IV - C	Prismatic	1	0	1
2500 lm	4000 K	16.6	151	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	4000 K	16.6	151	16	Type I - Center road	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type III - B	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type III - C	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type IV - C	Transparent	1	0	1
2500 lm	4000 K	16.7	150	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type I - Center road	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type III - B	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type III - C	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type IV - C	Prismatic	1	0	1
2500 lm	2200 K	19.7	127	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	2200 K	19.7	127	16	Type I - Center road	Transparent	1	0	1

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
2500 lm	2200 K	19.7	127	16	Type III - B	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type III - C	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type IV - C	Transparent	1	0	1
2500 lm	2200 K	19.9	126	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type I - Center road	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - B	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - C	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type IV - C	Prismatic	1	0	1
3500 lm	2700 K	24.3	144	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	2700 K	24.3	144	16	Type I - Center road	Transparent	2	0	1
3500 lm	2700 K	24.3	144	16	Type III - B	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type III - C	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type IV - C	Transparent	1	0	1
3500 lm	2700 K	24.5	143	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type I - Center road	Prismatic	2	0	1
3500 lm	2700 K	24.5	143	16	Type III - B	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type III - C	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type IV - C	Prismatic	1	0	1
3500 lm	3000 K	23.5	149	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	3000 K	23.5	149	16	Type I - Center road	Transparent	2	0	1
3500 lm	3000 K	23.5	149	16	Type III - B	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type III - C	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type IV - C	Transparent	1	0	1
3500 lm	3000 K	23.1	152	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	3000 K	23.1	152	16	Type III - C	Transparent	1	0	1
3500 lm	3000 K	23.1	152	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	23.6	148	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type I - Center road	Prismatic	2	0	1
3500 lm	3000 K	23.6	148	16	Type III - B	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type III - C	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type IV - C	Prismatic	1	0	1
3500 lm	4000 K	22.5	156	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	4000 K	22.5	156	16	Type I - Center road	Transparent	2	0	1
3500 lm	4000 K	22.5	156	16	Type III - B	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type III - C	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type III - Asymmetric	Transparent	1	0	1

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
3500 lm	4000 K	22.5	156	16	Type IV - C	Transparent	1	0	1
3500 lm	4000 K	22.7	154	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type I - Center road	Prismatic	2	0	1
3500 lm	4000 K	22.7	154	16	Type III - B	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type III - C	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type IV - C	Prismatic	1	0	1
3500 lm	2200 K	26.9	130	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	2200 K	26.9	130	16	Type I - Center road	Transparent	2	0	1
3500 lm	2200 K	26.9	130	16	Type III - B	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type III - C	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type IV - C	Transparent	1	0	1
3500 lm	2200 K	27.1	129	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type I - Center road	Prismatic	2	0	1
3500 lm	2200 K	27.1	129	16	Type III - B	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type III - C	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type IV - C	Prismatic	1	0	1
4500 lm	2700 K	31	145	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2700 K	31	145	16	Type I - Center road	Transparent	2	0	1
4500 lm	2700 K	31	145	16	Type III - B	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type III - C	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type IV - C	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	2700 K	31.3	144	16	Type I - Center road	Prismatic	2	0	1
4500 lm	2700 K	31.3	144	16	Type III - B	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type III - C	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type IV - C	Prismatic	1	0	1
4500 lm	3000 K	29.3	154	16	Type I - Center road	Transparent	2	0	1
4500 lm	3000 K	29.8	151	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	3000 K	29.8	151	16	Type I - Center road	Transparent	2	0	1
4500 lm	3000 K	29.8	151	16	Type III - B	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type III - C	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type IV - C	Transparent	1	0	1
4500 lm	3000 K	30	150	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	3000 K	30	150	16	Type I - Center road	Prismatic	2	0	1
4500 lm	3000 K	30	150	16	Type III - B	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type III - C	Prismatic	1	0	1

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
4500 lm	3000 K	30	150	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type IV - C	Prismatic	1	0	1
4500 lm	4000 K	28.6	157	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	4000 K	28.6	157	16	Type I - Center road	Transparent	2	0	1
4500 lm	4000 K	28.6	157	16	Type III - B	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type III - C	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type IV - C	Transparent	1	0	1
4500 lm	4000 K	28.9	156	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	4000 K	28.9	156	16	Type I - Center road	Prismatic	2	0	1
4500 lm	4000 K	28.9	156	16	Type III - B	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type III - C	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type IV - C	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	2200 K	33.3	135	24	Type I - Center road	Prismatic	2	0	1
4500 lm	2200 K	33.3	135	24	Type III - B	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type III - C	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type IV - C	Prismatic	1	0	1
4500 lm	2200 K	33.1	136	24	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2200 K	33.1	136	24	Type I - Center road	Transparent	2	0	1
4500 lm	2200 K	33.1	136	24	Type III - B	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type III - C	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type IV - C	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	2700 K	40	150	24	Type I - Center road	Transparent	2	0	2
6000 lm	2700 K	40	150	24	Type III - B	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type III - C	Transparent	2	0	2
6000 lm	2700 K	40	150	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type IV - C	Transparent	1	0	1
6000 lm	2700 K	38.7	155	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2700 K	38.7	155	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	2700 K	38.7	155	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	2700 K	40.2	149	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	2700 K	40.2	149	24	Type I - Center road	Prismatic	2	0	2
6000 lm	2700 K	40.2	149	24	Type III - B	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type III - C	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type IV - C	Prismatic	1	0	1
6000 lm	3000 K	39.8	151	24	Type IV - Forward throw	Transparent	1	0	1

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
6000 lm	3000 K	39.8	151	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	3000 K	39.8	151	24	Type I - Center road	Transparent	2	0	2
6000 lm	3000 K	39.8	151	24	Type III - B	Transparent	1	0	1
6000 lm	3000 K	39.8	151	24	Type III - C	Transparent	2	0	2
6000 lm	3000 K	39.8	151	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	39.8	151	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	39.8	151	24	Type IV - C	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	3000 K	38.3	157	24	Type I - Center road	Transparent	2	0	2
6000 lm	3000 K	38.3	157	24	Type III - B	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type III - C	Transparent	2	0	2
6000 lm	3000 K	38.3	157	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type IV - C	Transparent	1	0	1
6000 lm	3000 K	40	150	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	3000 K	40	150	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	3000 K	40	150	24	Type I - Center road	Prismatic	2	0	2
6000 lm	3000 K	40	150	24	Type III - B	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type III - C	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type IV - C	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	3000 K	38.5	156	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	3000 K	38.5	156	24	Type I - Center road	Prismatic	2	0	2
6000 lm	3000 K	38.5	156	24	Type III - B	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type III - C	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type IV - C	Prismatic	1	0	1
6000 lm	4000 K	36.5	164	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	4000 K	36.5	164	24	Type I - Center road	Transparent	2	0	2
6000 lm	4000 K	36.5	164	24	Type III - B	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type III - C	Transparent	2	0	2
6000 lm	4000 K	36.5	164	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type IV - C	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	4000 K	36.8	163	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	4000 K	36.8	163	24	Type I - Center road	Prismatic	2	0	2
6000 lm	4000 K	36.8	163	24	Type III - B	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type III - C	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type IV - C	Prismatic	1	0	1
6000 lm	4000 K	35.8	168	24	Type III - C	Transparent	2	0	2
6000 lm	2200 K	46.3	130	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2200 K	46.3	130	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	2200 K	46.3	130	24	Type I - Center road	Transparent	2	0	2
6000 lm	2200 K	46.3	130	24	Type III - B	Transparent	1	0	1
6000 lm	2200 K	46.3	130	24	Type III - C	Transparent	2	0	2
6000 lm	2200 K	46.3	130	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2200 K	46.3	130	24	Type III - Asymmetric	Transparent	1	0	1

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
6000 lm	2200 K	46.3	130	24	Type IV - C	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	2200 K	46.6	129	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	2200 K	46.6	129	24	Type I - Center road	Prismatic	2	0	2
6000 lm	2200 K	46.6	129	24	Type III - B	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type III - C	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type IV - C	Prismatic	1	0	1
7500 lm	2700 K	52.1	144	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	2700 K	52.1	144	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	2700 K	52.1	144	24	Type I - Center road	Transparent	2	0	2
7500 lm	2700 K	52.1	144	24	Type III - B	Transparent	2	0	1
7500 lm	2700 K	52.1	144	24	Type III - C	Transparent	2	0	2
7500 lm	2700 K	52.1	144	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	2700 K	52.1	144	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	2700 K	52.1	144	24	Type IV - C	Transparent	1	0	1
7500 lm	2700 K	50.6	148	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	2700 K	50.6	148	24	Type IV - C	Transparent	1	0	1
7500 lm	2700 K	52.4	143	24	Type IV - Forward throw	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	2700 K	52.4	143	24	Type I - Center road	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type III - B	Prismatic	2	0	1
7500 lm	2700 K	52.4	143	24	Type III - C	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	2700 K	52.4	143	24	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type IV - C	Prismatic	2	0	2
7500 lm	3000 K	50	150	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	3000 K	50	150	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	3000 K	50	150	24	Type I - Center road	Transparent	2	0	2
7500 lm	3000 K	50	150	24	Type III - B	Transparent	2	0	1
7500 lm	3000 K	50	150	24	Type III - C	Transparent	2	0	2
7500 lm	3000 K	50	150	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	3000 K	50	150	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	3000 K	50	150	24	Type IV - C	Transparent	1	0	1
7500 lm	3000 K	49.2	152	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	3000 K	49.2	152	24	Type I - Center road	Transparent	2	0	2
7500 lm	3000 K	50.4	149	24	Type IV - Forward throw	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	3000 K	50.4	149	24	Type I - Center road	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type III - B	Prismatic	2	0	1
7500 lm	3000 K	50.4	149	24	Type III - C	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	3000 K	50.4	149	24	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type IV - C	Prismatic	2	0	2
7500 lm	4000 K	47.8	157	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	4000 K	47.8	157	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	4000 K	47.8	157	24	Type I - Center road	Transparent	2	0	2
7500 lm	4000 K	47.8	157	24	Type III - B	Transparent	2	0	1
7500 lm	4000 K	47.8	157	24	Type III - C	Transparent	2	0	2
7500 lm	4000 K	47.8	157	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	4000 K	47.8	157	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	4000 K	47.8	157	24	Type IV - C	Transparent	1	0	1
7500 lm	4000 K	46.9	160	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	4000 K	48.1	156	24	Type IV - Forward throw	Prismatic	2	0	2

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7500 lm	4000 K	48.1	156	24	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	4000 K	48.1	156	24	Type I - Center road	Prismatic	2	0	2
7500 lm	4000 K	48.1	156	24	Type III - B	Prismatic	2	0	1
7500 lm	4000 K	48.1	156	24	Type III - C	Prismatic	2	0	2
7500 lm	4000 K	48.1	156	24	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	4000 K	48.1	156	24	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	4000 K	48.1	156	24	Type IV - C	Prismatic	2	0	2
7500 lm	2200 K	56.2	133	32	Type IV - Forward throw	Transparent	2	0	2
7500 lm	2200 K	56.2	133	32	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	2200 K	56.2	133	32	Type I - Center road	Transparent	2	0	2
7500 lm	2200 K	56.2	133	32	Type III - B	Transparent	2	0	1
7500 lm	2200 K	56.2	133	32	Type III - C	Transparent	2	0	2
7500 lm	2200 K	56.2	133	32	Type II - Asymmetric	Transparent	2	0	1
7500 lm	2200 K	56.2	133	32	Type III - Asymmetric	Transparent	1	0	2
7500 lm	2200 K	56.2	133	32	Type IV - C	Transparent	1	0	1
7500 lm	2200 K	56.5	133	32	Type IV - Forward throw	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	2200 K	56.5	133	32	Type I - Center road	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type III - B	Prismatic	2	0	1
7500 lm	2200 K	56.5	133	32	Type III - C	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	2200 K	56.5	133	32	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type IV - C	Prismatic	2	0	2
9000 lm	2700 K	60.7	148	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	2700 K	60.7	148	32	Type I - Center road	Transparent	3	0	2
9000 lm	2700 K	60.7	148	32	Type III - B	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type III - C	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	2700 K	60.7	148	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type IV - C	Transparent	2	0	2
9000 lm	2700 K	61.1	147	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	2700 K	61.1	147	32	Type I - Center road	Prismatic	3	0	2
9000 lm	2700 K	61.1	147	32	Type III - B	Prismatic	2	0	1
9000 lm	2700 K	61.1	147	32	Type III - C	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type II - Asymmetric	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type IV - C	Prismatic	2	0	2
9000 lm	3000 K	58.2	155	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	3000 K	58.2	155	32	Type I - Center road	Transparent	3	0	2
9000 lm	3000 K	58.2	155	32	Type III - B	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type III - C	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	3000 K	58.2	155	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type IV - C	Transparent	2	0	2
9000 lm	3000 K	58.6	154	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	3000 K	58.6	154	32	Type I - Center road	Prismatic	3	0	2
9000 lm	3000 K	58.6	154	32	Type III - B	Prismatic	2	0	1
9000 lm	3000 K	58.6	154	32	Type III - C	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type II - Asymmetric	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type IV - C	Prismatic	2	0	2

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
9000 lm	4000 K	55.7	162	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	4000 K	55.7	162	32	Type I - Center road	Transparent	3	0	2
9000 lm	4000 K	55.7	162	32	Type III - B	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type III - C	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	4000 K	55.7	162	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type IV - C	Transparent	2	0	2
9000 lm	4000 K	56	161	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	4000 K	56	161	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	4000 K	56	161	32	Type I - Center road	Prismatic	3	0	2
9000 lm	4000 K	56	161	32	Type III - B	Prismatic	2	0	1
9000 lm	4000 K	56	161	32	Type III - C	Prismatic	2	0	2
9000 lm	4000 K	56	161	32	Type II - Asymmetric	Prismatic	2	0	2
9000 lm	4000 K	56	161	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	4000 K	56	161	32	Type IV - C	Prismatic	2	0	2
9000 lm	2200 K	68.4	132	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	2200 K	68.4	132	32	Type I - Center road	Transparent	3	0	2
9000 lm	2200 K	68.4	132	32	Type III - B	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type III - C	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	2200 K	68.4	132	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type IV - C	Transparent	2	0	2
9000 lm	2200 K	68.9	131	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	2200 K	68.9	131	32	Type I - Center road	Prismatic	3	0	2
9000 lm	2200 K	68.9	131	32	Type III - B	Prismatic	2	0	1
9000 lm	2200 K	68.9	131	32	Type III - C	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type II - Asymmetric	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type IV - C	Prismatic	2	0	2
10500 lm	2700 K	71.9	146	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	2700 K	71.9	146	32	Type I - Center road	Transparent	3	0	3
10500 lm	2700 K	71.9	146	32	Type III - B	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type III - C	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type IV - C	Transparent	2	0	2
10500 lm	2700 K	72.5	145	32	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	2700 K	72.5	145	32	Type I - Center road	Prismatic	3	0	3
10500 lm	2700 K	72.5	145	32	Type III - B	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type III - C	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type IV - C	Prismatic	2	0	2
10500 lm	3000 K	68.9	152	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	3000 K	68.9	152	32	Type I - Center road	Transparent	3	0	3
10500 lm	3000 K	68.9	152	32	Type III - B	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type III - C	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type III - Asymmetric	Transparent	2	0	2

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
10500 lm	3000 K	68.9	152	32	Type IV - C	Transparent	2	0	2
10500 lm	3000 K	69.3	152	32	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	3000 K	69.3	152	32	Type I - Center road	Prismatic	3	0	3
10500 lm	3000 K	69.3	152	32	Type III - B	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type III - C	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type IV - C	Prismatic	2	0	2
10500 lm	4000 K	65.7	160	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	4000 K	65.7	160	32	Type I - Center road	Transparent	3	0	3
10500 lm	4000 K	65.7	160	32	Type III - B	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type III - C	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type IV - C	Transparent	2	0	2
10500 lm	4000 K	66.1	159	32	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	4000 K	66.1	159	32	Type I - Center road	Prismatic	3	0	3
10500 lm	4000 K	66.1	159	32	Type III - B	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type III - C	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type IV - C	Prismatic	2	0	2
10500 lm	2200 K	77.3	136	48	Type IV - Forward throw	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	2200 K	77.3	136	48	Type I - Center road	Transparent	3	0	3
10500 lm	2200 K	77.3	136	48	Type III - B	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type III - C	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type II - Asymmetric	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type III - Asymmetric	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type IV - C	Transparent	2	0	2
10500 lm	2200 K	77.9	135	48	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	2200 K	77.9	135	48	Type I - Center road	Prismatic	3	0	3
10500 lm	2200 K	77.9	135	48	Type III - B	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type III - C	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type IV - C	Prismatic	2	0	2
12000 lm	2700 K	79.3	151	48	Type IV - Forward throw	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	2700 K	79.3	151	48	Type I - Center road	Transparent	3	0	3
12000 lm	2700 K	79.3	151	48	Type III - B	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type III - C	Transparent	3	0	3
12000 lm	2700 K	79.3	151	48	Type II - Asymmetric	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type III - Asymmetric	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type IV - C	Transparent	2	0	2
12000 lm	2700 K	79.9	150	48	Type IV - Forward throw	Prismatic	2	0	3
12000 lm	2700 K	79.9	150	48	Type V - Rotosymmetric	Prismatic	3	0	2
12000 lm	2700 K	79.9	150	48	Type I - Center road	Prismatic	3	0	3
12000 lm	2700 K	79.9	150	48	Type III - B	Prismatic	2	0	2
12000 lm	2700 K	79.9	150	48	Type III - C	Prismatic	2	0	2
12000 lm	2700 K	79.9	150	48	Type II - Asymmetric	Prismatic	2	0	2

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
12000 lm	2700 K	79.9	150	48	Type III - Asymmetric	Prismatic	2	0	2
12000 lm	2700 K	79.9	150	48	Type IV - C	Prismatic	2	0	2
12000 lm	3000 K	76.2	157	48	Type IV - Forward throw	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	3000 K	76.2	157	48	Type I - Center road	Transparent	3	0	3
12000 lm	3000 K	76.2	157	48	Type III - B	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type III - C	Transparent	3	0	3
12000 lm	3000 K	76.2	157	48	Type II - Asymmetric	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type III - Asymmetric	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type IV - C	Transparent	2	0	2
12000 lm	3000 K	74.9	160	48	Type IV - Forward throw	Transparent	2	0	2
12000 lm	3000 K	76.8	156	48	Type IV - Forward throw	Prismatic	2	0	3
12000 lm	3000 K	76.8	156	48	Type V - Rotosymmetric	Prismatic	3	0	2
12000 lm	3000 K	76.8	156	48	Type I - Center road	Prismatic	3	0	3
12000 lm	3000 K	76.8	156	48	Type III - B	Prismatic	2	0	2
12000 lm	3000 K	76.8	156	48	Type III - C	Prismatic	2	0	2
12000 lm	3000 K	76.8	156	48	Type II - Asymmetric	Prismatic	2	0	2
12000 lm	3000 K	76.8	156	48	Type III - Asymmetric	Prismatic	2	0	2
12000 lm	3000 K	76.8	156	48	Type IV - C	Prismatic	2	0	2
12000 lm	4000 K	72.9	165	48	Type IV - Forward throw	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	4000 K	72.9	165	48	Type I - Center road	Transparent	3	0	3
12000 lm	4000 K	72.9	165	48	Type III - B	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type III - C	Transparent	3	0	3
12000 lm	4000 K	72.9	165	48	Type II - Asymmetric	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type III - Asymmetric	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type IV - C	Transparent	2	0	2
12000 lm	4000 K	73.4	163	48	Type IV - Forward throw	Prismatic	2	0	3
12000 lm	4000 K	73.4	163	48	Type V - Rotosymmetric	Prismatic	3	0	2
12000 lm	4000 K	73.4	163	48	Type I - Center road	Prismatic	3	0	3
12000 lm	4000 K	73.4	163	48	Type III - B	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type III - C	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type II - Asymmetric	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type III - Asymmetric	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type IV - C	Prismatic	2	0	2
1500 lm	2700 K	11.2	134	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	2700 K	11.2	134	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	2700 K	11.2	134	16	Type I - Center road	Transparent	1	0	1
1500 lm	2700 K	11.2	134	16	Type III - B	Transparent	0	0	0
1500 lm	2700 K	11.2	134	16	Type III - C	Transparent	1	0	1
1500 lm	2700 K	11.2	134	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	2700 K	11.2	134	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	2700 K	11.2	134	16	Type IV - C	Transparent	0	0	0
1500 lm	2700 K	11.3	133	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type I - Center road	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type III - B	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type III - C	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	2700 K	11.3	133	16	Type IV - C	Prismatic	0	0	1
1500 lm	3000 K	10.9	138	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	3000 K	10.9	138	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	3000 K	10.9	138	16	Type I - Center road	Transparent	1	0	1
1500 lm	3000 K	10.9	138	16	Type III - B	Transparent	0	0	0

Nova | Luminaire | Nova

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
1500 lm	3000 K	10.9	138	16	Type III - C	Transparent	1	0	1
1500 lm	3000 K	10.9	138	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	3000 K	10.9	138	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	3000 K	10.9	138	16	Type IV - C	Transparent	0	0	0
1500 lm	3000 K	11	136	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type I - Center road	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type III - B	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type III - C	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	3000 K	11	136	16	Type IV - C	Prismatic	0	0	1
1500 lm	4000 K	10.5	143	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	4000 K	10.5	143	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	4000 K	10.5	143	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type I - Center road	Transparent	1	0	1
1500 lm	4000 K	10.5	143	16	Type I - Center road	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - B	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type III - B	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - C	Transparent	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - C	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	4000 K	10.5	143	16	Type IV - C	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type IV - C	Prismatic	0	0	1
1500 lm	2200 K	12.4	121	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	2200 K	12.4	121	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	2200 K	12.4	121	16	Type I - Center road	Transparent	1	0	1
1500 lm	2200 K	12.4	121	16	Type III - B	Transparent	0	0	0
1500 lm	2200 K	12.4	121	16	Type III - C	Transparent	1	0	1
1500 lm	2200 K	12.4	121	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	2200 K	12.4	121	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	2200 K	12.4	121	16	Type IV - C	Transparent	0	0	0
1500 lm	2200 K	12.5	120	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type I - Center road	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type III - B	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type III - C	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	2200 K	12.5	120	16	Type IV - C	Prismatic	0	0	1