


## Nova M | Luminaire | Nova M

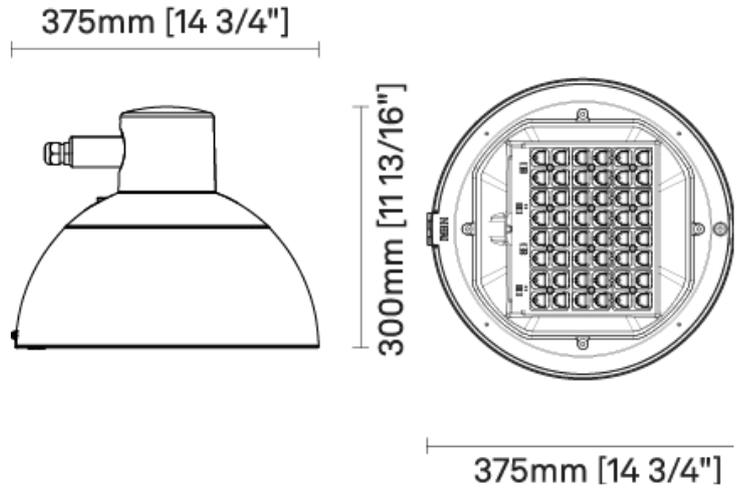

Ordering Information / Guide

Example: **LUNOVMO-U-D28-830-L025-SP-V0-F35-MU-CN1**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
<b>D28</b> T1 short	<b>827</b> Ra80 2700 K	<b>L025</b> 2500 lm	<b>SP</b> Prismatic	<b>V0</b> 120V-277V	<b>F35</b> 0-10V+CLO	<b>MU</b> UL	<b>CN1</b> Grey [Neri] Textured + White [RAL 9010] Textured
<b>D46</b> AFR/SPORT N	<b>830</b> Ra80 3000 K	<b>L035</b> 3500 lm		<b>V3</b> 347V-480V			
<b>D36</b> T2 medium	<b>840</b> Ra80 4000 K	<b>L045</b> 4500 lm					
<b>D47</b> AFR/SPORT W		<b>L060</b> 6000 lm					
<b>D48</b> T2 wide		<b>L075</b> 7500 lm					
<b>D22</b> T3 narrow		<b>L090</b> 9000 lm					
<b>D25</b> T2 narrow		<b>L105</b> 10500 lm					
<b>D37</b> T3 medium		<b>L120</b> 12000 lm					
<b>D24</b> T4 wide							
<b>D38</b> T4 medium							
<b>D30</b> T5 square medium							
<b>D49</b> T5 Round							
<b>D51</b> Left corner							
<b>D23</b> Right corner							

Generated code: **LUNOVMO - U** - \_\_\_\_\_

## Nova M | Luminaire | Nova M

### SOURCE

High-power LED matrix.

**Standard Deviation Colour Matching** ≤5

### LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

### MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminum (UNI EN 1706) with a cylindrical upper frame for housing the internal component and a lower frame openable via hinge for access to the auxiliary and optical compartment.

Protective shield in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector.

Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote monitoring systems.

### INSTALLATION

Suitable for side mounting only on Nova system tips.

### WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

## Nova M | Luminaire | Nova M


T1 short

Prismatic

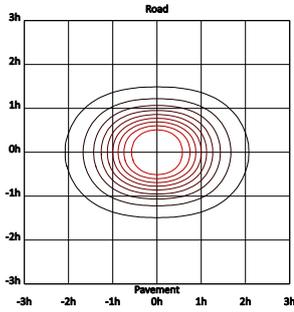


T2 medium

Prismatic

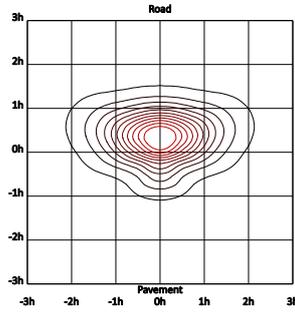


T2 wide

Prismatic

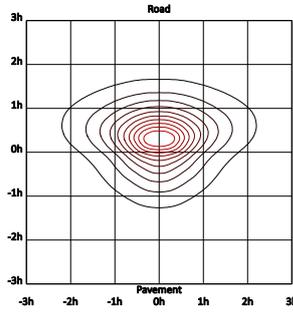


T3 narrow

Prismatic

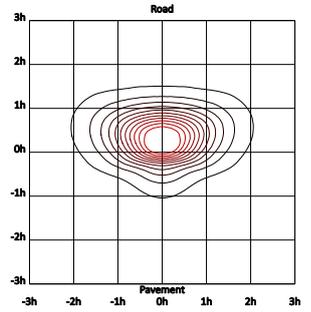


T2 narrow

Prismatic

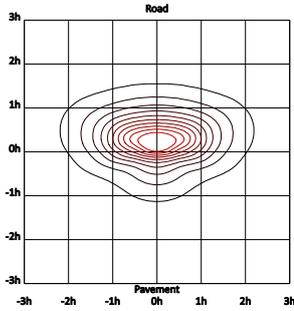


T3 medium

Prismatic

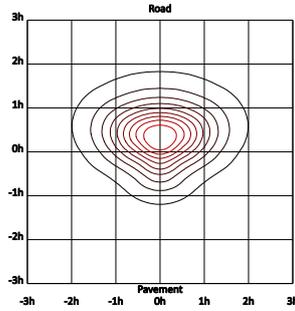


T4 wide

Prismatic

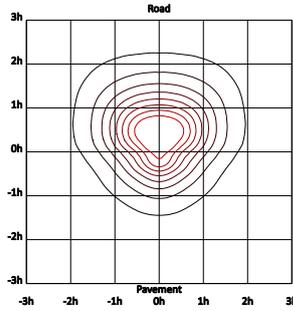


T4 medium

Prismatic

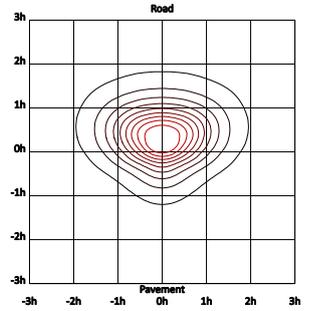


T5 square medium

Prismatic

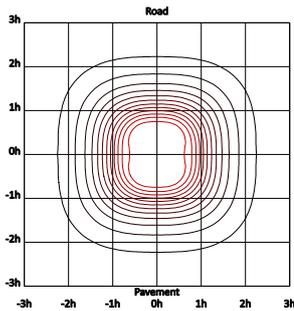


T5 Round

Prismatic

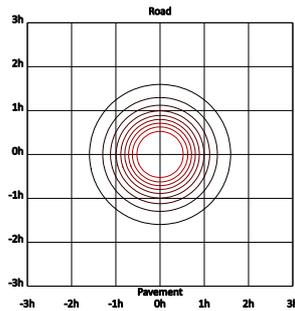


Left corner

Prismatic

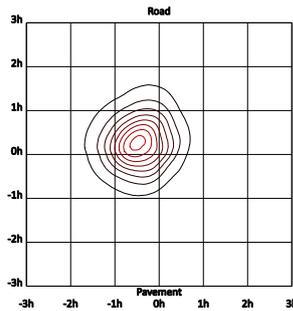

Right corner

Prismatic

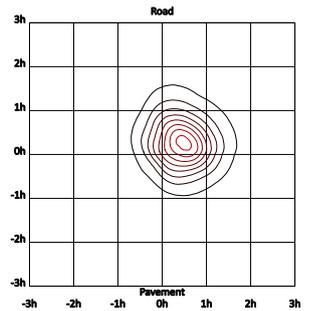

## Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
2500 lm	2700 K	19.2	130	16	T4 wide	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T5 square medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T1 short	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T3 narrow	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T2 narrow	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T2 medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T3 medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T4 medium	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	Right corner	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T2 wide	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	T5 Round	Prismatic	1	0	1
2500 lm	2700 K	19.2	130	16	Left corner	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T4 wide	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T5 square medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T1 short	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T3 narrow	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T2 narrow	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T2 medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T3 medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T4 medium	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	Right corner	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T2 wide	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	T5 Round	Prismatic	1	0	1
2500 lm	3000 K	18.2	137	16	Left corner	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T4 wide	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T5 square medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T1 short	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T3 narrow	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T2 narrow	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T2 medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T3 medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T4 medium	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	Right corner	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T2 wide	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	T5 Round	Prismatic	1	0	1
2500 lm	4000 K	17.3	145	16	Left corner	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T4 wide	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T5 square medium	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T1 short	Prismatic	2	0	1
3500 lm	2700 K	27.6	127	16	T3 narrow	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T2 narrow	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T2 medium	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T3 medium	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T4 medium	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	Right corner	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T2 wide	Prismatic	1	0	1
3500 lm	2700 K	27.6	127	16	T5 Round	Prismatic	2	0	1
3500 lm	2700 K	27.6	127	16	Left corner	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T4 wide	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T5 square medium	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T1 short	Prismatic	2	0	1
3500 lm	3000 K	26.1	134	16	T3 narrow	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T2 narrow	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T2 medium	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T3 medium	Prismatic	1	0	1

## Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
3500 lm	3000 K	26.1	134	16	T4 medium	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	Right corner	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T2 wide	Prismatic	1	0	1
3500 lm	3000 K	26.1	134	16	T5 Round	Prismatic	2	0	1
3500 lm	3000 K	26.1	134	16	Left corner	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T4 wide	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T5 square medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T1 short	Prismatic	2	0	1
3500 lm	4000 K	24.7	142	16	T3 narrow	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T2 narrow	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T2 medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T3 medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T4 medium	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	Right corner	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T2 wide	Prismatic	1	0	1
3500 lm	4000 K	24.7	142	16	T5 Round	Prismatic	2	0	1
3500 lm	4000 K	24.7	142	16	Left corner	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T4 wide	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T5 square medium	Prismatic	2	0	1
4500 lm	2700 K	36.4	124	16	T1 short	Prismatic	2	0	1
4500 lm	2700 K	36.4	124	16	T3 narrow	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T2 narrow	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T2 medium	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T3 medium	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T4 medium	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	Right corner	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T2 wide	Prismatic	1	0	1
4500 lm	2700 K	36.4	124	16	T5 Round	Prismatic	2	0	1
4500 lm	2700 K	36.4	124	16	Left corner	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T4 wide	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T5 square medium	Prismatic	2	0	1
4500 lm	3000 K	34.4	131	16	T1 short	Prismatic	2	0	1
4500 lm	3000 K	34.4	131	16	T3 narrow	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T2 narrow	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T2 medium	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T3 medium	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T4 medium	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	Right corner	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T2 wide	Prismatic	1	0	1
4500 lm	3000 K	34.4	131	16	T5 Round	Prismatic	2	0	1
4500 lm	3000 K	34.4	131	16	Left corner	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T4 wide	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T5 square medium	Prismatic	2	0	1
4500 lm	4000 K	32.6	138	16	T1 short	Prismatic	2	0	1
4500 lm	4000 K	32.6	138	16	T3 narrow	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T2 narrow	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T2 medium	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T3 medium	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T4 medium	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	Right corner	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T2 wide	Prismatic	1	0	1
4500 lm	4000 K	32.6	138	16	T5 Round	Prismatic	2	0	1
4500 lm	4000 K	32.6	138	16	Left corner	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T4 wide	Prismatic	1	0	2
6000 lm	2700 K	47.9	125	24	T5 square medium	Prismatic	2	0	1

## Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
6000 lm	2700 K	47.9	125	24	T1 short	Prismatic	2	0	2
6000 lm	2700 K	47.9	125	24	T3 narrow	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T2 narrow	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T2 medium	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T3 medium	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	T4 medium	Prismatic	1	0	1
6000 lm	2700 K	47.9	125	24	Right corner	Prismatic	2	0	1
6000 lm	2700 K	47.9	125	24	T2 wide	Prismatic	1	0	2
6000 lm	2700 K	47.9	125	24	T5 Round	Prismatic	2	0	1
6000 lm	2700 K	47.9	125	24	Left corner	Prismatic	2	0	1
6000 lm	3000 K	45.5	132	24	T4 wide	Prismatic	1	0	2
6000 lm	3000 K	45.5	132	24	T5 square medium	Prismatic	2	0	1
6000 lm	3000 K	45.5	132	24	T1 short	Prismatic	2	0	2
6000 lm	3000 K	45.5	132	24	T3 narrow	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T2 narrow	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T2 medium	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T3 medium	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	T4 medium	Prismatic	1	0	1
6000 lm	3000 K	45.5	132	24	Right corner	Prismatic	2	0	1
6000 lm	3000 K	45.5	132	24	T2 wide	Prismatic	1	0	2
6000 lm	3000 K	45.5	132	24	T5 Round	Prismatic	2	0	1
6000 lm	3000 K	45.5	132	24	Left corner	Prismatic	2	0	1
6000 lm	4000 K	43	140	24	T4 wide	Prismatic	1	0	2
6000 lm	4000 K	43	140	24	T5 square medium	Prismatic	2	0	1
6000 lm	4000 K	43	140	24	T1 short	Prismatic	2	0	2
6000 lm	4000 K	43	140	24	T3 narrow	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T2 narrow	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T2 medium	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T3 medium	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	T4 medium	Prismatic	1	0	1
6000 lm	4000 K	43	140	24	Right corner	Prismatic	2	0	1
6000 lm	4000 K	43	140	24	T2 wide	Prismatic	1	0	2
6000 lm	4000 K	43	140	24	T5 Round	Prismatic	2	0	1
6000 lm	4000 K	43	140	24	Left corner	Prismatic	2	0	1
7500 lm	2700 K	61.1	123	24	T4 wide	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T5 square medium	Prismatic	3	0	1
7500 lm	2700 K	61.1	123	24	T1 short	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T3 narrow	Prismatic	2	0	1
7500 lm	2700 K	61.1	123	24	T2 narrow	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T2 medium	Prismatic	2	0	1
7500 lm	2700 K	61.1	123	24	T3 medium	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T4 medium	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	Right corner	Prismatic	2	0	1
7500 lm	2700 K	61.1	123	24	T2 wide	Prismatic	2	0	2
7500 lm	2700 K	61.1	123	24	T5 Round	Prismatic	2	0	1
7500 lm	2700 K	61.1	123	24	Left corner	Prismatic	2	0	1
7500 lm	3000 K	57.8	130	24	T4 wide	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T5 square medium	Prismatic	3	0	1
7500 lm	3000 K	57.8	130	24	T1 short	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T3 narrow	Prismatic	2	0	1
7500 lm	3000 K	57.8	130	24	T2 narrow	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T2 medium	Prismatic	2	0	1
7500 lm	3000 K	57.8	130	24	T3 medium	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T4 medium	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	Right corner	Prismatic	2	0	1

## Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7500 lm	3000 K	57.8	130	24	T2 wide	Prismatic	2	0	2
7500 lm	3000 K	57.8	130	24	T5 Round	Prismatic	2	0	1
7500 lm	3000 K	57.8	130	24	Left corner	Prismatic	2	0	1
7500 lm	4000 K	54.7	137	24	T4 wide	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T5 square medium	Prismatic	3	0	1
7500 lm	4000 K	54.7	137	24	T1 short	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T3 narrow	Prismatic	2	0	1
7500 lm	4000 K	54.7	137	24	T2 narrow	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T2 medium	Prismatic	2	0	1
7500 lm	4000 K	54.7	137	24	T3 medium	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T4 medium	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	Right corner	Prismatic	2	0	1
7500 lm	4000 K	54.7	137	24	T2 wide	Prismatic	2	0	2
7500 lm	4000 K	54.7	137	24	T5 Round	Prismatic	2	0	1
7500 lm	4000 K	54.7	137	24	Left corner	Prismatic	2	0	1
9000 lm	2700 K	71.1	127	32	T4 wide	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T5 square medium	Prismatic	3	0	1
9000 lm	2700 K	71.1	127	32	T1 short	Prismatic	3	0	2
9000 lm	2700 K	71.1	127	32	T3 narrow	Prismatic	2	0	1
9000 lm	2700 K	71.1	127	32	T2 narrow	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T2 medium	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T3 medium	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T4 medium	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	Right corner	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T2 wide	Prismatic	2	0	2
9000 lm	2700 K	71.1	127	32	T5 Round	Prismatic	3	0	1
9000 lm	2700 K	71.1	127	32	Left corner	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T4 wide	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T5 square medium	Prismatic	3	0	1
9000 lm	3000 K	67.4	134	32	T1 short	Prismatic	3	0	2
9000 lm	3000 K	67.4	134	32	T3 narrow	Prismatic	2	0	1
9000 lm	3000 K	67.4	134	32	T2 narrow	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T2 medium	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T3 medium	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T4 medium	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	Right corner	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T2 wide	Prismatic	2	0	2
9000 lm	3000 K	67.4	134	32	T5 Round	Prismatic	3	0	1
9000 lm	3000 K	67.4	134	32	Left corner	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T4 wide	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T5 square medium	Prismatic	3	0	1
9000 lm	4000 K	63.9	141	32	T1 short	Prismatic	3	0	2
9000 lm	4000 K	63.9	141	32	T3 narrow	Prismatic	2	0	1
9000 lm	4000 K	63.9	141	32	T2 narrow	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T2 medium	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T3 medium	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T4 medium	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	Right corner	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T2 wide	Prismatic	2	0	2
9000 lm	4000 K	63.9	141	32	T5 Round	Prismatic	3	0	1
9000 lm	4000 K	63.9	141	32	Left corner	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T4 wide	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T5 square medium	Prismatic	3	0	1
10500 lm	2700 K	84.2	125	32	T1 short	Prismatic	3	0	3
10500 lm	2700 K	84.2	125	32	T3 narrow	Prismatic	2	0	2

## Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
10500 lm	2700 K	84.2	125	32	T2 narrow	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T2 medium	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T3 medium	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T4 medium	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	Right corner	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T2 wide	Prismatic	2	0	2
10500 lm	2700 K	84.2	125	32	T5 Round	Prismatic	3	0	1
10500 lm	2700 K	84.2	125	32	Left corner	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T4 wide	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T5 square medium	Prismatic	3	0	1
10500 lm	3000 K	79.7	132	32	T1 short	Prismatic	3	0	3
10500 lm	3000 K	79.7	132	32	T3 narrow	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T2 narrow	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T2 medium	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T3 medium	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T4 medium	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	Right corner	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T2 wide	Prismatic	2	0	2
10500 lm	3000 K	79.7	132	32	T5 Round	Prismatic	3	0	1
10500 lm	3000 K	79.7	132	32	Left corner	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T4 wide	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T5 square medium	Prismatic	3	0	1
10500 lm	4000 K	75.4	139	32	T1 short	Prismatic	3	0	3
10500 lm	4000 K	75.4	139	32	T3 narrow	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T2 narrow	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T2 medium	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T3 medium	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T4 medium	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	Right corner	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T2 wide	Prismatic	2	0	2
10500 lm	4000 K	75.4	139	32	T5 Round	Prismatic	3	0	1
10500 lm	4000 K	75.4	139	32	Left corner	Prismatic	2	0	2
12000 lm	3000 K	86.7	138	48	Right corner	Prismatic	3	0	2
12000 lm	3000 K	86.7	138	48	T2 wide	Prismatic	2	0	2
12000 lm	3000 K	86.7	138	48	T5 Round	Prismatic	3	0	1
12000 lm	3000 K	86.7	138	48	Left corner	Prismatic	3	0	2
12000 lm	4000 K	82.1	146	48	T4 wide	Prismatic	2	0	3
12000 lm	4000 K	82.1	146	48	T5 square medium	Prismatic	3	0	2
12000 lm	4000 K	82.1	146	48	T1 short	Prismatic	3	0	3
12000 lm	4000 K	82.1	146	48	T3 narrow	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T2 narrow	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T2 medium	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T3 medium	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T4 medium	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	Right corner	Prismatic	3	0	2
12000 lm	4000 K	82.1	146	48	T2 wide	Prismatic	2	0	2
12000 lm	4000 K	82.1	146	48	T5 Round	Prismatic	3	0	1
12000 lm	4000 K	82.1	146	48	Left corner	Prismatic	3	0	2