


Nova M | Luminaire | Nova M

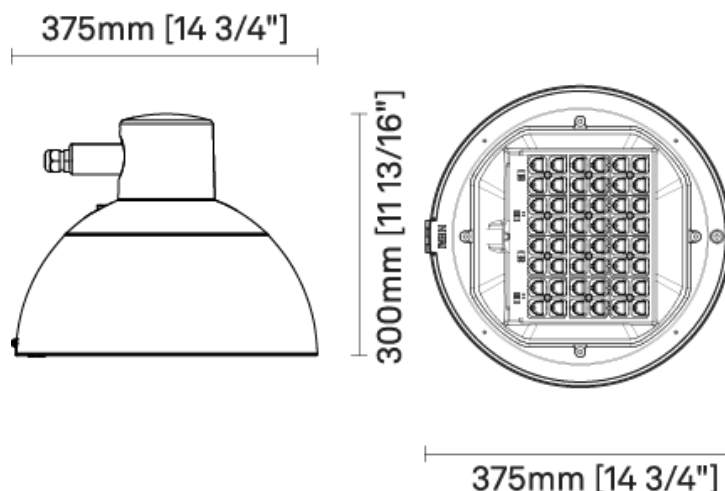

Ordering Information / Guide

Example: **LUNOVM0-N-D30-730-L025-ST-V1-F02-M2-CN1**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D28 Type I - Center road	722 Ra70 2200 K	L015 1500 lm	ST Transparent	V1 220V-240V	F02 1-10V+CLO	M2 Class II	CN1 Grey [Neri] Textured + White [RAL 9010] Textured
D36 Type II - Asymmetric	727 Ra70 2700 K	L025 2500 lm	SP Prismatic		F06 DALI+CLO		
D22 Type III - B	730 Ra70 3000 K	L035 3500 lm			F14 NVL6H+CLO		
D25 Type III - C	740 Ra70 4000 K	L045 4500 lm					
D37 Type III - Asymmetric		L060 6000 lm					
D24 Type IV - Forward throw		L075 7500 lm					
D38 Type IV - C		L090 9000 lm					
D30 Type V - Rotosymmetric		L105 10500 lm					
	L120 12000 lm						

Generated code: **LUNOVMO - N -** - - - - -

Nova M | Luminaire | Nova M

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤ 5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

ELECTRICAL CHARACTERISTICS

ENEC safety mark.

MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminium (UNI EN 1706) with a cylindrical upper frame for housing the internal component and a lower frame openable via hinge for access to the auxiliary and optical compartment.

Protective screen in extra-clear or prismatic tempered glass with IK10/IK07 impact resistance (EN 62262) and white internal reflector.

Stainless steel fastening elements, osmotic valve for pressure balancing, and compartment prepared for remote control systems.

INSTALLATION

Suitable for side mounting only on Nova system tips.

WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Nova M | Luminaire | Nova M


Type I - Center road

Transparent




Type I - Center road

Prismatic




Type II - Asymmetric

Transparent




Type II - Asymmetric

Prismatic




Type III - B

Transparent




Type III - B

Prismatic




Type III - C

Transparent




Type III - C

Prismatic




Type III - Asymmetric

Transparent




Type III - Asymmetric

Prismatic




Type IV - Forward throw

Transparent




Type IV - Forward throw

Prismatic




Type IV - C

Transparent




Type IV - C

Prismatic




Type V - Rotosymmetric

Transparent



Type V - Rotosymmetric

Prismatic



Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
2500 lm	2700 K	17.9	140	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	2700 K	17.9	140	16	Type I - Center road	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type III - B	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type III - C	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	17.9	140	16	Type IV - C	Transparent	1	0	1
2500 lm	2700 K	18	139	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type I - Center road	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type III - B	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type III - C	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	2700 K	18	139	16	Type IV - C	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	3000 K	17.2	145	16	Type I - Center road	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - B	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - C	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type IV - C	Transparent	1	0	1
2500 lm	3000 K	17.3	145	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type I - Center road	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type III - B	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type III - C	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.3	145	16	Type IV - C	Prismatic	1	0	1
2500 lm	4000 K	16.6	151	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	4000 K	16.6	151	16	Type I - Center road	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type III - B	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type III - C	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	16.6	151	16	Type IV - C	Transparent	1	0	1
2500 lm	4000 K	16.7	150	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type I - Center road	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type III - B	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type III - C	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.7	150	16	Type IV - C	Prismatic	1	0	1
2500 lm	2200 K	19.7	127	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	2200 K	19.7	127	16	Type I - Center road	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type III - B	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type III - C	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2200 K	19.7	127	16	Type III - Asymmetric	Transparent	1	0	1

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
2500 lm	2200 K	19.7	127	16	Type IV - C	Transparent	1	0	1
2500 lm	2200 K	19.9	126	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type I - Center road	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - B	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - C	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type IV - C	Prismatic	1	0	1
3500 lm	2700 K	24.3	144	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	2700 K	24.3	144	16	Type I - Center road	Transparent	2	0	1
3500 lm	2700 K	24.3	144	16	Type III - B	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type III - C	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	24.3	144	16	Type IV - C	Transparent	1	0	1
3500 lm	2700 K	24.5	143	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type I - Center road	Prismatic	2	0	1
3500 lm	2700 K	24.5	143	16	Type III - B	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type III - C	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	2700 K	24.5	143	16	Type IV - C	Prismatic	1	0	1
3500 lm	3000 K	23.5	149	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	3000 K	23.5	149	16	Type I - Center road	Transparent	2	0	1
3500 lm	3000 K	23.5	149	16	Type III - B	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type III - C	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	23.5	149	16	Type IV - C	Transparent	1	0	1
3500 lm	3000 K	23.1	152	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	3000 K	23.6	148	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type I - Center road	Prismatic	2	0	1
3500 lm	3000 K	23.6	148	16	Type III - B	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type III - C	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	3000 K	23.6	148	16	Type IV - C	Prismatic	1	0	1
3500 lm	4000 K	22.5	156	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	4000 K	22.5	156	16	Type I - Center road	Transparent	2	0	1
3500 lm	4000 K	22.5	156	16	Type III - B	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type III - C	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	4000 K	22.5	156	16	Type IV - C	Transparent	1	0	1
3500 lm	4000 K	22.2	158	16	Type I - Center road	Transparent	2	0	1
3500 lm	4000 K	22.7	154	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type I - Center road	Prismatic	2	0	1
3500 lm	4000 K	22.7	154	16	Type III - B	Prismatic	1	0	1

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
3500 lm	4000 K	22.7	154	16	Type III - C	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	4000 K	22.7	154	16	Type IV - C	Prismatic	1	0	1
3500 lm	2200 K	26.9	130	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	2200 K	26.9	130	16	Type I - Center road	Transparent	2	0	1
3500 lm	2200 K	26.9	130	16	Type III - B	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type III - C	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2200 K	26.9	130	16	Type IV - C	Transparent	1	0	1
3500 lm	2200 K	27.1	129	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type V - Rotosymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type I - Center road	Prismatic	2	0	1
3500 lm	2200 K	27.1	129	16	Type III - B	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type III - C	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.1	129	16	Type IV - C	Prismatic	1	0	1
4500 lm	2700 K	31	145	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2700 K	31	145	16	Type I - Center road	Transparent	2	0	1
4500 lm	2700 K	31	145	16	Type III - B	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type III - C	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	31	145	16	Type IV - C	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	2700 K	31.3	144	16	Type I - Center road	Prismatic	2	0	1
4500 lm	2700 K	31.3	144	16	Type III - B	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type III - C	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	2700 K	31.3	144	16	Type IV - C	Prismatic	1	0	1
4500 lm	3000 K	29.8	151	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	3000 K	29.8	151	16	Type I - Center road	Transparent	2	0	1
4500 lm	3000 K	29.8	151	16	Type III - B	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type III - C	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	29.8	151	16	Type IV - C	Transparent	1	0	1
4500 lm	3000 K	30	150	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	3000 K	30	150	16	Type I - Center road	Prismatic	2	0	1
4500 lm	3000 K	30	150	16	Type III - B	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type III - C	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type IV - C	Prismatic	1	0	1
4500 lm	4000 K	28.6	157	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	4000 K	28.6	157	16	Type I - Center road	Transparent	2	0	1

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
4500 lm	4000 K	28.6	157	16	Type III - B	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type III - C	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	28.6	157	16	Type IV - C	Transparent	1	0	1
4500 lm	4000 K	28.9	156	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	4000 K	28.9	156	16	Type I - Center road	Prismatic	2	0	1
4500 lm	4000 K	28.9	156	16	Type III - B	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type III - C	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type IV - C	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	2200 K	33.3	135	24	Type I - Center road	Prismatic	2	0	1
4500 lm	2200 K	33.3	135	24	Type III - B	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type III - C	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type IV - C	Prismatic	1	0	1
4500 lm	2200 K	33.1	136	24	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2200 K	33.1	136	24	Type I - Center road	Transparent	2	0	1
4500 lm	2200 K	33.1	136	24	Type III - B	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type III - C	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2200 K	33.1	136	24	Type IV - C	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	2700 K	40	150	24	Type I - Center road	Transparent	2	0	2
6000 lm	2700 K	40	150	24	Type III - B	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type III - C	Transparent	2	0	2
6000 lm	2700 K	40	150	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	40	150	24	Type IV - C	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	2700 K	40.2	149	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	2700 K	40.2	149	24	Type I - Center road	Prismatic	2	0	2
6000 lm	2700 K	40.2	149	24	Type III - B	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type III - C	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	2700 K	40.2	149	24	Type IV - C	Prismatic	1	0	1
6000 lm	3000 K	39.8	151	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	3000 K	39.8	151	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	3000 K	39.8	151	24	Type I - Center road	Transparent	2	0	2
6000 lm	3000 K	39.8	151	24	Type III - B	Transparent	1	0	1
6000 lm	3000 K	39.8	151	24	Type III - C	Transparent	2	0	2
6000 lm	3000 K	39.8	151	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	39.8	151	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	39.8	151	24	Type IV - C	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type V - Rotosymmetric	Transparent	2	0	1

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
6000 lm	3000 K	38.3	157	24	Type I - Center road	Transparent	2	0	2
6000 lm	3000 K	38.3	157	24	Type III - B	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type III - C	Transparent	2	0	2
6000 lm	3000 K	38.3	157	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	38.3	157	24	Type IV - C	Transparent	1	0	1
6000 lm	3000 K	40	150	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	3000 K	40	150	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	3000 K	40	150	24	Type I - Center road	Prismatic	2	0	2
6000 lm	3000 K	40	150	24	Type III - B	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type III - C	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	40	150	24	Type IV - C	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	3000 K	38.5	156	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	3000 K	38.5	156	24	Type I - Center road	Prismatic	2	0	2
6000 lm	3000 K	38.5	156	24	Type III - B	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type III - C	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type IV - C	Prismatic	1	0	1
6000 lm	4000 K	36.5	164	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	4000 K	36.5	164	24	Type I - Center road	Transparent	2	0	2
6000 lm	4000 K	36.5	164	24	Type III - B	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type III - C	Transparent	2	0	2
6000 lm	4000 K	36.5	164	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	36.5	164	24	Type IV - C	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	4000 K	36.8	163	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	4000 K	36.8	163	24	Type I - Center road	Prismatic	2	0	2
6000 lm	4000 K	36.8	163	24	Type III - B	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type III - C	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	4000 K	36.8	163	24	Type IV - C	Prismatic	1	0	1
6000 lm	2200 K	46.3	130	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2200 K	46.3	130	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	2200 K	46.3	130	24	Type I - Center road	Transparent	2	0	2
6000 lm	2200 K	46.3	130	24	Type III - B	Transparent	1	0	1
6000 lm	2200 K	46.3	130	24	Type III - C	Transparent	2	0	2
6000 lm	2200 K	46.3	130	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2200 K	46.3	130	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	2200 K	46.3	130	24	Type IV - C	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type IV - Forward throw	Prismatic	1	0	2
6000 lm	2200 K	46.6	129	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	2200 K	46.6	129	24	Type I - Center road	Prismatic	2	0	2
6000 lm	2200 K	46.6	129	24	Type III - B	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type III - C	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	2200 K	46.6	129	24	Type IV - C	Prismatic	1	0	1
7500 lm	2700 K	52.1	144	24	Type IV - Forward throw	Transparent	2	0	2

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7500 lm	2700 K	52.1	144	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	2700 K	52.1	144	24	Type I - Center road	Transparent	2	0	2
7500 lm	2700 K	52.1	144	24	Type III - B	Transparent	2	0	1
7500 lm	2700 K	52.1	144	24	Type III - C	Transparent	2	0	2
7500 lm	2700 K	52.1	144	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	2700 K	52.1	144	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	2700 K	52.1	144	24	Type IV - C	Transparent	1	0	1
7500 lm	2700 K	52.4	143	24	Type IV - Forward throw	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	2700 K	52.4	143	24	Type I - Center road	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type III - B	Prismatic	2	0	1
7500 lm	2700 K	52.4	143	24	Type III - C	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	2700 K	52.4	143	24	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	2700 K	52.4	143	24	Type IV - C	Prismatic	2	0	2
7500 lm	3000 K	50	150	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	3000 K	50	150	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	3000 K	50	150	24	Type I - Center road	Transparent	2	0	2
7500 lm	3000 K	50	150	24	Type III - B	Transparent	2	0	1
7500 lm	3000 K	50	150	24	Type III - C	Transparent	2	0	2
7500 lm	3000 K	50	150	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	3000 K	50	150	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	3000 K	50	150	24	Type IV - C	Transparent	1	0	1
7500 lm	3000 K	50.4	149	24	Type IV - Forward throw	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	3000 K	50.4	149	24	Type I - Center road	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type III - B	Prismatic	2	0	1
7500 lm	3000 K	50.4	149	24	Type III - C	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	3000 K	50.4	149	24	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	3000 K	50.4	149	24	Type IV - C	Prismatic	2	0	2
7500 lm	4000 K	47.8	157	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	4000 K	47.8	157	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	4000 K	47.8	157	24	Type I - Center road	Transparent	2	0	2
7500 lm	4000 K	47.8	157	24	Type III - B	Transparent	2	0	1
7500 lm	4000 K	47.8	157	24	Type III - C	Transparent	2	0	2
7500 lm	4000 K	47.8	157	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	4000 K	47.8	157	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	4000 K	47.8	157	24	Type IV - C	Transparent	1	0	1
7500 lm	4000 K	48.1	156	24	Type IV - Forward throw	Prismatic	2	0	2
7500 lm	4000 K	48.1	156	24	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	4000 K	48.1	156	24	Type I - Center road	Prismatic	2	0	2
7500 lm	4000 K	48.1	156	24	Type III - B	Prismatic	2	0	1
7500 lm	4000 K	48.1	156	24	Type III - C	Prismatic	2	0	2
7500 lm	4000 K	48.1	156	24	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	4000 K	48.1	156	24	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	4000 K	48.1	156	24	Type IV - C	Prismatic	2	0	2
7500 lm	2200 K	56.2	133	32	Type IV - Forward throw	Transparent	2	0	2
7500 lm	2200 K	56.2	133	32	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	2200 K	56.2	133	32	Type I - Center road	Transparent	2	0	2
7500 lm	2200 K	56.2	133	32	Type III - B	Transparent	2	0	1
7500 lm	2200 K	56.2	133	32	Type III - C	Transparent	2	0	2
7500 lm	2200 K	56.2	133	32	Type II - Asymmetric	Transparent	2	0	1
7500 lm	2200 K	56.2	133	32	Type III - Asymmetric	Transparent	1	0	2
7500 lm	2200 K	56.2	133	32	Type IV - C	Transparent	1	0	1

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7500 lm	2200 K	56.5	133	32	Type IV - Forward throw	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type V - Rotosymmetric	Prismatic	3	0	1
7500 lm	2200 K	56.5	133	32	Type I - Center road	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type III - B	Prismatic	2	0	1
7500 lm	2200 K	56.5	133	32	Type III - C	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type II - Asymmetric	Prismatic	2	0	1
7500 lm	2200 K	56.5	133	32	Type III - Asymmetric	Prismatic	2	0	2
7500 lm	2200 K	56.5	133	32	Type IV - C	Prismatic	2	0	2
9000 lm	2700 K	60.7	148	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	2700 K	60.7	148	32	Type I - Center road	Transparent	3	0	2
9000 lm	2700 K	60.7	148	32	Type III - B	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type III - C	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	2700 K	60.7	148	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	2700 K	60.7	148	32	Type IV - C	Transparent	2	0	2
9000 lm	2700 K	61.1	147	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	2700 K	61.1	147	32	Type I - Center road	Prismatic	3	0	2
9000 lm	2700 K	61.1	147	32	Type III - B	Prismatic	2	0	1
9000 lm	2700 K	61.1	147	32	Type III - C	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type II - Asymmetric	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	2700 K	61.1	147	32	Type IV - C	Prismatic	2	0	2
9000 lm	3000 K	58.2	155	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	3000 K	58.2	155	32	Type I - Center road	Transparent	3	0	2
9000 lm	3000 K	58.2	155	32	Type III - B	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type III - C	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	3000 K	58.2	155	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	3000 K	58.2	155	32	Type IV - C	Transparent	2	0	2
9000 lm	3000 K	58.6	154	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	3000 K	58.6	154	32	Type I - Center road	Prismatic	3	0	2
9000 lm	3000 K	58.6	154	32	Type III - B	Prismatic	2	0	1
9000 lm	3000 K	58.6	154	32	Type III - C	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type II - Asymmetric	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	3000 K	58.6	154	32	Type IV - C	Prismatic	2	0	2
9000 lm	4000 K	55.7	162	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	4000 K	55.7	162	32	Type I - Center road	Transparent	3	0	2
9000 lm	4000 K	55.7	162	32	Type III - B	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type III - C	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	4000 K	55.7	162	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	4000 K	55.7	162	32	Type IV - C	Transparent	2	0	2
9000 lm	4000 K	54.6	165	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	4000 K	56	161	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	4000 K	56	161	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	4000 K	56	161	32	Type I - Center road	Prismatic	3	0	2
9000 lm	4000 K	56	161	32	Type III - B	Prismatic	2	0	1
9000 lm	4000 K	56	161	32	Type III - C	Prismatic	2	0	2
9000 lm	4000 K	56	161	32	Type II - Asymmetric	Prismatic	2	0	2

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
9000 lm	4000 K	56	161	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	4000 K	56	161	32	Type IV - C	Prismatic	2	0	2
9000 lm	2200 K	68.4	132	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	2200 K	68.4	132	32	Type I - Center road	Transparent	3	0	2
9000 lm	2200 K	68.4	132	32	Type III - B	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type III - C	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	2200 K	68.4	132	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	2200 K	68.4	132	32	Type IV - C	Transparent	2	0	2
9000 lm	2200 K	68.9	131	32	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	2200 K	68.9	131	32	Type I - Center road	Prismatic	3	0	2
9000 lm	2200 K	68.9	131	32	Type III - B	Prismatic	2	0	1
9000 lm	2200 K	68.9	131	32	Type III - C	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type II - Asymmetric	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	2200 K	68.9	131	32	Type IV - C	Prismatic	2	0	2
10500 lm	2700 K	71.9	146	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	2700 K	71.9	146	32	Type I - Center road	Transparent	3	0	3
10500 lm	2700 K	71.9	146	32	Type III - B	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type III - C	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	2700 K	71.9	146	32	Type IV - C	Transparent	2	0	2
10500 lm	2700 K	72.5	145	32	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	2700 K	72.5	145	32	Type I - Center road	Prismatic	3	0	3
10500 lm	2700 K	72.5	145	32	Type III - B	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type III - C	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	2700 K	72.5	145	32	Type IV - C	Prismatic	2	0	2
10500 lm	3000 K	68.9	152	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	3000 K	68.9	152	32	Type I - Center road	Transparent	3	0	3
10500 lm	3000 K	68.9	152	32	Type III - B	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type III - C	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	3000 K	68.9	152	32	Type IV - C	Transparent	2	0	2
10500 lm	3000 K	69.3	152	32	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	3000 K	69.3	152	32	Type I - Center road	Prismatic	3	0	3
10500 lm	3000 K	69.3	152	32	Type III - B	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type III - C	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	3000 K	69.3	152	32	Type IV - C	Prismatic	2	0	2
10500 lm	4000 K	65.7	160	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	4000 K	65.7	160	32	Type I - Center road	Transparent	3	0	3
10500 lm	4000 K	65.7	160	32	Type III - B	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type III - C	Transparent	2	0	2

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
10500 lm	4000 K	65.7	160	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	4000 K	65.7	160	32	Type IV - C	Transparent	2	0	2
10500 lm	4000 K	66.1	159	32	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	4000 K	66.1	159	32	Type I - Center road	Prismatic	3	0	3
10500 lm	4000 K	66.1	159	32	Type III - B	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type III - C	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	4000 K	66.1	159	32	Type IV - C	Prismatic	2	0	2
10500 lm	2200 K	77.3	136	48	Type IV - Forward throw	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	2200 K	77.3	136	48	Type I - Center road	Transparent	3	0	3
10500 lm	2200 K	77.3	136	48	Type III - B	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type III - C	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type II - Asymmetric	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type III - Asymmetric	Transparent	2	0	2
10500 lm	2200 K	77.3	136	48	Type IV - C	Transparent	2	0	2
10500 lm	2200 K	77.9	135	48	Type IV - Forward throw	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type V - Rotosymmetric	Prismatic	3	0	1
10500 lm	2200 K	77.9	135	48	Type I - Center road	Prismatic	3	0	3
10500 lm	2200 K	77.9	135	48	Type III - B	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type III - C	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type II - Asymmetric	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type III - Asymmetric	Prismatic	2	0	2
10500 lm	2200 K	77.9	135	48	Type IV - C	Prismatic	2	0	2
12000 lm	2700 K	79.3	151	48	Type IV - Forward throw	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	2700 K	79.3	151	48	Type I - Center road	Transparent	3	0	3
12000 lm	2700 K	79.3	151	48	Type III - B	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type III - C	Transparent	3	0	3
12000 lm	2700 K	79.3	151	48	Type II - Asymmetric	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type III - Asymmetric	Transparent	2	0	2
12000 lm	2700 K	79.3	151	48	Type IV - C	Transparent	2	0	2
12000 lm	2700 K	79.9	150	48	Type IV - Forward throw	Prismatic	2	0	3
12000 lm	2700 K	79.9	150	48	Type V - Rotosymmetric	Prismatic	3	0	2
12000 lm	2700 K	79.9	150	48	Type I - Center road	Prismatic	3	0	3
12000 lm	2700 K	79.9	150	48	Type III - B	Prismatic	2	0	2
12000 lm	2700 K	79.9	150	48	Type III - C	Prismatic	2	0	2
12000 lm	2700 K	79.9	150	48	Type II - Asymmetric	Prismatic	2	0	2
12000 lm	2700 K	79.9	150	48	Type III - Asymmetric	Prismatic	2	0	2
12000 lm	2700 K	79.9	150	48	Type IV - C	Prismatic	2	0	2
12000 lm	3000 K	76.2	157	48	Type IV - Forward throw	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	3000 K	76.2	157	48	Type I - Center road	Transparent	3	0	3
12000 lm	3000 K	76.2	157	48	Type III - B	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type III - C	Transparent	3	0	3
12000 lm	3000 K	76.2	157	48	Type II - Asymmetric	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type III - Asymmetric	Transparent	2	0	2
12000 lm	3000 K	76.2	157	48	Type IV - C	Transparent	2	0	2
12000 lm	3000 K	76.8	156	48	Type IV - Forward throw	Prismatic	2	0	3
12000 lm	3000 K	76.8	156	48	Type V - Rotosymmetric	Prismatic	3	0	2
12000 lm	3000 K	76.8	156	48	Type I - Center road	Prismatic	3	0	3
12000 lm	3000 K	76.8	156	48	Type III - B	Prismatic	2	0	2

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
12000 lm	3000 K	76.8	156	48	Type III - C	Prismatic	2	0	2
12000 lm	3000 K	76.8	156	48	Type II - Asymmetric	Prismatic	2	0	2
12000 lm	3000 K	76.8	156	48	Type III - Asymmetric	Prismatic	2	0	2
12000 lm	3000 K	76.8	156	48	Type IV - C	Prismatic	2	0	2
12000 lm	4000 K	72.9	165	48	Type IV - Forward throw	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	4000 K	72.9	165	48	Type I - Center road	Transparent	3	0	3
12000 lm	4000 K	72.9	165	48	Type III - B	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type III - C	Transparent	3	0	3
12000 lm	4000 K	72.9	165	48	Type II - Asymmetric	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type III - Asymmetric	Transparent	2	0	2
12000 lm	4000 K	72.9	165	48	Type IV - C	Transparent	2	0	2
12000 lm	4000 K	73.4	163	48	Type IV - Forward throw	Prismatic	2	0	3
12000 lm	4000 K	73.4	163	48	Type V - Rotosymmetric	Prismatic	3	0	2
12000 lm	4000 K	73.4	163	48	Type I - Center road	Prismatic	3	0	3
12000 lm	4000 K	73.4	163	48	Type III - B	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type III - C	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type II - Asymmetric	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type III - Asymmetric	Prismatic	2	0	2
12000 lm	4000 K	73.4	163	48	Type IV - C	Prismatic	2	0	2
1500 lm	2700 K	11.2	134	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	2700 K	11.2	134	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	2700 K	11.2	134	16	Type I - Center road	Transparent	1	0	1
1500 lm	2700 K	11.2	134	16	Type III - B	Transparent	0	0	0
1500 lm	2700 K	11.2	134	16	Type III - C	Transparent	1	0	1
1500 lm	2700 K	11.2	134	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	2700 K	11.2	134	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	2700 K	11.2	134	16	Type IV - C	Transparent	0	0	0
1500 lm	2700 K	11.3	133	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type I - Center road	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type III - B	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type III - C	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	2700 K	11.3	133	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	2700 K	11.3	133	16	Type IV - C	Prismatic	0	0	1
1500 lm	3000 K	10.9	138	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	3000 K	10.9	138	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	3000 K	10.9	138	16	Type I - Center road	Transparent	1	0	1
1500 lm	3000 K	10.9	138	16	Type III - B	Transparent	0	0	0
1500 lm	3000 K	10.9	138	16	Type III - C	Transparent	1	0	1
1500 lm	3000 K	10.9	138	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	3000 K	10.9	138	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	3000 K	10.9	138	16	Type IV - C	Transparent	0	0	0
1500 lm	3000 K	11	136	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type I - Center road	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type III - B	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type III - C	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	3000 K	11	136	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	3000 K	11	136	16	Type IV - C	Prismatic	0	0	1
1500 lm	4000 K	10.5	143	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	4000 K	10.5	143	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type V - Rotosymmetric	Transparent	1	0	0

Nova M | Luminaire | Nova M

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
1500 lm	4000 K	10.5	143	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type I - Center road	Transparent	1	0	1
1500 lm	4000 K	10.5	143	16	Type I - Center road	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - B	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type III - B	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - C	Transparent	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - C	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	4000 K	10.5	143	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	4000 K	10.5	143	16	Type IV - C	Transparent	0	0	0
1500 lm	4000 K	10.5	143	16	Type IV - C	Prismatic	0	0	1
1500 lm	4000 K	10.2	147	16	Type I - Center road	Transparent	1	0	1
1500 lm	2200 K	12.4	121	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	2200 K	12.4	121	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	2200 K	12.4	121	16	Type I - Center road	Transparent	1	0	1
1500 lm	2200 K	12.4	121	16	Type III - B	Transparent	0	0	0
1500 lm	2200 K	12.4	121	16	Type III - C	Transparent	1	0	1
1500 lm	2200 K	12.4	121	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	2200 K	12.4	121	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	2200 K	12.4	121	16	Type IV - C	Transparent	0	0	0
1500 lm	2200 K	12.5	120	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type I - Center road	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type III - B	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type III - C	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	2200 K	12.5	120	16	Type III - Asymmetric	Prismatic	0	0	1
1500 lm	2200 K	12.5	120	16	Type IV - C	Prismatic	0	0	1