


## Polis Lateral | Luminaire | Polis Lateral

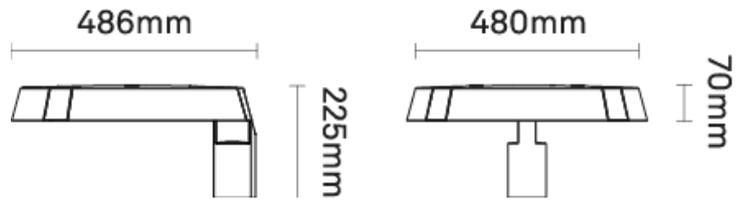

### Ordering Information / Guide

Example: **LUPOL01-N-D28-730-L045-ST-V1-F27-M2-CNO**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
<b>D28</b> Type I - Center road	<b>727</b> Ra70 2700 K	<b>L025</b> 2500 lm	<b>ST</b> Transparent	<b>V1</b> 220V-240V	<b>F27</b> ON/OFF+CLO	<b>M2</b> Class II	<b>CNO</b> Grey [Neri] Textured
<b>D36</b> Type II - Asymmetric	<b>730</b> Ra70 3000 K	<b>L035</b> 3500 lm			<b>F02</b> 1-10V+CLO		
<b>D22</b> Type III - B	<b>740</b> Ra70 4000 K	<b>L045</b> 4500 lm			<b>F06</b> DALI+CLO		
<b>D25</b> Type III - C		<b>L060</b> 6000 lm			<b>F10</b> D4i+ZHAGA		
<b>D37</b> Type III - Asymmetric		<b>L075</b> 7500 lm			<b>F04</b> Ampdim+CLO		
<b>D24</b> Type IV - Forward throw		<b>L090</b> 9000 lm			<b>F14</b> NVL6H+CLO		
<b>D38</b> Type IV - C		<b>L105</b> 10500 lm					
<b>D30</b> Type V - Rotosymmetric		<b>L120</b> 12000 lm					
		<b>L135</b> 13500 lm					

Generated code: **LUPOL01 - N** - - - - -

## Polis Lateral | Luminaire | Polis Lateral

### SOURCE

High-power LED matrix.

**Standard Deviation Colour Matching** ≤5

### LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

### ELECTRICAL CHARACTERISTICS

Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778.

ENEC safety mark.

ENEC+ safety and performance mark.

**Cable length** 1 m

### MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminium (UNI EN 1706) with a main body and integrated heat sink.

Protective screen in extra-clear screen-printed tempered glass with IK09 impact resistance (EN 62262) and white internal reflector in polycarbonate. EPDM gasket between glass and upper cover, with stainless steel screws. Body supported by steel sheet.

### INSTALLATION

Side and pole-top mounting on Ø 60 mm tubes, external diameter Ø 76 mm.

### WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

## Polis Lateral | Luminaire | Polis Lateral


Type I - Center road

Transparent

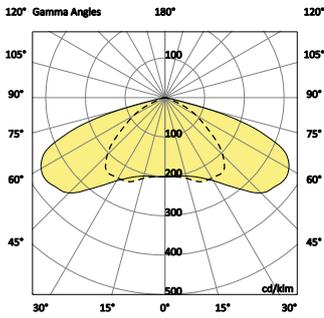


Type II - Asymmetric

Transparent

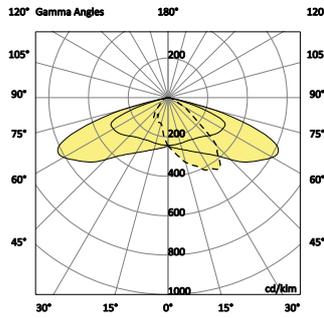


Type III - B

Transparent

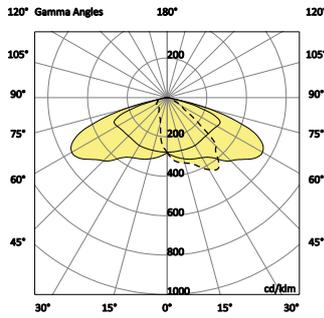


Type III - C

Transparent

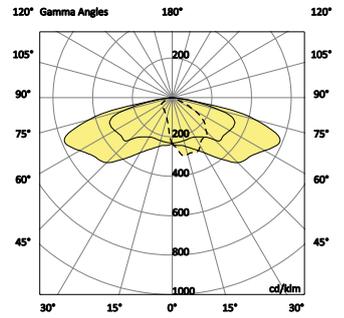


Type III - Asymmetric

Transparent

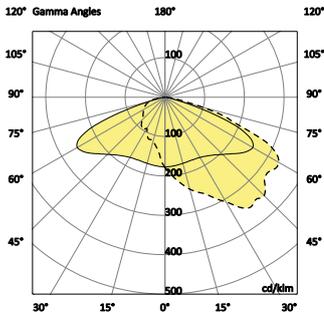


Type IV - Forward throw

Transparent

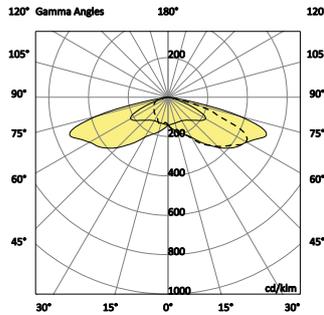


Type IV - C

Transparent

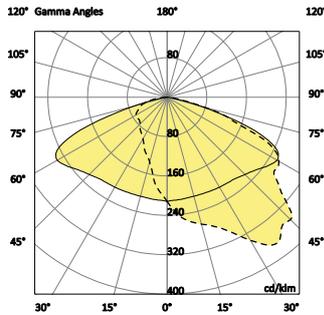

Type V - Rotosymmetric

Transparent

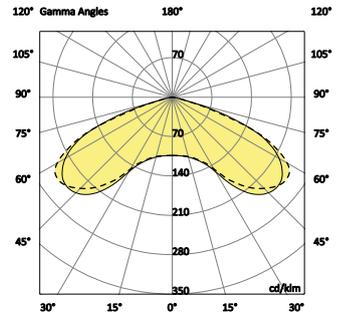

## Polis Lateral | Luminaire | Polis Lateral

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
4500 lm	2700 K	32.1	140	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2700 K	32.1	140	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2700 K	32.1	140	16	Type I - Center road	Transparent	2	0	1
4500 lm	2700 K	32.1	140	16	Type III - B	Transparent	1	0	1
4500 lm	2700 K	32.1	140	16	Type III - C	Transparent	1	0	1
4500 lm	2700 K	32.1	140	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	32.1	140	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	32.1	140	16	Type IV - C	Transparent	1	0	1
4500 lm	3000 K	30.9	146	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	3000 K	30.9	146	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	3000 K	30.9	146	16	Type I - Center road	Transparent	2	0	1
4500 lm	3000 K	30.9	146	16	Type III - B	Transparent	1	0	1
4500 lm	3000 K	30.9	146	16	Type III - C	Transparent	1	0	1
4500 lm	3000 K	30.9	146	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	30.9	146	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	30.9	146	16	Type IV - C	Transparent	1	0	1
4500 lm	3000 K	30.4	148	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	3000 K	30.4	148	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	29.6	152	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	4000 K	29.6	152	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	4000 K	29.6	152	16	Type I - Center road	Transparent	2	0	1
4500 lm	4000 K	29.6	152	16	Type III - B	Transparent	1	0	1
4500 lm	4000 K	29.6	152	16	Type III - C	Transparent	1	0	1
4500 lm	4000 K	29.6	152	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	29.6	152	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	29.6	152	16	Type IV - C	Transparent	1	0	1
2500 lm	2700 K	17.3	145	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2700 K	17.3	145	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	2700 K	17.3	145	16	Type I - Center road	Transparent	1	0	1
2500 lm	2700 K	17.3	145	16	Type III - B	Transparent	1	0	1
2500 lm	2700 K	17.3	145	16	Type III - C	Transparent	1	0	1
2500 lm	2700 K	17.3	145	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	17.3	145	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	17.3	145	16	Type IV - C	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	3000 K	16.6	151	16	Type I - Center road	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	Type III - B	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	Type III - C	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	Type IV - C	Transparent	1	0	1
2500 lm	3000 K	16.4	152	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	16	156	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	4000 K	16	156	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	4000 K	16	156	16	Type I - Center road	Transparent	1	0	1
2500 lm	4000 K	16	156	16	Type III - B	Transparent	1	0	1
2500 lm	4000 K	16	156	16	Type III - C	Transparent	1	0	1
2500 lm	4000 K	16	156	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	16	156	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	16	156	16	Type IV - C	Transparent	1	0	1
3500 lm	2700 K	25.1	139	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2700 K	25.1	139	16	Type V - Rotosymmetric	Transparent	2	0	0

## Polis Lateral | Luminaire | Polis Lateral

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
3500 lm	2700 K	25.1	139	16	Type I - Center road	Transparent	2	0	1
3500 lm	2700 K	25.1	139	16	Type III - B	Transparent	1	0	1
3500 lm	2700 K	25.1	139	16	Type III - C	Transparent	1	0	1
3500 lm	2700 K	25.1	139	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	25.1	139	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	25.1	139	16	Type IV - C	Transparent	1	0	1
3500 lm	2700 K	24.5	143	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	3000 K	24.2	145	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	3000 K	24.2	145	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	3000 K	24.2	145	16	Type I - Center road	Transparent	2	0	1
3500 lm	3000 K	24.2	145	16	Type III - B	Transparent	1	0	1
3500 lm	3000 K	24.2	145	16	Type III - C	Transparent	1	0	1
3500 lm	3000 K	24.2	145	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	24.2	145	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	24.2	145	16	Type IV - C	Transparent	1	0	1
3500 lm	3000 K	23.9	146	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	23.9	146	16	Type IV - C	Transparent	1	0	1
3500 lm	4000 K	23.3	150	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	4000 K	23.3	150	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	4000 K	23.3	150	16	Type I - Center road	Transparent	2	0	1
3500 lm	4000 K	23.3	150	16	Type III - B	Transparent	1	0	1
3500 lm	4000 K	23.3	150	16	Type III - C	Transparent	1	0	1
3500 lm	4000 K	23.3	150	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	4000 K	23.3	150	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	4000 K	23.3	150	16	Type IV - C	Transparent	1	0	1
6000 lm	2700 K	41.5	145	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2700 K	41.5	145	24	Type V - Rotosymmetric	Transparent	3	0	1
6000 lm	2700 K	41.5	145	24	Type I - Center road	Transparent	2	0	2
6000 lm	2700 K	41.5	145	24	Type III - B	Transparent	1	0	1
6000 lm	2700 K	41.5	145	24	Type III - C	Transparent	1	0	1
6000 lm	2700 K	41.5	145	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	41.5	145	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	41.5	145	24	Type IV - C	Transparent	1	0	1
6000 lm	3000 K	39.7	151	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	3000 K	39.7	151	24	Type V - Rotosymmetric	Transparent	3	0	1
6000 lm	3000 K	39.7	151	24	Type I - Center road	Transparent	2	0	2
6000 lm	3000 K	39.7	151	24	Type III - B	Transparent	1	0	1
6000 lm	3000 K	39.7	151	24	Type III - C	Transparent	1	0	1
6000 lm	3000 K	39.7	151	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	39.7	151	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	39.7	151	24	Type IV - C	Transparent	1	0	1
6000 lm	4000 K	38	158	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	4000 K	38	158	24	Type V - Rotosymmetric	Transparent	3	0	1
6000 lm	4000 K	38	158	24	Type I - Center road	Transparent	2	0	2
6000 lm	4000 K	38	158	24	Type III - B	Transparent	1	0	1
6000 lm	4000 K	38	158	24	Type III - C	Transparent	1	0	1
6000 lm	4000 K	38	158	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	38	158	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	38	158	24	Type IV - C	Transparent	1	0	1
7500 lm	2700 K	54.1	139	24	Type IV - Forward throw	Transparent	1	0	2
7500 lm	2700 K	54.1	139	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	2700 K	54.1	139	24	Type I - Center road	Transparent	2	0	2
7500 lm	2700 K	54.1	139	24	Type III - B	Transparent	2	0	1
7500 lm	2700 K	54.1	139	24	Type III - C	Transparent	2	0	2
7500 lm	2700 K	54.1	139	24	Type II - Asymmetric	Transparent	2	0	1

## Polis Lateral | Luminaire | Polis Lateral

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	2
7500 lm	2700 K	54.1	139	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	2700 K	54.1	139	24	Type IV - C	Transparent	1	0	1
7500 lm	3000 K	51.9	145	24	Type IV - Forward throw	Transparent	1	0	2
7500 lm	3000 K	51.9	145	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	3000 K	51.9	145	24	Type I - Center road	Transparent	2	0	2
7500 lm	3000 K	51.9	145	24	Type III - B	Transparent	2	0	1
7500 lm	3000 K	51.9	145	24	Type III - C	Transparent	2	0	2
7500 lm	3000 K	51.9	145	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	3000 K	51.9	145	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	3000 K	51.9	145	24	Type IV - C	Transparent	1	0	1
7500 lm	3000 K	51	147	24	Type IV - Forward throw	Transparent	1	0	2
7500 lm	4000 K	49.5	152	24	Type IV - Forward throw	Transparent	1	0	2
7500 lm	4000 K	49.5	152	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	4000 K	49.5	152	24	Type I - Center road	Transparent	2	0	2
7500 lm	4000 K	49.5	152	24	Type III - B	Transparent	2	0	1
7500 lm	4000 K	49.5	152	24	Type III - C	Transparent	2	0	2
7500 lm	4000 K	49.5	152	24	Type II - Asymmetric	Transparent	2	0	1
7500 lm	4000 K	49.5	152	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	4000 K	49.5	152	24	Type IV - C	Transparent	1	0	1
9000 lm	2700 K	63	143	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	2700 K	63	143	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	2700 K	63	143	32	Type I - Center road	Transparent	3	0	2
9000 lm	2700 K	63	143	32	Type III - B	Transparent	2	0	2
9000 lm	2700 K	63	143	32	Type III - C	Transparent	2	0	2
9000 lm	2700 K	63	143	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	2700 K	63	143	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	2700 K	63	143	32	Type IV - C	Transparent	2	0	2
9000 lm	3000 K	60.4	149	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	3000 K	60.4	149	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	3000 K	60.4	149	32	Type I - Center road	Transparent	3	0	2
9000 lm	3000 K	60.4	149	32	Type III - B	Transparent	2	0	2
9000 lm	3000 K	60.4	149	32	Type III - C	Transparent	2	0	2
9000 lm	3000 K	60.4	149	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	3000 K	60.4	149	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	3000 K	60.4	149	32	Type IV - C	Transparent	2	0	2
9000 lm	4000 K	57.8	156	32	Type IV - Forward throw	Transparent	2	0	2
9000 lm	4000 K	57.8	156	32	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	4000 K	57.8	156	32	Type I - Center road	Transparent	3	0	2
9000 lm	4000 K	57.8	156	32	Type III - B	Transparent	2	0	2
9000 lm	4000 K	57.8	156	32	Type III - C	Transparent	2	0	2
9000 lm	4000 K	57.8	156	32	Type II - Asymmetric	Transparent	2	0	1
9000 lm	4000 K	57.8	156	32	Type III - Asymmetric	Transparent	2	0	2
9000 lm	4000 K	57.8	156	32	Type IV - C	Transparent	2	0	2
10500 lm	2700 K	74.8	140	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	2700 K	74.8	140	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	2700 K	74.8	140	32	Type I - Center road	Transparent	3	0	3
10500 lm	2700 K	74.8	140	32	Type III - B	Transparent	2	0	2
10500 lm	2700 K	74.8	140	32	Type III - C	Transparent	2	0	2
10500 lm	2700 K	74.8	140	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	2700 K	74.8	140	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	2700 K	74.8	140	32	Type IV - C	Transparent	2	0	2
10500 lm	3000 K	71.6	147	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	3000 K	71.6	147	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	3000 K	71.6	147	32	Type I - Center road	Transparent	3	0	3
10500 lm	3000 K	71.6	147	32	Type III - B	Transparent	2	0	2

## Polis Lateral | Luminaire | Polis Lateral

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
10500 lm	3000 K	71.6	147	32	Type III - C	Transparent	2	0	2
10500 lm	3000 K	71.6	147	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	3000 K	71.6	147	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	3000 K	71.6	147	32	Type IV - C	Transparent	2	0	2
10500 lm	4000 K	68.3	154	32	Type IV - Forward throw	Transparent	2	0	2
10500 lm	4000 K	68.3	154	32	Type V - Rotosymmetric	Transparent	3	0	1
10500 lm	4000 K	68.3	154	32	Type I - Center road	Transparent	3	0	3
10500 lm	4000 K	68.3	154	32	Type III - B	Transparent	2	0	2
10500 lm	4000 K	68.3	154	32	Type III - C	Transparent	2	0	2
10500 lm	4000 K	68.3	154	32	Type II - Asymmetric	Transparent	2	0	2
10500 lm	4000 K	68.3	154	32	Type III - Asymmetric	Transparent	2	0	2
10500 lm	4000 K	68.3	154	32	Type IV - C	Transparent	2	0	2
12000 lm	2700 K	87.9	137	32	Type IV - Forward throw	Transparent	2	0	2
12000 lm	2700 K	87.9	137	32	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	2700 K	87.9	137	32	Type I - Center road	Transparent	3	0	3
12000 lm	2700 K	87.9	137	32	Type III - B	Transparent	2	0	2
12000 lm	2700 K	87.9	137	32	Type III - C	Transparent	2	0	2
12000 lm	2700 K	87.9	137	32	Type II - Asymmetric	Transparent	2	0	2
12000 lm	2700 K	87.9	137	32	Type III - Asymmetric	Transparent	2	0	2
12000 lm	2700 K	87.9	137	32	Type IV - C	Transparent	2	0	2
12000 lm	3000 K	84.2	143	32	Type IV - Forward throw	Transparent	2	0	2
12000 lm	3000 K	84.2	143	32	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	3000 K	84.2	143	32	Type I - Center road	Transparent	3	0	3
12000 lm	3000 K	84.2	143	32	Type III - B	Transparent	2	0	2
12000 lm	3000 K	84.2	143	32	Type III - C	Transparent	2	0	2
12000 lm	3000 K	84.2	143	32	Type II - Asymmetric	Transparent	2	0	2
12000 lm	3000 K	84.2	143	32	Type III - Asymmetric	Transparent	2	0	2
12000 lm	3000 K	84.2	143	32	Type IV - C	Transparent	2	0	2
12000 lm	4000 K	80.3	149	32	Type IV - Forward throw	Transparent	2	0	2
12000 lm	4000 K	80.3	149	32	Type V - Rotosymmetric	Transparent	3	0	2
12000 lm	4000 K	80.3	149	32	Type I - Center road	Transparent	3	0	3
12000 lm	4000 K	80.3	149	32	Type III - B	Transparent	2	0	2
12000 lm	4000 K	80.3	149	32	Type III - C	Transparent	2	0	2
12000 lm	4000 K	80.3	149	32	Type II - Asymmetric	Transparent	2	0	2
12000 lm	4000 K	80.3	149	32	Type III - Asymmetric	Transparent	2	0	2
12000 lm	4000 K	80.3	149	32	Type IV - C	Transparent	2	0	2
13500 lm	2700 K	93.5	144	48	Type IV - Forward throw	Transparent	2	0	2
13500 lm	2700 K	93.5	144	48	Type V - Rotosymmetric	Transparent	3	0	2
13500 lm	2700 K	93.5	144	48	Type I - Center road	Transparent	3	0	3
13500 lm	2700 K	93.5	144	48	Type III - B	Transparent	2	0	2
13500 lm	2700 K	93.5	144	48	Type III - C	Transparent	3	0	3
13500 lm	2700 K	93.5	144	48	Type II - Asymmetric	Transparent	2	0	2
13500 lm	2700 K	93.5	144	48	Type III - Asymmetric	Transparent	2	0	2
13500 lm	2700 K	93.5	144	48	Type IV - C	Transparent	2	0	2
13500 lm	3000 K	89.8	150	48	Type IV - Forward throw	Transparent	2	0	2
13500 lm	3000 K	89.8	150	48	Type V - Rotosymmetric	Transparent	3	0	2
13500 lm	3000 K	89.8	150	48	Type I - Center road	Transparent	3	0	3
13500 lm	3000 K	89.8	150	48	Type III - B	Transparent	2	0	2
13500 lm	3000 K	89.8	150	48	Type III - C	Transparent	3	0	3
13500 lm	3000 K	89.8	150	48	Type II - Asymmetric	Transparent	2	0	2
13500 lm	3000 K	89.8	150	48	Type III - Asymmetric	Transparent	2	0	2
13500 lm	3000 K	89.8	150	48	Type IV - C	Transparent	2	0	2
13500 lm	4000 K	85.7	158	48	Type IV - Forward throw	Transparent	2	0	2
13500 lm	4000 K	85.7	158	48	Type V - Rotosymmetric	Transparent	3	0	2
13500 lm	4000 K	85.7	158	48	Type I - Center road	Transparent	3	0	3

## Polis Lateral | Luminaire | Polis Lateral

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
13500 lm	4000 K	85.7	158	48	Type III - B	Transparent	2	0	2
13500 lm	4000 K	85.7	158	48	Type III - C	Transparent	3	0	3
13500 lm	4000 K	85.7	158	48	Type II - Asymmetric	Transparent	2	0	2
13500 lm	4000 K	85.7	158	48	Type III - Asymmetric	Transparent	2	0	2
13500 lm	4000 K	85.7	158	48	Type IV - C	Transparent	2	0	2