


Polis Catenary | Luminaire | Polis Catenary

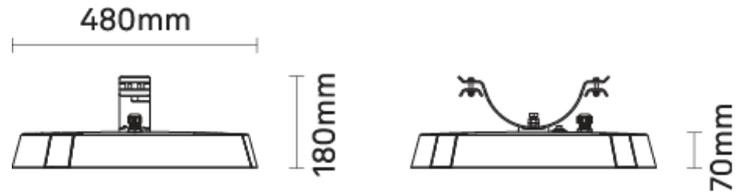

Ordering Information / Guide

Example: **LUPOL03-U-D30-730-L035-ST-V0-F35-MU-CNO**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D28 T1 short	722 Ra70 2200 K	L015 1500 lm	ST Transparent	V0 120V-277V	F35 0-10V+CLO	MU UL	CNO Grey [Neri] Textured
D36 T2 medium	727 Ra70 2700 K	L025 2500 lm			F11 NEMA-3		
D22 T3 narrow	730 Ra70 3000 K	L035 3500 lm			F12 NEMA-7		
D25 T2 narrow	740 Ra70 4000 K	L045 4500 lm					
D37 T3 medium		L060 6000 lm					
D24 T4 wide		L075 7500 lm					
D38 T4 medium		L090 9000 lm					
D30 T5 square medium		L105 10500 lm					
		L120 12000 lm					

Generated code: **LUPOL03 - U** - _____

Polis Catenary | Luminaire | Polis Catenary

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

ELECTRICAL CHARACTERISTICS

Cable length 3.281 ft

Cable type 5GAWG18 SJTW

MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminum (UNI EN 1706) with a main body in cast aluminum and an integrated heat sink.

Protective shield in extra-clear screen-printed tempered glass with IK09 impact resistance (EN 62262) and white internal reflector in polycarbonate. EPDM seal between glass and upper cover, support with curved flat frame, and ±15° tilting system for vertical adjustment.

Stainless steel safety cable Ø 0.12 in, stainless steel fasteners, and top cable entry (max Ø 0.47 in).

INSTALLATION

Tensioned support for steel cables with maximum diameter Ø 1/2".

Tilting attachment adjustable ±15°.

WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Polis Catenary | Luminaire | Polis Catenary


T1 short

Transparent

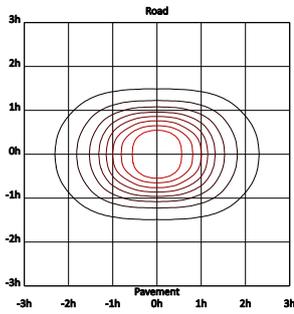


T2 medium

Transparent

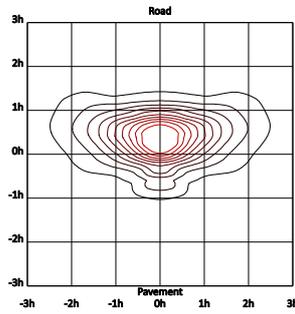


T3 narrow

Transparent

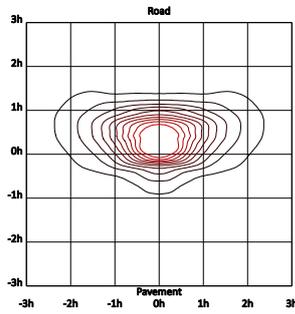


T2 narrow

Transparent

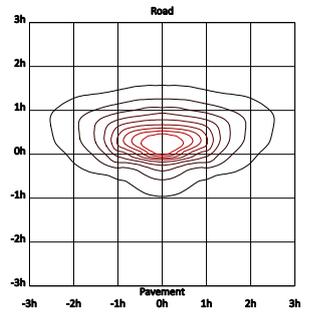


T3 medium

Transparent

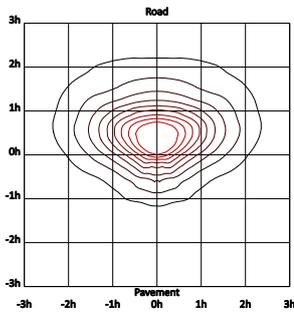


T4 wide

Transparent

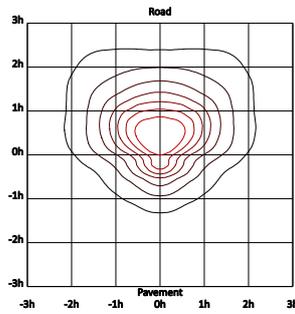


T4 medium

Transparent

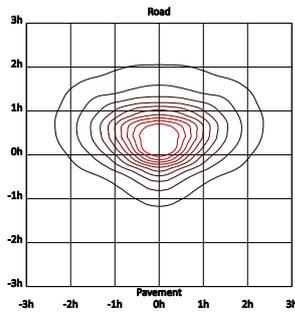

T5 square medium

Transparent

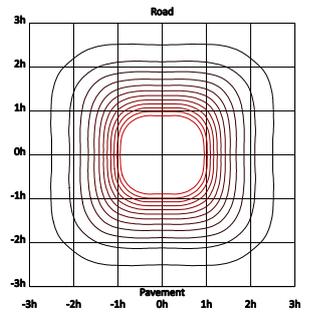

Polis Catenary | Luminaire | Polis Catenary

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
3500 lm	2700 K	23.8	147	16	T4 wide	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	T5 square medium	Transparent	2	0	0
3500 lm	2700 K	23.8	147	16	T1 short	Transparent	2	0	1
3500 lm	2700 K	23.8	147	16	T3 narrow	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	T2 narrow	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	T2 medium	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	T3 medium	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	T4 medium	Transparent	1	0	1
3500 lm	3000 K	23.2	151	16	T4 wide	Transparent	1	0	1
3500 lm	3000 K	23.2	151	16	T5 square medium	Transparent	2	0	0
3500 lm	3000 K	23.2	151	16	T1 short	Transparent	2	0	1
3500 lm	3000 K	23.2	151	16	T3 narrow	Transparent	1	0	1
3500 lm	3000 K	23.2	151	16	T2 narrow	Transparent	1	0	1
3500 lm	3000 K	23.2	151	16	T2 medium	Transparent	1	0	1
3500 lm	3000 K	23.2	151	16	T3 medium	Transparent	1	0	1
3500 lm	3000 K	23.2	151	16	T4 medium	Transparent	1	0	1
3500 lm	4000 K	22.1	158	16	T4 wide	Transparent	1	0	1
3500 lm	4000 K	22.1	158	16	T5 square medium	Transparent	2	0	0
3500 lm	4000 K	22.1	158	16	T1 short	Transparent	2	0	1
3500 lm	4000 K	22.1	158	16	T3 narrow	Transparent	1	0	1
3500 lm	4000 K	22.1	158	16	T2 narrow	Transparent	1	0	1
3500 lm	4000 K	22.1	158	16	T2 medium	Transparent	1	0	1
3500 lm	4000 K	22.1	158	16	T3 medium	Transparent	1	0	1
3500 lm	4000 K	22.1	158	16	T4 medium	Transparent	1	0	1
3500 lm	2200 K	27.5	127	16	T4 wide	Transparent	1	0	1
3500 lm	2200 K	27.5	127	16	T5 square medium	Transparent	2	0	0
3500 lm	2200 K	27.5	127	16	T1 short	Transparent	2	0	1
3500 lm	2200 K	27.5	127	16	T3 narrow	Transparent	1	0	1
3500 lm	2200 K	27.5	127	16	T2 narrow	Transparent	1	0	1
3500 lm	2200 K	27.5	127	16	T2 medium	Transparent	1	0	1
3500 lm	2200 K	27.5	127	16	T3 medium	Transparent	1	0	1
3500 lm	2200 K	27.5	127	16	T4 medium	Transparent	1	0	1
1500 lm	2700 K	10.4	144	16	T4 wide	Transparent	0	0	0
1500 lm	2700 K	10.4	144	16	T5 square medium	Transparent	1	0	0
1500 lm	2700 K	10.4	144	16	T1 short	Transparent	1	0	1
1500 lm	2700 K	10.4	144	16	T3 narrow	Transparent	0	0	0
1500 lm	2700 K	10.4	144	16	T2 narrow	Transparent	1	0	1
1500 lm	2700 K	10.4	144	16	T2 medium	Transparent	0	0	0
1500 lm	2700 K	10.4	144	16	T3 medium	Transparent	0	0	0
1500 lm	2700 K	10.4	144	16	T4 medium	Transparent	0	0	0
1500 lm	3000 K	10.2	147	16	T4 wide	Transparent	0	0	0
1500 lm	3000 K	10.2	147	16	T5 square medium	Transparent	1	0	0
1500 lm	3000 K	10.2	147	16	T1 short	Transparent	1	0	1
1500 lm	3000 K	10.2	147	16	T3 narrow	Transparent	0	0	0
1500 lm	3000 K	10.2	147	16	T2 narrow	Transparent	1	0	1
1500 lm	3000 K	10.2	147	16	T2 medium	Transparent	0	0	0
1500 lm	3000 K	10.2	147	16	T3 medium	Transparent	0	0	0
1500 lm	3000 K	10.2	147	16	T4 medium	Transparent	0	0	0
1500 lm	4000 K	9.7	155	16	T4 wide	Transparent	0	0	0
1500 lm	4000 K	9.7	155	16	T5 square medium	Transparent	1	0	0
1500 lm	4000 K	9.7	155	16	T1 short	Transparent	1	0	1
1500 lm	4000 K	9.7	155	16	T3 narrow	Transparent	0	0	0
1500 lm	4000 K	9.7	155	16	T2 narrow	Transparent	1	0	1
1500 lm	4000 K	9.7	155	16	T2 medium	Transparent	0	0	0
1500 lm	4000 K	9.7	155	16	T3 medium	Transparent	0	0	0

Polis Catenary | Luminaire | Polis Catenary

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							0	0	0
1500 lm	4000 K	9.7	155	16	T4 medium	Transparent	0	0	0
1500 lm	2200 K	11.4	132	16	T4 wide	Transparent	0	0	0
1500 lm	2200 K	11.4	132	16	T5 square medium	Transparent	1	0	0
1500 lm	2200 K	11.4	132	16	T1 short	Transparent	1	0	1
1500 lm	2200 K	11.4	132	16	T3 narrow	Transparent	0	0	0
1500 lm	2200 K	11.4	132	16	T2 narrow	Transparent	1	0	1
1500 lm	2200 K	11.4	132	16	T2 medium	Transparent	0	0	0
1500 lm	2200 K	11.4	132	16	T3 medium	Transparent	0	0	0
1500 lm	2200 K	11.4	132	16	T4 medium	Transparent	0	0	0
2500 lm	2700 K	17	147	16	T4 wide	Transparent	1	0	1
2500 lm	2700 K	17	147	16	T5 square medium	Transparent	1	0	0
2500 lm	2700 K	17	147	16	T1 short	Transparent	1	0	1
2500 lm	2700 K	17	147	16	T3 narrow	Transparent	1	0	1
2500 lm	2700 K	17	147	16	T2 narrow	Transparent	1	0	1
2500 lm	2700 K	17	147	16	T2 medium	Transparent	1	0	1
2500 lm	2700 K	17	147	16	T3 medium	Transparent	1	0	1
2500 lm	2700 K	17	147	16	T4 medium	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	T4 wide	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	T5 square medium	Transparent	1	0	0
2500 lm	3000 K	16.6	151	16	T1 short	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	T3 narrow	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	T2 narrow	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	T2 medium	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	T3 medium	Transparent	1	0	1
2500 lm	3000 K	16.6	151	16	T4 medium	Transparent	1	0	1
2500 lm	4000 K	15.8	158	16	T4 wide	Transparent	1	0	1
2500 lm	4000 K	15.8	158	16	T5 square medium	Transparent	1	0	0
2500 lm	4000 K	15.8	158	16	T1 short	Transparent	1	0	1
2500 lm	4000 K	15.8	158	16	T3 narrow	Transparent	1	0	1
2500 lm	4000 K	15.8	158	16	T2 narrow	Transparent	1	0	1
2500 lm	4000 K	15.8	158	16	T2 medium	Transparent	1	0	1
2500 lm	4000 K	15.8	158	16	T3 medium	Transparent	1	0	1
2500 lm	4000 K	15.8	158	16	T4 medium	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	T4 wide	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	T5 square medium	Transparent	1	0	0
2500 lm	2200 K	18.8	133	16	T1 short	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	T3 narrow	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	T2 narrow	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	T2 medium	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	T3 medium	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	T4 medium	Transparent	1	0	1
4500 lm	2700 K	32.5	138	16	T4 wide	Transparent	1	0	1
4500 lm	2700 K	32.5	138	16	T5 square medium	Transparent	2	0	1
4500 lm	2700 K	32.5	138	16	T1 short	Transparent	2	0	1
4500 lm	2700 K	32.5	138	16	T3 narrow	Transparent	1	0	1
4500 lm	2700 K	32.5	138	16	T2 narrow	Transparent	1	0	1
4500 lm	2700 K	32.5	138	16	T2 medium	Transparent	1	0	1
4500 lm	2700 K	32.5	138	16	T3 medium	Transparent	1	0	1
4500 lm	2700 K	32.5	138	16	T4 medium	Transparent	1	0	1
4500 lm	3000 K	31.6	142	16	T4 wide	Transparent	1	0	1
4500 lm	3000 K	31.6	142	16	T5 square medium	Transparent	2	0	1
4500 lm	3000 K	31.6	142	16	T1 short	Transparent	2	0	1
4500 lm	3000 K	31.6	142	16	T3 narrow	Transparent	1	0	1
4500 lm	3000 K	31.6	142	16	T2 narrow	Transparent	1	0	1
4500 lm	3000 K	31.6	142	16	T2 medium	Transparent	1	0	1

Polis Catenary | Luminaire | Polis Catenary

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
4500 lm	3000 K	31.6	142	16	T3 medium	Transparent	1	0	1
4500 lm	3000 K	31.6	142	16	T4 medium	Transparent	1	0	1
4500 lm	4000 K	30.1	150	16	T4 wide	Transparent	1	0	1
4500 lm	4000 K	30.1	150	16	T5 square medium	Transparent	2	0	1
4500 lm	4000 K	30.1	150	16	T1 short	Transparent	2	0	1
4500 lm	4000 K	30.1	150	16	T3 narrow	Transparent	1	0	1
4500 lm	4000 K	30.1	150	16	T2 narrow	Transparent	1	0	1
4500 lm	4000 K	30.1	150	16	T2 medium	Transparent	1	0	1
4500 lm	4000 K	30.1	150	16	T3 medium	Transparent	1	0	1
4500 lm	4000 K	30.1	150	16	T4 medium	Transparent	1	0	1
4500 lm	2200 K	36.3	124	16	T4 wide	Transparent	1	0	1
4500 lm	2200 K	36.3	124	16	T5 square medium	Transparent	2	0	1
4500 lm	2200 K	36.3	124	16	T1 short	Transparent	2	0	1
4500 lm	2200 K	36.3	124	16	T3 narrow	Transparent	1	0	1
4500 lm	2200 K	36.3	124	16	T2 narrow	Transparent	1	0	1
4500 lm	2200 K	36.3	124	16	T2 medium	Transparent	1	0	1
4500 lm	2200 K	36.3	124	16	T3 medium	Transparent	1	0	1
4500 lm	2200 K	36.3	124	16	T4 medium	Transparent	1	0	1
6000 lm	2700 K	42.9	140	24	T4 wide	Transparent	1	0	1
6000 lm	2700 K	42.9	140	24	T5 square medium	Transparent	3	0	1
6000 lm	2700 K	42.9	140	24	T1 short	Transparent	2	0	2
6000 lm	2700 K	42.9	140	24	T3 narrow	Transparent	1	0	1
6000 lm	2700 K	42.9	140	24	T2 narrow	Transparent	1	0	1
6000 lm	2700 K	42.9	140	24	T2 medium	Transparent	1	0	1
6000 lm	2700 K	42.9	140	24	T3 medium	Transparent	1	0	1
6000 lm	2700 K	42.9	140	24	T4 medium	Transparent	1	0	1
6000 lm	3000 K	41.8	144	24	T4 wide	Transparent	1	0	1
6000 lm	3000 K	41.8	144	24	T5 square medium	Transparent	3	0	1
6000 lm	3000 K	41.8	144	24	T1 short	Transparent	2	0	2
6000 lm	3000 K	41.8	144	24	T3 narrow	Transparent	1	0	1
6000 lm	3000 K	41.8	144	24	T2 narrow	Transparent	1	0	1
6000 lm	3000 K	41.8	144	24	T2 medium	Transparent	1	0	1
6000 lm	3000 K	41.8	144	24	T3 medium	Transparent	1	0	1
6000 lm	3000 K	41.8	144	24	T4 medium	Transparent	1	0	1
6000 lm	4000 K	39.9	150	24	T4 wide	Transparent	1	0	1
6000 lm	4000 K	39.9	150	24	T5 square medium	Transparent	3	0	1
6000 lm	4000 K	39.9	150	24	T1 short	Transparent	2	0	2
6000 lm	4000 K	39.9	150	24	T3 narrow	Transparent	1	0	1
6000 lm	4000 K	39.9	150	24	T2 narrow	Transparent	1	0	1
6000 lm	4000 K	39.9	150	24	T2 medium	Transparent	1	0	1
6000 lm	4000 K	39.9	150	24	T3 medium	Transparent	1	0	1
6000 lm	4000 K	39.9	150	24	T4 medium	Transparent	1	0	1
6000 lm	2200 K	47.8	126	24	T4 wide	Transparent	1	0	1
6000 lm	2200 K	47.8	126	24	T5 square medium	Transparent	3	0	1
6000 lm	2200 K	47.8	126	24	T1 short	Transparent	2	0	2
6000 lm	2200 K	47.8	126	24	T3 narrow	Transparent	1	0	1
6000 lm	2200 K	47.8	126	24	T2 narrow	Transparent	1	0	1
6000 lm	2200 K	47.8	126	24	T2 medium	Transparent	1	0	1
6000 lm	2200 K	47.8	126	24	T3 medium	Transparent	1	0	1
6000 lm	2200 K	47.8	126	24	T4 medium	Transparent	1	0	1
7500 lm	2700 K	54.6	137	24	T4 wide	Transparent	1	0	2
7500 lm	2700 K	54.6	137	24	T5 square medium	Transparent	3	0	1
7500 lm	2700 K	54.6	137	24	T1 short	Transparent	2	0	2
7500 lm	2700 K	54.6	137	24	T3 narrow	Transparent	2	0	1
7500 lm	2700 K	54.6	137	24	T2 narrow	Transparent	2	0	2

Polis Catenary | Luminaire | Polis Catenary

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7500 lm	2700 K	54.6	137	24	T2 medium	Transparent	2	0	1
7500 lm	2700 K	54.6	137	24	T3 medium	Transparent	1	0	2
7500 lm	2700 K	54.6	137	24	T4 medium	Transparent	1	0	1
7500 lm	3000 K	53.1	141	24	T4 wide	Transparent	1	0	2
7500 lm	3000 K	53.1	141	24	T5 square medium	Transparent	3	0	1
7500 lm	3000 K	53.1	141	24	T1 short	Transparent	2	0	2
7500 lm	3000 K	53.1	141	24	T3 narrow	Transparent	2	0	1
7500 lm	3000 K	53.1	141	24	T2 narrow	Transparent	2	0	2
7500 lm	3000 K	53.1	141	24	T2 medium	Transparent	2	0	1
7500 lm	3000 K	53.1	141	24	T3 medium	Transparent	1	0	2
7500 lm	3000 K	53.1	141	24	T4 medium	Transparent	1	0	1
7500 lm	4000 K	50.5	149	24	T4 wide	Transparent	1	0	2
7500 lm	4000 K	50.5	149	24	T5 square medium	Transparent	3	0	1
7500 lm	4000 K	50.5	149	24	T1 short	Transparent	2	0	2
7500 lm	4000 K	50.5	149	24	T3 narrow	Transparent	2	0	1
7500 lm	4000 K	50.5	149	24	T2 narrow	Transparent	2	0	2
7500 lm	4000 K	50.5	149	24	T2 medium	Transparent	2	0	1
7500 lm	4000 K	50.5	149	24	T3 medium	Transparent	1	0	2
7500 lm	4000 K	50.5	149	24	T4 medium	Transparent	1	0	1
7500 lm	2200 K	60.9	123	24	T4 wide	Transparent	1	0	2
7500 lm	2200 K	60.9	123	24	T5 square medium	Transparent	3	0	1
7500 lm	2200 K	60.9	123	24	T1 short	Transparent	2	0	2
7500 lm	2200 K	60.9	123	24	T3 narrow	Transparent	2	0	1
7500 lm	2200 K	60.9	123	24	T2 narrow	Transparent	2	0	2
7500 lm	2200 K	60.9	123	24	T2 medium	Transparent	2	0	1
7500 lm	2200 K	60.9	123	24	T3 medium	Transparent	1	0	2
7500 lm	2200 K	60.9	123	24	T4 medium	Transparent	1	0	1
9000 lm	2700 K	63.7	141	32	T4 wide	Transparent	2	0	2
9000 lm	2700 K	63.7	141	32	T5 square medium	Transparent	3	0	1
9000 lm	2700 K	63.7	141	32	T1 short	Transparent	3	0	2
9000 lm	2700 K	63.7	141	32	T3 narrow	Transparent	2	0	2
9000 lm	2700 K	63.7	141	32	T2 narrow	Transparent	2	0	2
9000 lm	2700 K	63.7	141	32	T2 medium	Transparent	2	0	1
9000 lm	2700 K	63.7	141	32	T3 medium	Transparent	2	0	2
9000 lm	2700 K	63.7	141	32	T4 medium	Transparent	2	0	2
9000 lm	3000 K	61.9	145	32	T4 wide	Transparent	2	0	2
9000 lm	3000 K	61.9	145	32	T5 square medium	Transparent	3	0	1
9000 lm	3000 K	61.9	145	32	T1 short	Transparent	3	0	2
9000 lm	3000 K	61.9	145	32	T3 narrow	Transparent	2	0	2
9000 lm	3000 K	61.9	145	32	T2 narrow	Transparent	2	0	2
9000 lm	3000 K	61.9	145	32	T2 medium	Transparent	2	0	1
9000 lm	3000 K	61.9	145	32	T3 medium	Transparent	2	0	2
9000 lm	3000 K	61.9	145	32	T4 medium	Transparent	2	0	2
9000 lm	4000 K	59	153	32	T4 wide	Transparent	2	0	2
9000 lm	4000 K	59	153	32	T5 square medium	Transparent	3	0	1
9000 lm	4000 K	59	153	32	T1 short	Transparent	3	0	2
9000 lm	4000 K	59	153	32	T3 narrow	Transparent	2	0	2
9000 lm	4000 K	59	153	32	T2 narrow	Transparent	2	0	2
9000 lm	4000 K	59	153	32	T2 medium	Transparent	2	0	1
9000 lm	4000 K	59	153	32	T3 medium	Transparent	2	0	2
9000 lm	4000 K	59	153	32	T4 medium	Transparent	2	0	2
9000 lm	2200 K	70.8	127	32	T4 wide	Transparent	2	0	2
9000 lm	2200 K	70.8	127	32	T5 square medium	Transparent	3	0	1
9000 lm	2200 K	70.8	127	32	T1 short	Transparent	3	0	2
9000 lm	2200 K	70.8	127	32	T3 narrow	Transparent	2	0	2

Polis Catenary | Luminaire | Polis Catenary

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
9000 lm	2200 K	70.8	127	32	T2 narrow	Transparent	2	0	2
9000 lm	2200 K	70.8	127	32	T2 medium	Transparent	2	0	1
9000 lm	2200 K	70.8	127	32	T3 medium	Transparent	2	0	2
9000 lm	2200 K	70.8	127	32	T4 medium	Transparent	2	0	2
10500 lm	2700 K	75.2	140	32	T4 wide	Transparent	2	0	2
10500 lm	2700 K	75.2	140	32	T5 square medium	Transparent	3	0	1
10500 lm	2700 K	75.2	140	32	T1 short	Transparent	3	0	3
10500 lm	2700 K	75.2	140	32	T3 narrow	Transparent	2	0	2
10500 lm	2700 K	75.2	140	32	T2 narrow	Transparent	2	0	2
10500 lm	2700 K	75.2	140	32	T2 medium	Transparent	2	0	2
10500 lm	2700 K	75.2	140	32	T3 medium	Transparent	2	0	2
10500 lm	2700 K	75.2	140	32	T4 medium	Transparent	2	0	2
10500 lm	3000 K	73.1	144	32	T4 wide	Transparent	2	0	2
10500 lm	3000 K	73.1	144	32	T5 square medium	Transparent	3	0	1
10500 lm	3000 K	73.1	144	32	T1 short	Transparent	3	0	3
10500 lm	3000 K	73.1	144	32	T3 narrow	Transparent	2	0	2
10500 lm	3000 K	73.1	144	32	T2 narrow	Transparent	2	0	2
10500 lm	3000 K	73.1	144	32	T2 medium	Transparent	2	0	2
10500 lm	3000 K	73.1	144	32	T3 medium	Transparent	2	0	2
10500 lm	3000 K	73.1	144	32	T4 medium	Transparent	2	0	2
10500 lm	4000 K	69.7	151	32	T4 wide	Transparent	2	0	2
10500 lm	4000 K	69.7	151	32	T5 square medium	Transparent	3	0	1
10500 lm	4000 K	69.7	151	32	T1 short	Transparent	3	0	3
10500 lm	4000 K	69.7	151	32	T3 narrow	Transparent	2	0	2
10500 lm	4000 K	69.7	151	32	T2 narrow	Transparent	2	0	2
10500 lm	4000 K	69.7	151	32	T2 medium	Transparent	2	0	2
10500 lm	4000 K	69.7	151	32	T3 medium	Transparent	2	0	2
10500 lm	4000 K	69.7	151	32	T4 medium	Transparent	2	0	2
12000 lm	2700 K	87.2	138	32	T4 wide	Transparent	2	0	2
12000 lm	2700 K	87.2	138	32	T5 square medium	Transparent	3	0	2
12000 lm	2700 K	87.2	138	32	T1 short	Transparent	3	0	3
12000 lm	2700 K	87.2	138	32	T3 narrow	Transparent	2	0	2
12000 lm	2700 K	87.2	138	32	T2 narrow	Transparent	2	0	2
12000 lm	2700 K	87.2	138	32	T2 medium	Transparent	2	0	2
12000 lm	2700 K	87.2	138	32	T3 medium	Transparent	2	0	2
12000 lm	2700 K	87.2	138	32	T4 medium	Transparent	2	0	2
12000 lm	3000 K	84.6	142	32	T4 wide	Transparent	2	0	2
12000 lm	3000 K	84.6	142	32	T5 square medium	Transparent	3	0	2
12000 lm	3000 K	84.6	142	32	T1 short	Transparent	3	0	3
12000 lm	3000 K	84.6	142	32	T3 narrow	Transparent	2	0	2
12000 lm	3000 K	84.6	142	32	T2 narrow	Transparent	2	0	2
12000 lm	3000 K	84.6	142	32	T2 medium	Transparent	2	0	2
12000 lm	3000 K	84.6	142	32	T3 medium	Transparent	2	0	2
12000 lm	3000 K	84.6	142	32	T4 medium	Transparent	2	0	2
12000 lm	4000 K	80.7	149	32	T4 wide	Transparent	2	0	2
12000 lm	4000 K	80.7	149	32	T5 square medium	Transparent	3	0	2
12000 lm	4000 K	80.7	149	32	T1 short	Transparent	3	0	3
12000 lm	4000 K	80.7	149	32	T3 narrow	Transparent	2	0	2
12000 lm	4000 K	80.7	149	32	T2 narrow	Transparent	2	0	2
12000 lm	4000 K	80.7	149	32	T2 medium	Transparent	2	0	2
12000 lm	4000 K	80.7	149	32	T3 medium	Transparent	2	0	2
12000 lm	4000 K	80.7	149	32	T4 medium	Transparent	2	0	2