


RNC20 | Refitting kit | RNC20

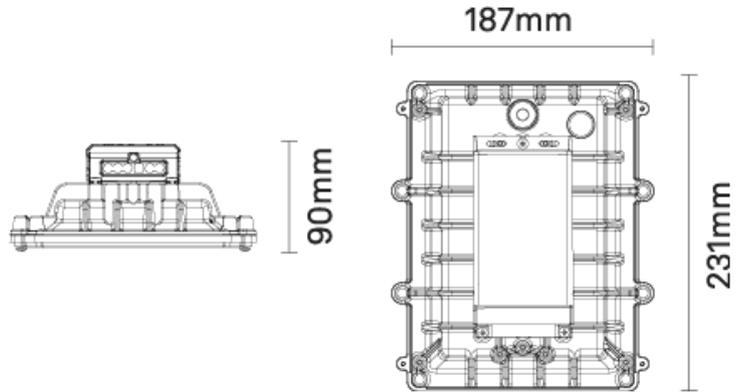

Ordering Information / Guide

Example: **RNC20-N-D20-730-L035-ST-V1-F22-M2-CW0**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D28 Type I - Center road	730 Ra70 3000 K	L025 2500 lm	ST Transparent	V1 220V-240V	F27 ON/OFF+CLO	M2 Class II	CW0 White [RAL 9010] Textured
D20 Type II - A	740 Ra70 4000 K	L035 3500 lm			F22 NVLC+CLO		
D21 Type II - A		L045 4500 lm					
D24 Type IV - Forward throw		L060 6000 lm					
D30 Type V - Rotosymmetric		L075 7500 lm					

Generated code: **RNC20 - N** - _ _ _ _ _

RNC20 | Refitting kit | RNC20

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

ELECTRICAL CHARACTERISTICS

Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778.
ENEC safety mark.

MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminium (UNI EN 1706) with an integrated heat sink and extra-clear toughened glass protective screen with IK09 impact resistance (EN 62262).

Polycarbonate frame for mounting the kit to the plate, osmotic valve for internal/external pressure balancing, and provision for auxiliary devices compliant with Zhaga Book 18.

Body supported by galvanized steel and stainless steel screws.

INSTALLATION

The refitting module is designed for fastening on the deck kit.

Deck kits for Neri products can be ordered separately.

For installation on third-party lanterns, please contact the company.

The kit is designed to integrate a pre-existing luminaire and therefore inherits its IP rating and IK rating.

WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

RNC20 | Refitting kit | RNC20


Type I - Center road

Transparent

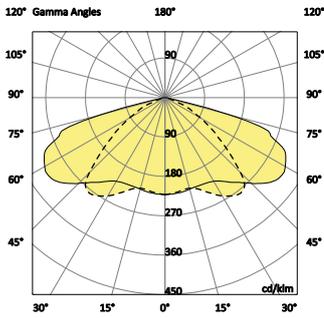


Type II - A

Transparent

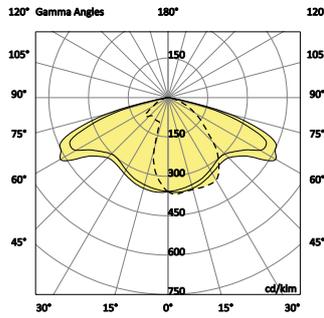


Type II - A

Transparent

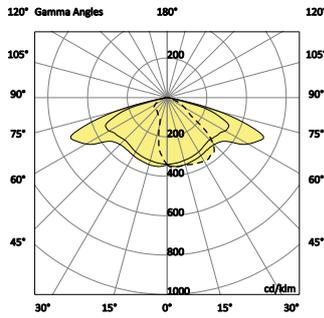


Type IV - Forward throw

Transparent

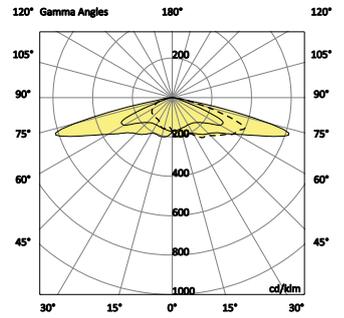

Type V - Rotosymmetric

Transparent

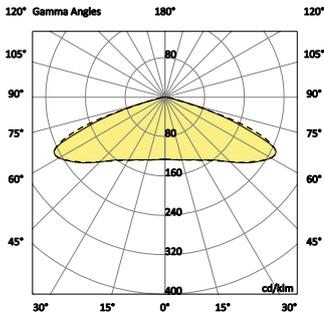

RNC20 | Refitting kit | RNC20

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
3500 lm	3000 K	28.2	124	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	3000 K	28.2	124	16	Type II - A	Transparent	1	0	1
3500 lm	3000 K	28.2	124	16	Type V - Rotosymmetric	Transparent	2	0	1
3500 lm	3000 K	28.2	124	16	Type I - Center road	Transparent	2	0	1
3500 lm	3000 K	28.2	124	16	Type II - A	Transparent	1	0	1
3500 lm	4000 K	26.7	131	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	4000 K	26.7	131	16	Type II - A	Transparent	1	0	1
3500 lm	4000 K	26.7	131	16	Type V - Rotosymmetric	Transparent	2	0	1
3500 lm	4000 K	26.7	131	16	Type I - Center road	Transparent	2	0	1
3500 lm	4000 K	26.7	131	16	Type II - A	Transparent	1	0	1
4500 lm	3000 K	35.1	128	24	Type IV - Forward throw	Transparent	1	0	1
4500 lm	3000 K	35.1	128	24	Type II - A	Transparent	1	0	1
4500 lm	3000 K	35.1	128	24	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	3000 K	35.1	128	24	Type I - Center road	Transparent	2	0	1
4500 lm	3000 K	35.1	128	24	Type II - A	Transparent	1	0	1
4500 lm	4000 K	33.3	135	24	Type IV - Forward throw	Transparent	1	0	1
4500 lm	4000 K	33.3	135	24	Type II - A	Transparent	1	0	1
4500 lm	4000 K	33.3	135	24	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	4000 K	33.3	135	24	Type I - Center road	Transparent	2	0	1
4500 lm	4000 K	33.3	135	24	Type II - A	Transparent	1	0	1
6000 lm	3000 K	49.1	122	24	Type IV - Forward throw	Transparent	1	0	2
6000 lm	3000 K	49.1	122	24	Type II - A	Transparent	2	0	1
6000 lm	3000 K	49.1	122	24	Type V - Rotosymmetric	Transparent	3	0	1
6000 lm	3000 K	49.1	122	24	Type I - Center road	Transparent	2	0	2
6000 lm	3000 K	49.1	122	24	Type II - A	Transparent	2	0	1
6000 lm	4000 K	46.5	129	24	Type IV - Forward throw	Transparent	1	0	2
6000 lm	4000 K	46.5	129	24	Type II - A	Transparent	2	0	1
6000 lm	4000 K	46.5	129	24	Type V - Rotosymmetric	Transparent	3	0	1
6000 lm	4000 K	46.5	129	24	Type I - Center road	Transparent	2	0	2
6000 lm	4000 K	46.5	129	24	Type II - A	Transparent	2	0	1
7500 lm	4000 K	60.7	124	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	4000 K	60.7	124	24	Type II - A	Transparent	2	0	2
7500 lm	4000 K	60.7	124	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	4000 K	60.7	124	24	Type I - Center road	Transparent	2	0	2
7500 lm	4000 K	60.7	124	24	Type II - A	Transparent	2	0	2
2500 lm	3000 K	19.4	129	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	3000 K	19.4	129	16	Type II - A	Transparent	1	0	1
2500 lm	3000 K	19.4	129	16	Type V - Rotosymmetric	Transparent	2	0	1
2500 lm	3000 K	19.4	129	16	Type I - Center road	Transparent	1	0	1
2500 lm	3000 K	19.4	129	16	Type II - A	Transparent	1	0	1
2500 lm	4000 K	18.4	136	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	4000 K	18.4	136	16	Type II - A	Transparent	1	0	1
2500 lm	4000 K	18.4	136	16	Type V - Rotosymmetric	Transparent	2	0	1
2500 lm	4000 K	18.4	136	16	Type I - Center road	Transparent	1	0	1
2500 lm	4000 K	18.4	136	16	Type II - A	Transparent	1	0	1