


RNC21 | Refitting kit | Kit in aluminium

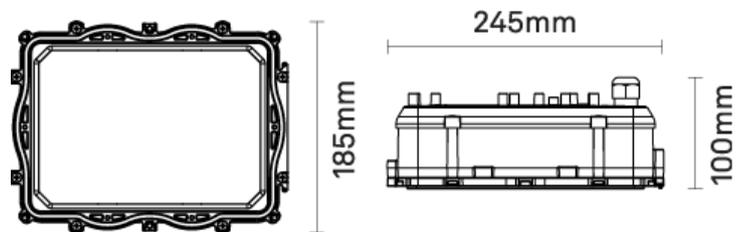

Ordering Information / Guide

Example: **RNC21-N-D28-730-L025-ST-V1-F02-M2-CW0**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D28 Type I - Center road	722 Ra70 2200 K	L015 1500 lm	ST Transparent	V1 220V-240V	F27 ON/OFF+CLO	M1 Class I	CW0 White [RAL 9010] Textured
D36 Type II - Asymmetric	727 Ra70 2700 K	L025 2500 lm	SP Prismatic		F02 1-10V+CLO	M2 Class II	
D22 Type III - B	730 Ra70 3000 K	L035 3500 lm			F06 DALI+CLO		
D25 Type III - C	740 Ra70 4000 K	L045 4500 lm			F10 D4i+ZHAGA		
D37 Type III - Asymmetric		L060 6000 lm			F04 Ampdim+CLO		
D24 Type IV - Forward throw		L070 7000 lm			F14 NVL6H+CLO		
D38 Type IV - C		L075 7500 lm					
D30 Type V - Rotosymmetric		L090 9000 lm					

Generated code: **RNC21 - N** - _____

RNC21 | Refitting kit | Kit in aluminium

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

ELECTRICAL CHARACTERISTICS

Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778.
ENEC safety mark.

MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminium (UNI EN 1706) with an integrated heat sink and extra-clear or prismatic toughened glass protective screen with IK09 impact resistance (EN 62262).

Polycarbonate frame for mounting the kit to the plate and provision for auxiliary devices compliant with Zhaga Book 18.
Components in PA6 polyamide and stainless steel screws.

INSTALLATION

The refitting module is designed for fastening on a flat plate with thickness 1.5 mm.

For installation on third-party lanterns, please contact the company.

WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.


Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.

RNC21 | Refitting kit | Kit in aluminium


Type I - Center road

Transparent

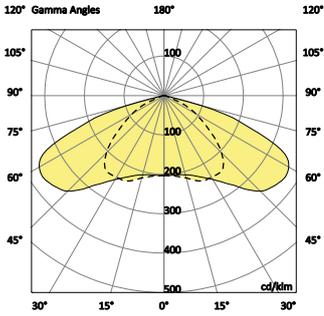


Type I - Center road

Prismatic

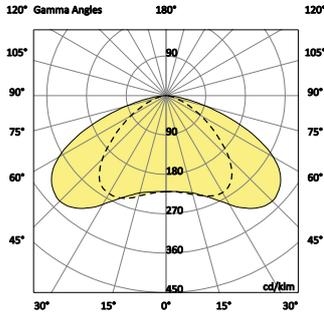


Type II - Asymmetric

Transparent

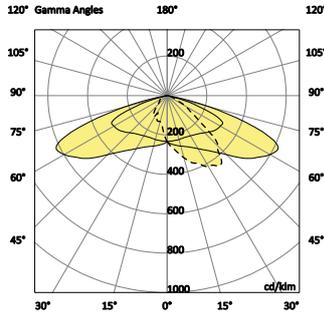


Type II - Asymmetric

Prismatic

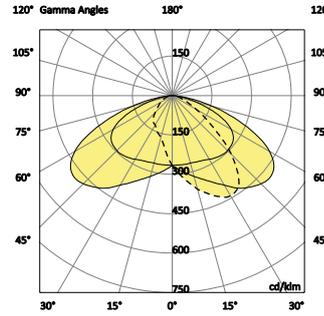


Type III - B

Transparent

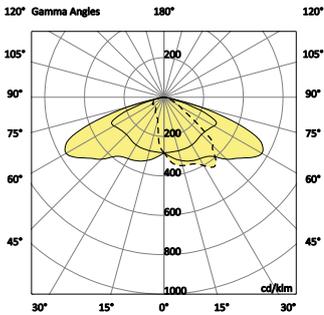


Type III - B

Prismatic

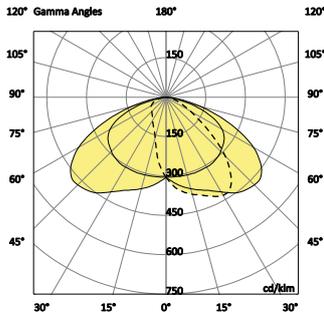


Type III - C

Transparent

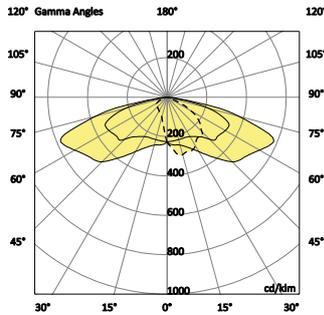


Type III - C

Prismatic

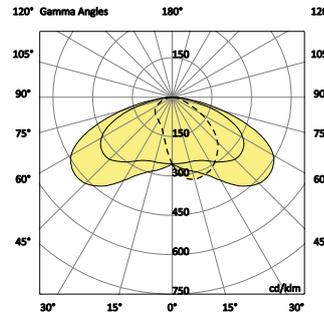


Type III - Asymmetric

Transparent

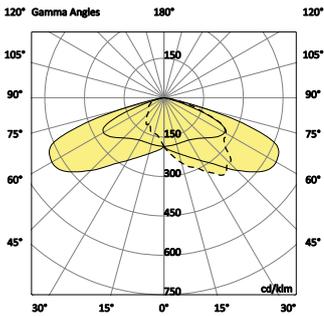


Type III - Asymmetric

Prismatic

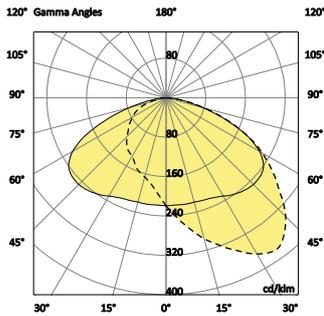


Type IV - Forward throw

Transparent

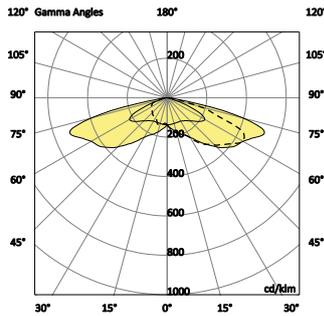


Type IV - Forward throw

Prismatic

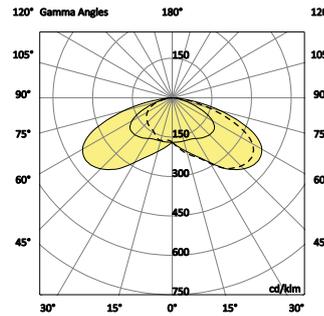


Type IV - C

Transparent

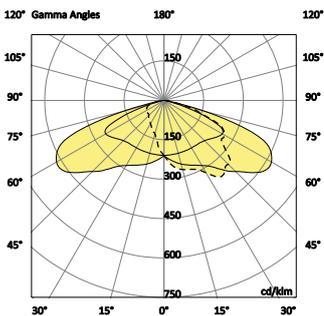


Type IV - C

Prismatic

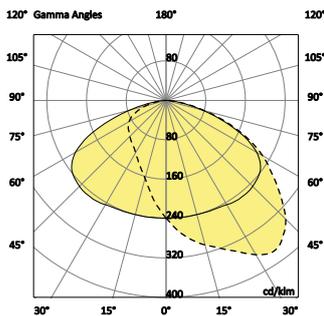


Type V - Rotosymmetric

Transparent

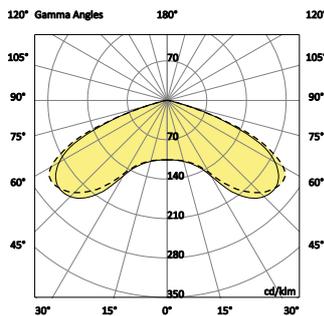

Type V - Rotosymmetric

Prismatic

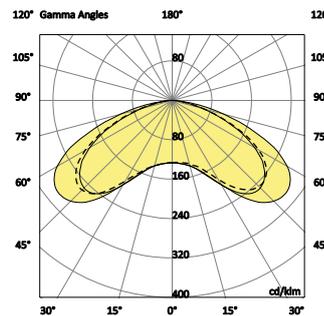

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
2500 lm	2700 K	16.9	148	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	2700 K	16.9	148	16	Type I - Center road	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type III - B	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type III - C	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	2700 K	16.9	148	16	Type IV - C	Transparent	1	0	1
2500 lm	2700 K	17.8	140	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	2700 K	17.8	140	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	2700 K	17.8	140	16	Type I - Center road	Prismatic	1	0	1
2500 lm	2700 K	17.8	140	16	Type III - B	Prismatic	1	0	1
2500 lm	2700 K	17.8	140	16	Type III - C	Prismatic	1	0	1
2500 lm	2700 K	17.8	140	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	2700 K	17.8	140	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	2700 K	17.8	140	16	Type IV - C	Prismatic	1	0	1
2500 lm	2700 K	17.4	144	16	Type I - Center road	Prismatic	1	0	1
2500 lm	3000 K	16.2	154	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	3000 K	16.2	154	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	3000 K	16.2	154	16	Type I - Center road	Transparent	1	0	1
2500 lm	3000 K	16.2	154	16	Type III - B	Transparent	1	0	1
2500 lm	3000 K	16.2	154	16	Type III - C	Transparent	1	0	1
2500 lm	3000 K	16.2	154	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	16.2	154	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	16.2	154	16	Type IV - C	Transparent	1	0	1
2500 lm	3000 K	17.2	145	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type I - Center road	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - B	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - C	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	3000 K	17.2	145	16	Type IV - C	Prismatic	1	0	1
2500 lm	3000 K	15.9	157	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	3000 K	15.9	157	16	Type IV - C	Transparent	1	0	1
2500 lm	3000 K	17	147	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	3000 K	17	147	16	Type III - C	Prismatic	1	0	1
2500 lm	4000 K	15.6	160	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	4000 K	15.6	160	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	4000 K	15.6	160	16	Type I - Center road	Transparent	1	0	1
2500 lm	4000 K	15.6	160	16	Type III - B	Transparent	1	0	1
2500 lm	4000 K	15.6	160	16	Type III - C	Transparent	1	0	1
2500 lm	4000 K	15.6	160	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	15.6	160	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	4000 K	15.6	160	16	Type IV - C	Transparent	1	0	1
2500 lm	4000 K	16.5	152	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	4000 K	16.5	152	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.5	152	16	Type I - Center road	Prismatic	1	0	1
2500 lm	4000 K	16.5	152	16	Type III - B	Prismatic	1	0	1
2500 lm	4000 K	16.5	152	16	Type III - C	Prismatic	1	0	1
2500 lm	4000 K	16.5	152	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.5	152	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	4000 K	16.5	152	16	Type IV - C	Prismatic	1	0	1
2500 lm	2200 K	18.8	133	16	Type IV - Forward throw	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	Type V - Rotosymmetric	Transparent	1	0	0

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
2500 lm	2200 K	18.8	133	16	Type I - Center road	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	Type III - B	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	Type III - C	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	2200 K	18.8	133	16	Type IV - C	Transparent	1	0	1
2500 lm	2200 K	18	139	16	Type V - Rotosymmetric	Transparent	1	0	0
2500 lm	2200 K	18	139	16	Type II - Asymmetric	Transparent	1	0	1
2500 lm	2200 K	18	139	16	Type III - Asymmetric	Transparent	1	0	1
2500 lm	2200 K	19.9	126	16	Type IV - Forward throw	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type V - Rotosymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type I - Center road	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - B	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - C	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type II - Asymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type III - Asymmetric	Prismatic	1	0	1
2500 lm	2200 K	19.9	126	16	Type IV - C	Prismatic	1	0	1
4500 lm	2700 K	30.3	149	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2700 K	30.3	149	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2700 K	30.3	149	16	Type I - Center road	Transparent	2	0	1
4500 lm	2700 K	30.3	149	16	Type III - B	Transparent	1	0	1
4500 lm	2700 K	30.3	149	16	Type III - C	Transparent	1	0	1
4500 lm	2700 K	30.3	149	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	30.3	149	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	30.3	149	16	Type IV - C	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2700 K	31.3	144	16	Type I - Center road	Transparent	2	0	1
4500 lm	2700 K	31.3	144	16	Type III - B	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type III - C	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2700 K	31.3	144	16	Type IV - C	Transparent	1	0	1
4500 lm	2700 K	33.3	135	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	2700 K	33.3	135	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	2700 K	33.3	135	16	Type I - Center road	Prismatic	2	0	1
4500 lm	2700 K	33.3	135	16	Type III - B	Prismatic	1	0	1
4500 lm	2700 K	33.3	135	16	Type III - C	Prismatic	1	0	1
4500 lm	2700 K	33.3	135	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	2700 K	33.3	135	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	2700 K	33.3	135	16	Type IV - C	Prismatic	1	0	1
4500 lm	2700 K	32.4	139	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	2700 K	32.4	139	16	Type III - C	Prismatic	1	0	1
4500 lm	3000 K	30	150	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	3000 K	30	150	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	3000 K	30	150	16	Type I - Center road	Transparent	2	0	1
4500 lm	3000 K	30	150	16	Type III - B	Transparent	1	0	1
4500 lm	3000 K	30	150	16	Type III - C	Transparent	1	0	1
4500 lm	3000 K	30	150	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	30	150	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	30	150	16	Type IV - C	Transparent	1	0	1
4500 lm	3000 K	31.9	141	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	3000 K	31.9	141	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	3000 K	31.9	141	16	Type I - Center road	Prismatic	2	0	1
4500 lm	3000 K	31.9	141	16	Type III - B	Prismatic	1	0	1

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
4500 lm	3000 K	31.9	141	16	Type III - C	Prismatic	1	0	1
4500 lm	3000 K	31.9	141	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	3000 K	31.9	141	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	3000 K	31.9	141	16	Type IV - C	Prismatic	1	0	1
4500 lm	3000 K	29.5	153	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	3000 K	29.5	153	16	Type III - C	Transparent	1	0	1
4500 lm	3000 K	29.5	153	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	3000 K	29.5	153	16	Type IV - C	Transparent	1	0	1
4500 lm	3000 K	31.4	143	16	Type III - C	Prismatic	1	0	1
4500 lm	4000 K	28.9	156	16	Type IV - Forward throw	Transparent	1	0	1
4500 lm	4000 K	28.9	156	16	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	4000 K	28.9	156	16	Type I - Center road	Transparent	2	0	1
4500 lm	4000 K	28.9	156	16	Type III - B	Transparent	1	0	1
4500 lm	4000 K	28.9	156	16	Type III - C	Transparent	1	0	1
4500 lm	4000 K	28.9	156	16	Type II - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	28.9	156	16	Type III - Asymmetric	Transparent	1	0	1
4500 lm	4000 K	28.9	156	16	Type IV - C	Transparent	1	0	1
4500 lm	4000 K	30.6	147	16	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	4000 K	30.6	147	16	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	4000 K	30.6	147	16	Type I - Center road	Prismatic	2	0	1
4500 lm	4000 K	30.6	147	16	Type III - B	Prismatic	1	0	1
4500 lm	4000 K	30.6	147	16	Type III - C	Prismatic	1	0	1
4500 lm	4000 K	30.6	147	16	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	4000 K	30.6	147	16	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	4000 K	30.6	147	16	Type IV - C	Prismatic	1	0	1
4500 lm	2200 K	33.3	135	24	Type IV - Forward throw	Transparent	1	0	1
4500 lm	2200 K	33.3	135	24	Type V - Rotosymmetric	Transparent	2	0	1
4500 lm	2200 K	33.3	135	24	Type I - Center road	Transparent	2	0	1
4500 lm	2200 K	33.3	135	24	Type III - B	Transparent	1	0	1
4500 lm	2200 K	33.3	135	24	Type III - C	Transparent	1	0	1
4500 lm	2200 K	33.3	135	24	Type II - Asymmetric	Transparent	1	0	1
4500 lm	2200 K	33.3	135	24	Type III - Asymmetric	Transparent	1	0	1
4500 lm	2200 K	33.3	135	24	Type IV - C	Transparent	1	0	1
4500 lm	2200 K	35.4	127	24	Type IV - Forward throw	Prismatic	1	0	1
4500 lm	2200 K	35.4	127	24	Type V - Rotosymmetric	Prismatic	2	0	1
4500 lm	2200 K	35.4	127	24	Type I - Center road	Prismatic	2	0	1
4500 lm	2200 K	35.4	127	24	Type III - B	Prismatic	1	0	1
4500 lm	2200 K	35.4	127	24	Type III - C	Prismatic	1	0	1
4500 lm	2200 K	35.4	127	24	Type II - Asymmetric	Prismatic	1	0	1
4500 lm	2200 K	35.4	127	24	Type III - Asymmetric	Prismatic	1	0	1
4500 lm	2200 K	35.4	127	24	Type IV - C	Prismatic	1	0	1
7500 lm	3000 K	50.4	149	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	3000 K	50.4	149	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	3000 K	50.4	149	24	Type I - Center road	Transparent	2	0	2
7500 lm	3000 K	50.4	149	24	Type III - B	Transparent	2	0	1
7500 lm	3000 K	50.4	149	24	Type III - C	Transparent	2	0	2
7500 lm	3000 K	50.4	149	24	Type II - Asymmetric	Transparent	1	0	1
7500 lm	3000 K	50.4	149	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	3000 K	50.4	149	24	Type IV - C	Transparent	1	0	1
7500 lm	3000 K	49.5	152	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	3000 K	49.5	152	24	Type I - Center road	Transparent	2	0	2
7500 lm	3000 K	49.5	152	24	Type III - C	Transparent	2	0	2
7500 lm	4000 K	48.1	156	24	Type IV - Forward throw	Transparent	2	0	2
7500 lm	4000 K	48.1	156	24	Type V - Rotosymmetric	Transparent	3	0	1
7500 lm	4000 K	48.1	156	24	Type I - Center road	Transparent	2	0	2

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7500 lm	4000 K	48.1	156	24	Type III - B	Transparent	2	0	1
7500 lm	4000 K	48.1	156	24	Type III - C	Transparent	2	0	2
7500 lm	4000 K	48.1	156	24	Type II - Asymmetric	Transparent	1	0	1
7500 lm	4000 K	48.1	156	24	Type III - Asymmetric	Transparent	1	0	2
7500 lm	4000 K	48.1	156	24	Type IV - C	Transparent	1	0	1
7500 lm	4000 K	47.3	159	24	Type IV - C	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	2700 K	40.2	149	24	Type I - Center road	Transparent	2	0	2
6000 lm	2700 K	40.2	149	24	Type III - B	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type III - C	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	2700 K	40.2	149	24	Type IV - C	Transparent	1	0	1
6000 lm	2700 K	39	154	24	Type III - C	Transparent	1	0	1
6000 lm	2700 K	44.2	136	24	Type IV - Forward throw	Prismatic	1	0	1
6000 lm	2700 K	44.2	136	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	2700 K	44.2	136	24	Type I - Center road	Prismatic	2	0	2
6000 lm	2700 K	44.2	136	24	Type III - B	Prismatic	1	0	1
6000 lm	2700 K	44.2	136	24	Type III - C	Prismatic	1	0	1
6000 lm	2700 K	44.2	136	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	2700 K	44.2	136	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	2700 K	44.2	136	24	Type IV - C	Prismatic	1	0	1
6000 lm	2700 K	43	140	24	Type III - C	Prismatic	1	0	1
6000 lm	2700 K	44.3	135	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	38.5	156	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	3000 K	38.5	156	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	3000 K	38.5	156	24	Type I - Center road	Transparent	2	0	2
6000 lm	3000 K	38.5	156	24	Type III - B	Transparent	1	0	1
6000 lm	3000 K	38.5	156	24	Type III - C	Transparent	1	0	1
6000 lm	3000 K	38.5	156	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	38.5	156	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	3000 K	38.5	156	24	Type IV - C	Transparent	1	0	1
6000 lm	3000 K	42.6	141	24	Type IV - Forward throw	Prismatic	1	0	1
6000 lm	3000 K	42.6	141	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	3000 K	42.6	141	24	Type I - Center road	Prismatic	2	0	2
6000 lm	3000 K	42.6	141	24	Type III - B	Prismatic	1	0	1
6000 lm	3000 K	42.6	141	24	Type III - C	Prismatic	1	0	1
6000 lm	3000 K	42.6	141	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	42.6	141	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	3000 K	42.6	141	24	Type IV - C	Prismatic	1	0	1
6000 lm	3000 K	37.9	158	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	3000 K	37.9	158	24	Type IV - C	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	4000 K	36.8	163	24	Type I - Center road	Transparent	2	0	2
6000 lm	4000 K	36.8	163	24	Type III - B	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type III - C	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	4000 K	36.8	163	24	Type IV - C	Transparent	1	0	1
6000 lm	4000 K	40.7	147	24	Type IV - Forward throw	Prismatic	1	0	1
6000 lm	4000 K	40.7	147	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	4000 K	40.7	147	24	Type I - Center road	Prismatic	2	0	2
6000 lm	4000 K	40.7	147	24	Type III - B	Prismatic	1	0	1

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
							1	0	1
6000 lm	4000 K	40.7	147	24	Type III - C	Prismatic	1	0	1
6000 lm	4000 K	40.7	147	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	4000 K	40.7	147	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	4000 K	40.7	147	24	Type IV - C	Prismatic	1	0	1
6000 lm	4000 K	36.1	166	24	Type III - C	Transparent	1	0	1
6000 lm	4000 K	36.1	166	24	Type IV - C	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type IV - Forward throw	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type V - Rotosymmetric	Transparent	2	0	1
6000 lm	2200 K	46.6	129	24	Type I - Center road	Transparent	2	0	2
6000 lm	2200 K	46.6	129	24	Type III - B	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type III - C	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type II - Asymmetric	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type III - Asymmetric	Transparent	1	0	1
6000 lm	2200 K	46.6	129	24	Type IV - C	Transparent	1	0	1
6000 lm	2200 K	44.7	134	24	Type III - C	Transparent	1	0	1
6000 lm	2200 K	49.7	121	24	Type IV - Forward throw	Prismatic	1	0	1
6000 lm	2200 K	49.7	121	24	Type V - Rotosymmetric	Prismatic	2	0	1
6000 lm	2200 K	49.7	121	24	Type I - Center road	Prismatic	2	0	2
6000 lm	2200 K	49.7	121	24	Type III - B	Prismatic	1	0	1
6000 lm	2200 K	49.7	121	24	Type III - C	Prismatic	1	0	1
6000 lm	2200 K	49.7	121	24	Type II - Asymmetric	Prismatic	1	0	1
6000 lm	2200 K	49.7	121	24	Type III - Asymmetric	Prismatic	1	0	1
6000 lm	2200 K	49.7	121	24	Type IV - C	Prismatic	1	0	1
1500 lm	2700 K	10.5	143	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	2700 K	10.5	143	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	2700 K	10.5	143	16	Type I - Center road	Transparent	1	0	1
1500 lm	2700 K	10.5	143	16	Type III - B	Transparent	0	0	0
1500 lm	2700 K	10.5	143	16	Type III - C	Transparent	1	0	1
1500 lm	2700 K	10.5	143	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	2700 K	10.5	143	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	2700 K	10.5	143	16	Type IV - C	Transparent	0	0	0
1500 lm	2700 K	11	136	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	2700 K	11	136	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	2700 K	11	136	16	Type I - Center road	Prismatic	1	0	1
1500 lm	2700 K	11	136	16	Type III - B	Prismatic	1	0	1
1500 lm	2700 K	11	136	16	Type III - C	Prismatic	1	0	1
1500 lm	2700 K	11	136	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	2700 K	11	136	16	Type III - Asymmetric	Prismatic	1	0	1
1500 lm	2700 K	11	136	16	Type IV - C	Prismatic	1	0	1
1500 lm	3000 K	10.1	149	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	3000 K	10.1	149	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	3000 K	10.1	149	16	Type I - Center road	Transparent	1	0	1
1500 lm	3000 K	10.1	149	16	Type III - B	Transparent	0	0	0
1500 lm	3000 K	10.1	149	16	Type III - C	Transparent	1	0	1
1500 lm	3000 K	10.1	149	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	3000 K	10.1	149	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	3000 K	10.1	149	16	Type IV - C	Transparent	0	0	0
1500 lm	3000 K	10.7	140	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	3000 K	10.7	140	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	3000 K	10.7	140	16	Type I - Center road	Prismatic	1	0	1
1500 lm	3000 K	10.7	140	16	Type III - B	Prismatic	1	0	1
1500 lm	3000 K	10.7	140	16	Type III - C	Prismatic	1	0	1
1500 lm	3000 K	10.7	140	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	3000 K	10.7	140	16	Type III - Asymmetric	Prismatic	1	0	1
1500 lm	3000 K	10.7	140	16	Type IV - C	Prismatic	1	0	1

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
1500 lm	3000 K	10.5	143	16	Type III - Asymmetric	Prismatic	1	0	1
1500 lm	4000 K	9.7	155	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	4000 K	9.7	155	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	4000 K	9.7	155	16	Type I - Center road	Transparent	1	0	1
1500 lm	4000 K	9.7	155	16	Type III - B	Transparent	0	0	0
1500 lm	4000 K	9.7	155	16	Type III - C	Transparent	1	0	1
1500 lm	4000 K	9.7	155	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	4000 K	9.7	155	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	4000 K	9.7	155	16	Type IV - C	Transparent	0	0	0
1500 lm	4000 K	10.2	147	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	4000 K	10.2	147	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	4000 K	10.2	147	16	Type I - Center road	Prismatic	1	0	1
1500 lm	4000 K	10.2	147	16	Type III - B	Prismatic	1	0	1
1500 lm	4000 K	10.2	147	16	Type III - C	Prismatic	1	0	1
1500 lm	4000 K	10.2	147	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	4000 K	10.2	147	16	Type III - Asymmetric	Prismatic	1	0	1
1500 lm	4000 K	10.2	147	16	Type IV - C	Prismatic	1	0	1
1500 lm	4000 K	9.6	156	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	2200 K	11.5	130	16	Type IV - Forward throw	Transparent	0	0	1
1500 lm	2200 K	11.5	130	16	Type V - Rotosymmetric	Transparent	1	0	0
1500 lm	2200 K	11.5	130	16	Type I - Center road	Transparent	1	0	1
1500 lm	2200 K	11.5	130	16	Type III - B	Transparent	0	0	0
1500 lm	2200 K	11.5	130	16	Type III - C	Transparent	1	0	1
1500 lm	2200 K	11.5	130	16	Type II - Asymmetric	Transparent	0	0	0
1500 lm	2200 K	11.5	130	16	Type III - Asymmetric	Transparent	0	0	0
1500 lm	2200 K	11.5	130	16	Type IV - C	Transparent	0	0	0
1500 lm	2200 K	12.2	123	16	Type IV - Forward throw	Prismatic	1	0	1
1500 lm	2200 K	12.2	123	16	Type V - Rotosymmetric	Prismatic	1	0	1
1500 lm	2200 K	12.2	123	16	Type I - Center road	Prismatic	1	0	1
1500 lm	2200 K	12.2	123	16	Type III - B	Prismatic	1	0	1
1500 lm	2200 K	12.2	123	16	Type III - C	Prismatic	1	0	1
1500 lm	2200 K	12.2	123	16	Type II - Asymmetric	Prismatic	1	0	1
1500 lm	2200 K	12.2	123	16	Type III - Asymmetric	Prismatic	1	0	1
1500 lm	2200 K	12.2	123	16	Type IV - C	Prismatic	1	0	1
3500 lm	2700 K	23.8	147	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	2700 K	23.8	147	16	Type I - Center road	Transparent	2	0	1
3500 lm	2700 K	23.8	147	16	Type III - B	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	Type III - C	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2700 K	23.8	147	16	Type IV - C	Transparent	1	0	1
3500 lm	2700 K	23	152	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2700 K	23	152	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	2700 K	25.8	136	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	2700 K	25.8	136	16	Type V - Rotosymmetric	Prismatic	2	0	1
3500 lm	2700 K	25.8	136	16	Type I - Center road	Prismatic	2	0	1
3500 lm	2700 K	25.8	136	16	Type III - B	Prismatic	1	0	1
3500 lm	2700 K	25.8	136	16	Type III - C	Prismatic	1	0	1
3500 lm	2700 K	25.8	136	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	2700 K	25.8	136	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	2700 K	25.8	136	16	Type IV - C	Prismatic	1	0	1
3500 lm	2700 K	25.2	139	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	2700 K	25.2	139	16	Type IV - C	Prismatic	1	0	1
3500 lm	3000 K	22.8	154	16	Type IV - Forward throw	Transparent	1	0	1

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
3500 lm	3000 K	22.8	154	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	3000 K	22.8	154	16	Type I - Center road	Transparent	2	0	1
3500 lm	3000 K	22.8	154	16	Type III - B	Transparent	1	0	1
3500 lm	3000 K	22.8	154	16	Type III - C	Transparent	1	0	1
3500 lm	3000 K	22.8	154	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	22.8	154	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	3000 K	22.8	154	16	Type IV - C	Transparent	1	0	1
3500 lm	3000 K	25	140	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	3000 K	25	140	16	Type V - Rotosymmetric	Prismatic	2	0	1
3500 lm	3000 K	25	140	16	Type I - Center road	Prismatic	2	0	1
3500 lm	3000 K	25	140	16	Type III - B	Prismatic	1	0	1
3500 lm	3000 K	25	140	16	Type III - C	Prismatic	1	0	1
3500 lm	3000 K	25	140	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	3000 K	25	140	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	3000 K	25	140	16	Type IV - C	Prismatic	1	0	1
3500 lm	3000 K	22.3	157	16	Type I - Center road	Transparent	2	0	1
3500 lm	3000 K	22.3	157	16	Type IV - C	Transparent	1	0	1
3500 lm	3000 K	24.6	142	16	Type III - C	Prismatic	1	0	1
3500 lm	3000 K	24.6	142	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	4000 K	21.8	161	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	4000 K	21.8	161	16	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	4000 K	21.8	161	16	Type I - Center road	Transparent	2	0	1
3500 lm	4000 K	21.8	161	16	Type III - B	Transparent	1	0	1
3500 lm	4000 K	21.8	161	16	Type III - C	Transparent	1	0	1
3500 lm	4000 K	21.8	161	16	Type II - Asymmetric	Transparent	1	0	1
3500 lm	4000 K	21.8	161	16	Type III - Asymmetric	Transparent	1	0	1
3500 lm	4000 K	21.8	161	16	Type IV - C	Transparent	1	0	1
3500 lm	4000 K	24	146	16	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	4000 K	24	146	16	Type V - Rotosymmetric	Prismatic	2	0	1
3500 lm	4000 K	24	146	16	Type I - Center road	Prismatic	2	0	1
3500 lm	4000 K	24	146	16	Type III - B	Prismatic	1	0	1
3500 lm	4000 K	24	146	16	Type III - C	Prismatic	1	0	1
3500 lm	4000 K	24	146	16	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	4000 K	24	146	16	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	4000 K	24	146	16	Type IV - C	Prismatic	1	0	1
3500 lm	4000 K	21.3	164	16	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2200 K	26.2	134	24	Type IV - Forward throw	Transparent	1	0	1
3500 lm	2200 K	26.2	134	24	Type V - Rotosymmetric	Transparent	2	0	0
3500 lm	2200 K	26.2	134	24	Type I - Center road	Transparent	2	0	1
3500 lm	2200 K	26.2	134	24	Type III - B	Transparent	1	0	1
3500 lm	2200 K	26.2	134	24	Type III - C	Transparent	1	0	1
3500 lm	2200 K	26.2	134	24	Type II - Asymmetric	Transparent	1	0	1
3500 lm	2200 K	26.2	134	24	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2200 K	26.2	134	24	Type IV - C	Transparent	1	0	1
3500 lm	2200 K	25.2	139	24	Type III - Asymmetric	Transparent	1	0	1
3500 lm	2200 K	27.6	127	24	Type IV - Forward throw	Prismatic	1	0	1
3500 lm	2200 K	27.6	127	24	Type V - Rotosymmetric	Prismatic	2	0	1
3500 lm	2200 K	27.6	127	24	Type I - Center road	Prismatic	2	0	1
3500 lm	2200 K	27.6	127	24	Type III - B	Prismatic	1	0	1
3500 lm	2200 K	27.6	127	24	Type III - C	Prismatic	1	0	1
3500 lm	2200 K	27.6	127	24	Type II - Asymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.6	127	24	Type III - Asymmetric	Prismatic	1	0	1
3500 lm	2200 K	27.6	127	24	Type IV - C	Prismatic	1	0	1
7000 lm	2700 K	48.8	143	24	Type IV - Forward throw	Transparent	1	0	2
7000 lm	2700 K	48.8	143	24	Type V - Rotosymmetric	Transparent	3	0	1

RNC21 | Refitting kit | Kit in aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7000 lm	2700 K	48.8	143	24	Type I - Center road	Transparent	2	0	2
7000 lm	2700 K	48.8	143	24	Type III - B	Transparent	1	0	1
7000 lm	2700 K	48.8	143	24	Type III - C	Transparent	2	0	2
7000 lm	2700 K	48.8	143	24	Type II - Asymmetric	Transparent	1	0	1
7000 lm	2700 K	48.8	143	24	Type III - Asymmetric	Transparent	1	0	1
7000 lm	2700 K	48.8	143	24	Type IV - C	Transparent	1	0	1
9000 lm	2700 K	57.4	157	24	Type IV - Forward throw	Transparent	2	0	2
9000 lm	2700 K	57.4	157	24	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	2700 K	57.4	157	24	Type I - Center road	Transparent	3	0	2
9000 lm	2700 K	57.4	157	24	Type III - B	Transparent	2	0	1
9000 lm	2700 K	57.4	157	24	Type III - C	Transparent	2	0	2
9000 lm	2700 K	57.4	157	24	Type II - Asymmetric	Transparent	2	0	1
9000 lm	2700 K	57.4	157	24	Type III - Asymmetric	Transparent	2	0	2
9000 lm	2700 K	57.4	157	24	Type IV - C	Transparent	2	0	2
9000 lm	2700 K	61.4	147	24	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	2700 K	61.4	147	24	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	2700 K	61.4	147	24	Type I - Center road	Prismatic	3	0	2
9000 lm	2700 K	61.4	147	24	Type III - B	Prismatic	2	0	1
9000 lm	2700 K	61.4	147	24	Type III - C	Prismatic	2	0	2
9000 lm	2700 K	61.4	147	24	Type II - Asymmetric	Prismatic	2	0	1
9000 lm	2700 K	61.4	147	24	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	2700 K	61.4	147	24	Type IV - C	Prismatic	2	0	2
9000 lm	3000 K	55.9	161	24	Type IV - Forward throw	Transparent	2	0	2
9000 lm	3000 K	55.9	161	24	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	3000 K	55.9	161	24	Type I - Center road	Transparent	3	0	2
9000 lm	3000 K	55.9	161	24	Type III - B	Transparent	2	0	1
9000 lm	3000 K	55.9	161	24	Type III - C	Transparent	2	0	2
9000 lm	3000 K	55.9	161	24	Type II - Asymmetric	Transparent	2	0	1
9000 lm	3000 K	55.9	161	24	Type III - Asymmetric	Transparent	2	0	2
9000 lm	3000 K	55.9	161	24	Type IV - C	Transparent	2	0	2
9000 lm	3000 K	59.8	151	24	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	3000 K	59.8	151	24	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	3000 K	59.8	151	24	Type I - Center road	Prismatic	3	0	2
9000 lm	3000 K	59.8	151	24	Type III - B	Prismatic	2	0	1
9000 lm	3000 K	59.8	151	24	Type III - C	Prismatic	2	0	2
9000 lm	3000 K	59.8	151	24	Type II - Asymmetric	Prismatic	2	0	1
9000 lm	3000 K	59.8	151	24	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	3000 K	59.8	151	24	Type IV - C	Prismatic	2	0	2
9000 lm	4000 K	52.6	171	24	Type IV - Forward throw	Transparent	2	0	2
9000 lm	4000 K	52.6	171	24	Type V - Rotosymmetric	Transparent	3	0	1
9000 lm	4000 K	52.6	171	24	Type I - Center road	Transparent	3	0	2
9000 lm	4000 K	52.6	171	24	Type III - B	Transparent	2	0	1
9000 lm	4000 K	52.6	171	24	Type III - C	Transparent	2	0	2
9000 lm	4000 K	52.6	171	24	Type II - Asymmetric	Transparent	2	0	1
9000 lm	4000 K	52.6	171	24	Type III - Asymmetric	Transparent	2	0	2
9000 lm	4000 K	52.6	171	24	Type IV - C	Transparent	2	0	2
9000 lm	4000 K	56.3	160	24	Type IV - Forward throw	Prismatic	2	0	2
9000 lm	4000 K	56.3	160	24	Type V - Rotosymmetric	Prismatic	3	0	1
9000 lm	4000 K	56.3	160	24	Type I - Center road	Prismatic	3	0	2
9000 lm	4000 K	56.3	160	24	Type III - B	Prismatic	2	0	1
9000 lm	4000 K	56.3	160	24	Type III - C	Prismatic	2	0	2
9000 lm	4000 K	56.3	160	24	Type II - Asymmetric	Prismatic	2	0	1
9000 lm	4000 K	56.3	160	24	Type III - Asymmetric	Prismatic	2	0	2
9000 lm	4000 K	56.3	160	24	Type IV - C	Prismatic	2	0	2