


RNC26 | Refitting kit | Kit in steel and aluminium

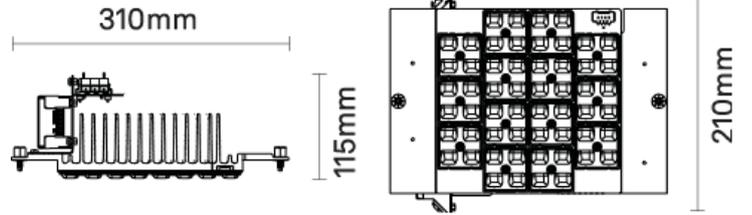

Ordering Information / Guide

Example: **RNC26-N-D20-730-L075-ST-V1-F02-M2-CW0**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D28 Type I - Center road	730 Ra70 3000 K	L075 7500 lm	ST Transparent	V1 220V-240V	F02 1-10V+CLO	M2 Class II	CW0 White [RAL 9010] Textured
D20 Type II - A	740 Ra70 4000 K	L090 9000 lm			F06 DALI+CLO		
D21 Type II - A		L105 10500 lm			F04 Ampdim+CLO		
D22 Type III - B		L120 12000 lm			F14 NVL6H+CLO		
D23 Cross walk DX							

Generated code: **RNC26 - N** - - - - -

RNC26 | Refitting kit | Kit in steel and aluminium

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤5

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

ELECTRICAL CHARACTERISTICS

Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778.

MECHANICAL CHARACTERISTICS

Extruded aluminium housing (UNI EN 1706) with LED module featuring an anodised aluminium heat sink and 2x2 modular refractive PMMA lenses. Wiring plate in galvanized steel, body supported by galvanized steel, and stainless steel and zinc-plated screws.

INSTALLATION

The refitting module is designed for fastening on the deck kit. Deck kits for Neri products can be ordered separately. For installation on third-party lanterns, please contact the company. The kit is designed to integrate a pre-existing luminaire and therefore inherits its IP rating and IK rating.


WARNINGS

Luminaire designed for disposal/recycling at end-of-life.
Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.

RNC26 | Refitting kit | Kit in steel and aluminium


Type I - Center road

Transparent

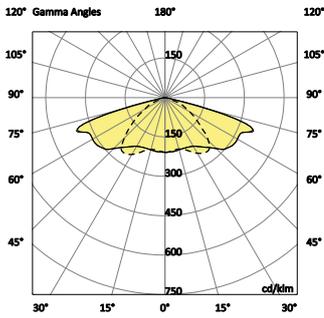


Type II - A

Transparent

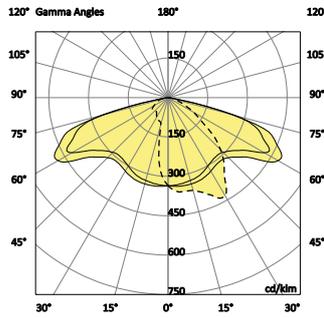


Type II - A

Transparent

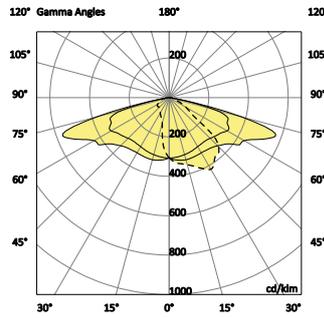


Type III - B

Transparent

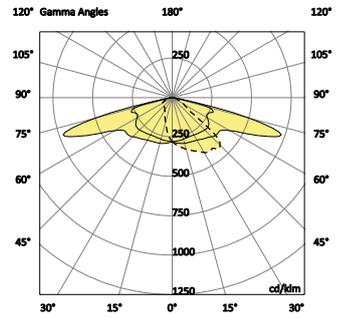

Cross walk DX

Transparent

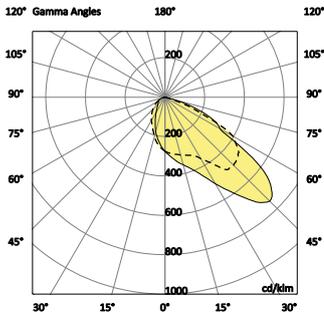

RNC26 | Refitting kit | Kit in steel and aluminium

Luminous Flux	Nominal CCT	W	lm/W	n° led	Optic	Screen	BUG		
7500 lm	3000 K	66	114	36	Type II - A	Transparent	2	0	2
7500 lm	3000 K	66	114	36	Type I - Center road	Transparent	2	0	2
7500 lm	3000 K	66	114	36	Type II - A	Transparent	2	0	2
7500 lm	3000 K	66	114	36	Type III - B	Transparent	2	0	2
7500 lm	3000 K	66	114	36	Cross walk DX	Transparent	2	0	1
9000 lm	3000 K	85	106	48	Type II - A	Transparent	2	0	2
9000 lm	3000 K	85	106	48	Type I - Center road	Transparent	3	0	3
9000 lm	3000 K	85	106	48	Type II - A	Transparent	2	0	2
9000 lm	3000 K	85	106	48	Type III - B	Transparent	2	0	2
9000 lm	3000 K	85	106	48	Cross walk DX	Transparent	2	0	2
9000 lm	4000 K	73	123	48	Type II - A	Transparent	2	0	2
9000 lm	4000 K	73	123	48	Type I - Center road	Transparent	3	0	3
9000 lm	4000 K	73	123	48	Type II - A	Transparent	2	0	2
9000 lm	4000 K	73	123	48	Type III - B	Transparent	2	0	2
9000 lm	4000 K	73	123	48	Cross walk DX	Transparent	2	0	2
10500 lm	3000 K	106	99	48	Type II - A	Transparent	2	0	2
10500 lm	3000 K	106	99	48	Type I - Center road	Transparent	3	0	3
10500 lm	3000 K	106	99	48	Type II - A	Transparent	2	0	2
10500 lm	3000 K	106	99	48	Type III - B	Transparent	2	0	2
10500 lm	3000 K	106	99	48	Cross walk DX	Transparent	2	0	2
10500 lm	4000 K	90	117	48	Type II - A	Transparent	2	0	2
10500 lm	4000 K	90	117	48	Type I - Center road	Transparent	3	0	3
10500 lm	4000 K	90	117	48	Type II - A	Transparent	2	0	2
10500 lm	4000 K	90	117	48	Type III - B	Transparent	2	0	2
10500 lm	4000 K	90	117	48	Cross walk DX	Transparent	2	0	2
12000 lm	4000 K	111	108	48	Type II - A	Transparent	2	0	2
12000 lm	4000 K	111	108	48	Type I - Center road	Transparent	3	0	3
12000 lm	4000 K	111	108	48	Type II - A	Transparent	2	0	2
12000 lm	4000 K	111	108	48	Type III - B	Transparent	2	0	2
12000 lm	4000 K	111	108	48	Cross walk DX	Transparent	3	0	2