


## Chara | Luminaire

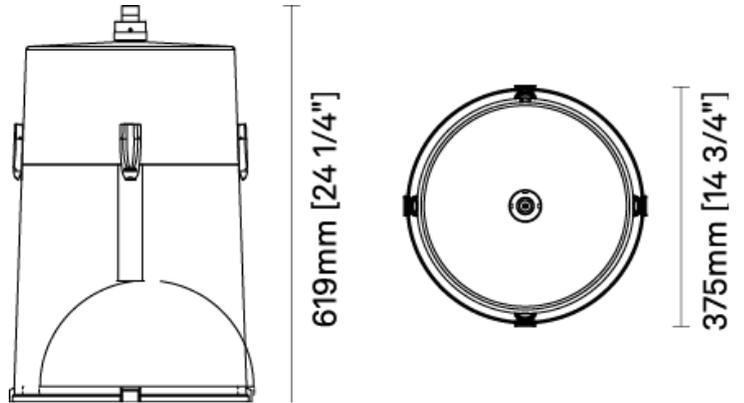

### Ordering Information / Guide

Example: **SN020-N-D20-730-L015-SP-V1-F14-M2-CN0**

| Optique                               | Ra+K                      | Luminous flux          | Screen finish          | Power supply           | Driver Function          | ISO Class             | Finish                             |
|---------------------------------------|---------------------------|------------------------|------------------------|------------------------|--------------------------|-----------------------|------------------------------------|
| <b>D28</b><br>Type I - Center road    | <b>730</b><br>Ra70 3000 K | <b>L015</b><br>1500 lm | <b>SP</b><br>Prismatic | <b>V1</b><br>220V-240V | <b>F02</b><br>1-10V+CLO  | <b>M2</b><br>Class II | <b>CN0</b><br>Grey [Neri] Textured |
| <b>D20</b><br>Type II - A             | <b>740</b><br>Ra70 4000 K | <b>L025</b><br>2500 lm |                        |                        | <b>F06</b><br>DALI+CLO   |                       |                                    |
| <b>D21</b><br>Type II - A             |                           | <b>L035</b><br>3500 lm |                        |                        | <b>F04</b><br>Ampdim+CLO |                       |                                    |
| <b>D24</b><br>Type IV - Forward throw |                           | <b>L045</b><br>4500 lm |                        |                        | <b>F14</b><br>NVL6H+CLO  |                       |                                    |
| <b>D30</b><br>Type V - Rotosymmetric  |                           | <b>L060</b><br>6000 lm |                        |                        |                          |                       |                                    |
|                                       |                           | <b>L075</b><br>7500 lm |                        |                        |                          |                       |                                    |

Generated code: **SN020 - N** - \_\_\_\_\_

## Chara | Luminaire

### SOURCE

High-power LED matrix.

**Standard Deviation Colour Matching** ≤5

### LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

### ELECTRICAL CHARACTERISTICS

Compliant with standards EN 60598-1; EN 60598-2-3; EN 62031; EN 55015 EMC; EN 61547 EMC; EN 61000-3-2/3; IEC/TR 62778.

### MECHANICAL CHARACTERISTICS

Die-cast aluminium housing (UNI EN 1706) with cylindrical top frame featuring a quick-connect brass fitting and G3/4" threaded tube for mounting to the support, complete with internal cable gland.

Cylindrical screen in polycarbonate with prismatic glass base and silicone sealing gasket.

Tilting inner frame in anodised aluminium sheet, openable via snap-in clips for access to the auxiliary compartment, with wiring plate, reflective semi-sphere, and connection tube.

Stainless steel screws.

### INSTALLATION

Suspended: threaded connection G3/4".

### WARNINGS

Luminaire designed for disposal/recycling at end-of-life.

Replaceable (LED only) light source by a professional.

Replaceable control gear by a professional.

Protection of surfaces: please refer to the specification on painting procedures of the materials.