



Kaus Bollard | Luminaire | Kaus Bollard 180°



CE IP65 IK07

Ordering Information / Guide

Example: **BOKAU00-N-D53-830-L002-ST-V1-F06-M1-CNO**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D53 180°	830 Ra80 3000 K	L002 224 lm	ST Transparent	V1 220V-240V	F06 DALI+CLO	M1 Class I	CNO Grey [Neri] Textured

Generated code: **BOKAU00 - N** - _ _ _ _ _

Kaus Bollard | Luminaire | Kaus Bollard 180°

Compact design engineered to ensure long-term durability and reliability.

SOURCE

LED 3030 MID-Power.

Energy-efficiency class	D
LED forward current	92 mA
Power rating	6.6 W
Nominal Flux	224 lm
Nominal CCT (Colour temperature)	3000 K
Color Rendering Index (Ra)	80
Standard Deviation Colour Matching	≤3
ANSI/IES TM-30	Rf = 84 Rg = 97

LIGHTING CHARACTERISTICS

Internal aluminum reflector.

LED quantity	24
---------------------	----

ELECTRICAL CHARACTERISTICS

Luminaire power	7.8 W
Power supply	220V-240V~ 50/60Hz
Insulation class	Class I

MECHANICAL CHARACTERISTICS

Extruded aluminum structure with integrated die-cast aluminum heat sink. Protective screen in transparent PMMA and high-resistance plastic components.

Weight	4.4 kg
---------------	--------


INSTALLATION

Installation via anchors fastening (not included).

Kaus Bollard | Luminaire | Kaus Bollard 180°

Optic: 180°

Screen finish: Transparent

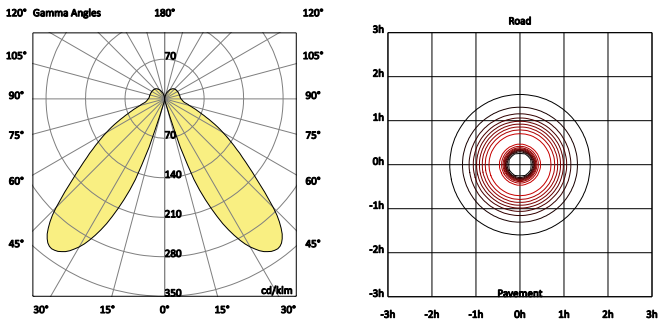

Kaus Bollard | Luminaire | Kaus Bollard 180°

Optic: 180°

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Road	Urban	Ped	Park	Art
224 lm	3000 K	7.8	29	24	92	6.6	34	G	G	G	G	F