



## Kaus Bollard | Luminaire | Kaus Bollard 360°



Ø 110 mm



800 mm

CE IP65 IK07 

Ordering Information / Guide

Example: **BOKAU01-N-D52-830-L003-ST-V1-F06-M1-CNO**

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D52 360°	830 Ra80 3000 K	L003 258 lm	ST Transparent	V1 220V-240V	F06 DALI+CLO	M1 Class I	CNO Grey [Neri] Textured

Generated code: **BOKAU01 - N** - \_\_\_\_\_

## Kaus Bollard | Luminaire | Kaus Bollard 360°

Compact design engineered to ensure long-term durability and reliability.

### SOURCE

LED 3030 MID-Power.	
<b>Energy-efficiency class</b>	D
<b>LED forward current</b>	89 mA
<b>Power rating</b>	6.4 W
<b>Nominal Flux</b>	276 lm
<b>Nominal CCT (Colour temperature)</b>	3000 K
<b>Color Rendering Index (Ra)</b>	80
<b>Standard Deviation Colour Matching</b>	≤3
<b>ANSI/IES TM-30</b>	Rf = 84 Rg = 97

### LIGHTING CHARACTERISTICS

Internal aluminum reflector.	
<b>LED quantity</b>	24

### ELECTRICAL CHARACTERISTICS

<b>Luminaire power</b>	7.5 W
<b>Power supply</b>	220V-240V~ 50/60Hz
<b>Insulation class</b>	Class I

### MECHANICAL CHARACTERISTICS

Extruded aluminum structure with integrated die-cast aluminum heat sink. Protective screen in transparent PMMA and high-resistance plastic components.

<b>Weight</b>	4.4 kg
---------------	--------


### INSTALLATION

Installation via anchors fastening (not included).

## Kaus Bollard | Luminaire | Kaus Bollard 360°

Optic: 360°

Screen finish: Transparent

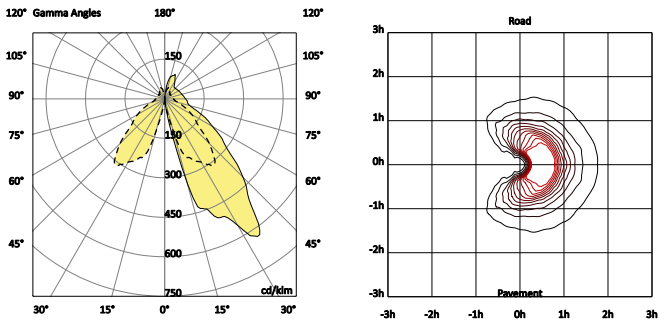

## Kaus Bollard | Luminaire | Kaus Bollard 360°

Optic: 360°

Screen finish: Transparent

System					Source			IPEA				
Luminous Flux	Nominal CCT	W	lm/W	n° led	mA	W	lm/W	Road	Urban	Ped	Park	Art
276 lm	3000 K	7.5	37	24	89	6.4	43	F	F	G	G	F