


Project location: \_\_\_\_\_  
 Project name: \_\_\_\_\_

Fixture type: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

## Nebula Essential | Pole | 1 light source

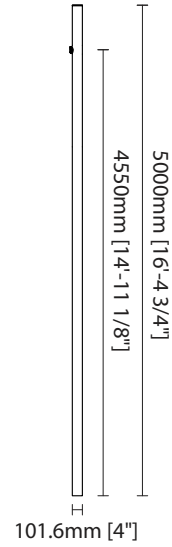

Ordering Information / Guide

Example: **PONEBEA-N-BF-EPF-GX1-HC0510-ZD102102-CNO**

Ground fixing	Shape	Top Set up / Light points	Height	Section	Finish
BF Flanged	EPF Cylindrical	GX1 Max 1 light source	<b>HC0510</b> 200.788 in	<b>ZD102102</b> Base 4.016 - Top 4.016 in	<b>CNO</b> Grey [Neri] Textured
			<b>HC0600</b> 236.221 in	<b>ZD152152</b> Base 5.984 - Top 5.984 in	
			<b>HC0690</b> 271.654 in		
			<b>HC0780</b> 307.087 in		

Generated code: **PONEBEA - N** - \_ \_ \_ \_ \_ - \_ \_ \_ \_ \_ - \_ \_ \_ \_ \_ - \_ \_ \_ \_ \_

### CONFIGURATION NOTES

The product features shown in this datasheet cannot always be freely combined.  
 To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

## Nebula Essential | Pole | 1 light source

### MECHANICAL CHARACTERISTICS

Pole in steel UNI EN 10219, hot-dip galvanized according to UNI EN ISO 1461.

**Weight** 105.6-244.05 lb