


Pixis Surface | Luminaire | Pixis Surface Projector

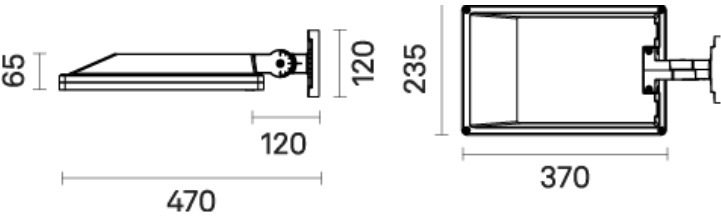

Ordering Information / Guide

Example: LUPIX12-N-D61-830-L040-ST-V1-F06-M2-CN0

Optique	Ra+K	Luminous flux	Screen finish	Power supply	Driver Function	ISO Class	Finish
D61 Spot	827 Ra80 2700 K	L040 4000 lm	ST Transparent	V1 220V-240V	F06 DALI+CLO	M2 Class II	CN0 Grey [Neri] Textured
D63 Medium wide flood	830 Ra80 3000 K	L060 6000 lm			F44 D4i+CASAMBI		
D64 Wide flood	840 Ra80 4000 K	L070 7000 lm			F50 NVLK + CLO		
D62 Flood	8T2 Ra80 TW 2200-4000 K						

Generated code: LUPIX12 - N - _ _ _ - _ _ _ _ - _ _ _ _ - _ _ _ _ - _ _ _ _

Pixis Surface | Luminaire | Pixis Surface Projector

SOURCE

High-power LED matrix.

Standard Deviation Colour Matching ≤ 3

LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

ELECTRICAL CHARACTERISTICS

ENEC safety mark.

MECHANICAL CHARACTERISTICS

Structure with a base and body made of die-cast aluminium (UNI EN 1706) and a lower frame openable for access to the auxiliary compartment. Protective screen in extra-clear tempered glass with IK10 impact resistance (EN 62262) and diffusing plastic adhesive film (code 9565.620.267). Integrated heat sink in die-cast aluminum, internal black reflector in PC, silicone gasket between lower frame and upper cover, and compartment prepared for additional surge protectors or remote control systems. Stainless steel screws.

INSTALLATION

Suitable for mounting on a flat surface with anchors.
Adjustable $\pm 90^\circ$ with 10° steps.

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.