

PROSPETTO - *ELEVATION* : **3004.005.300**


Rev. A - Gennaio - *January* 2006

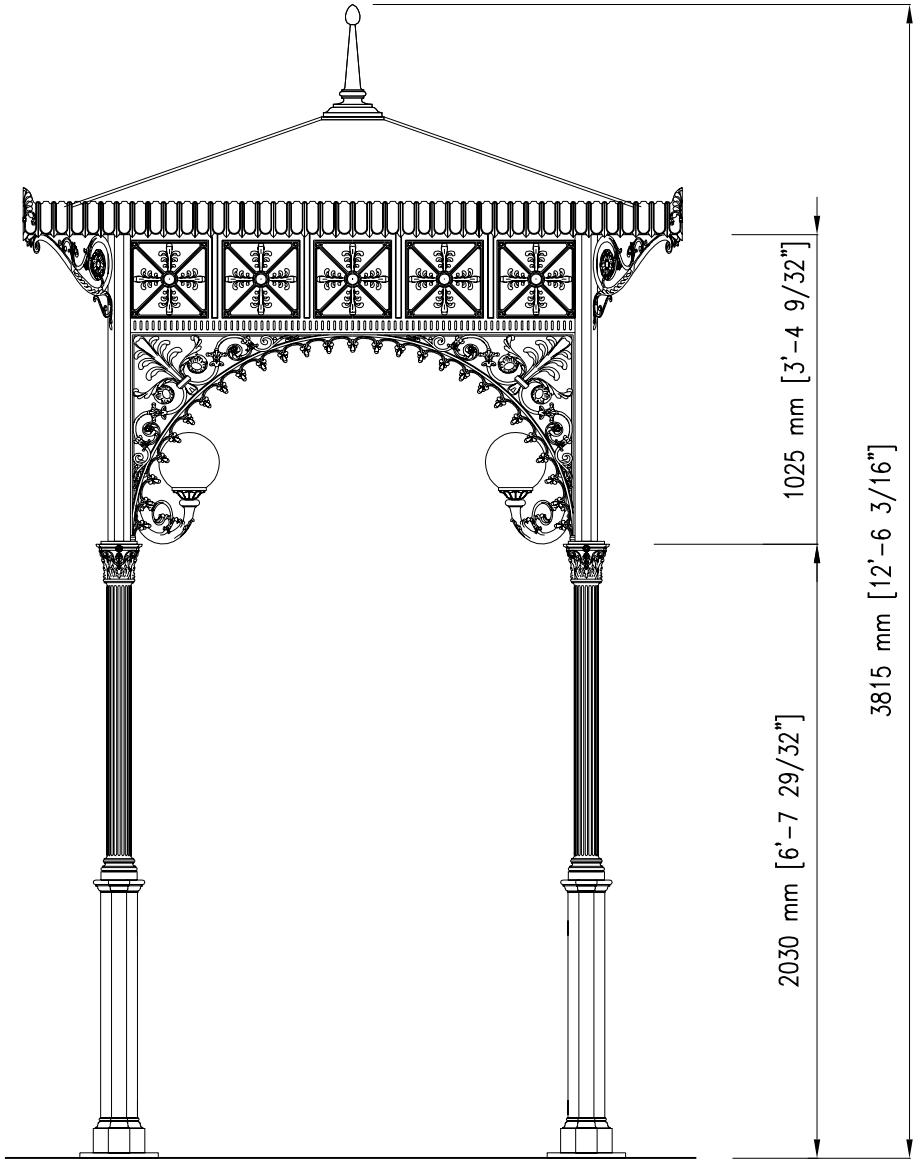

© 2006 NERI S.p.A.

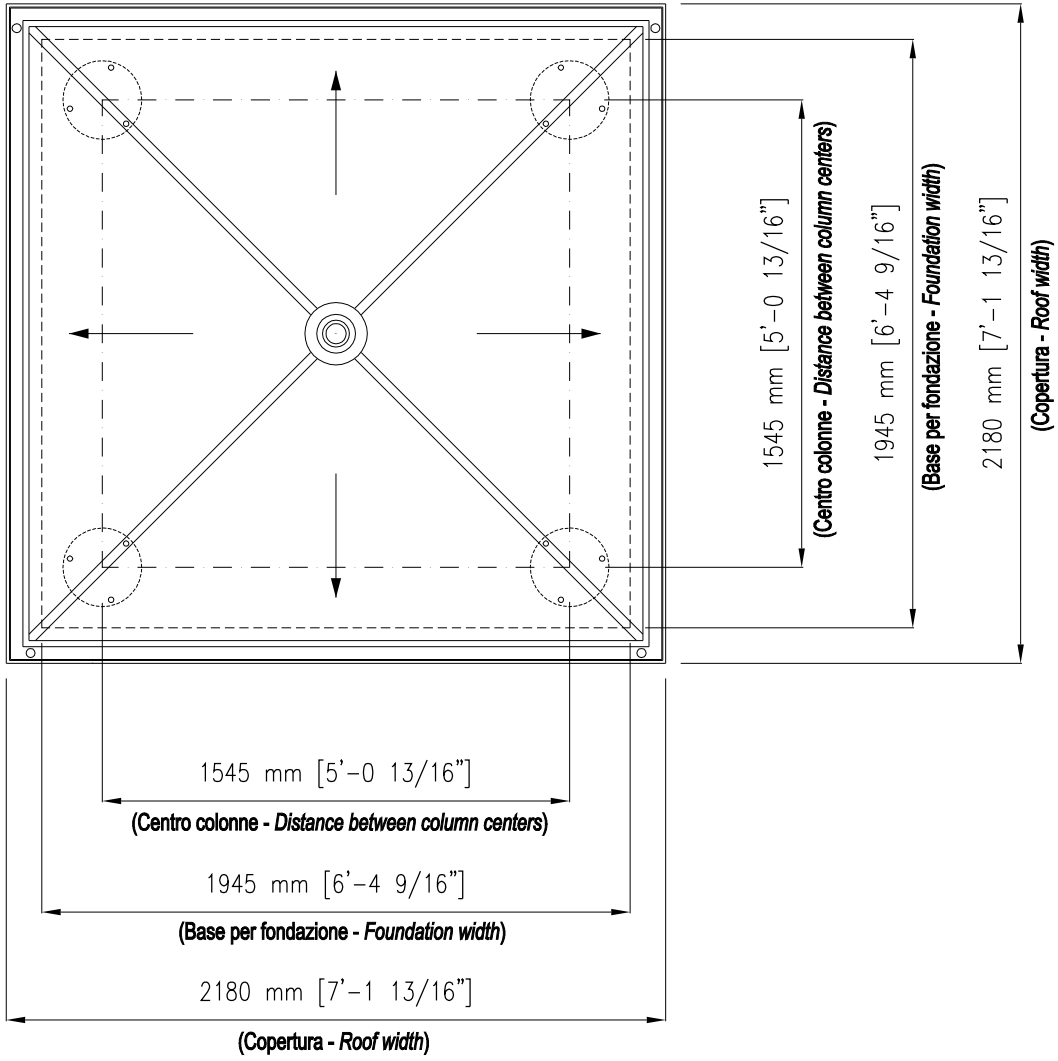

© 2006 NERI S.p.A.

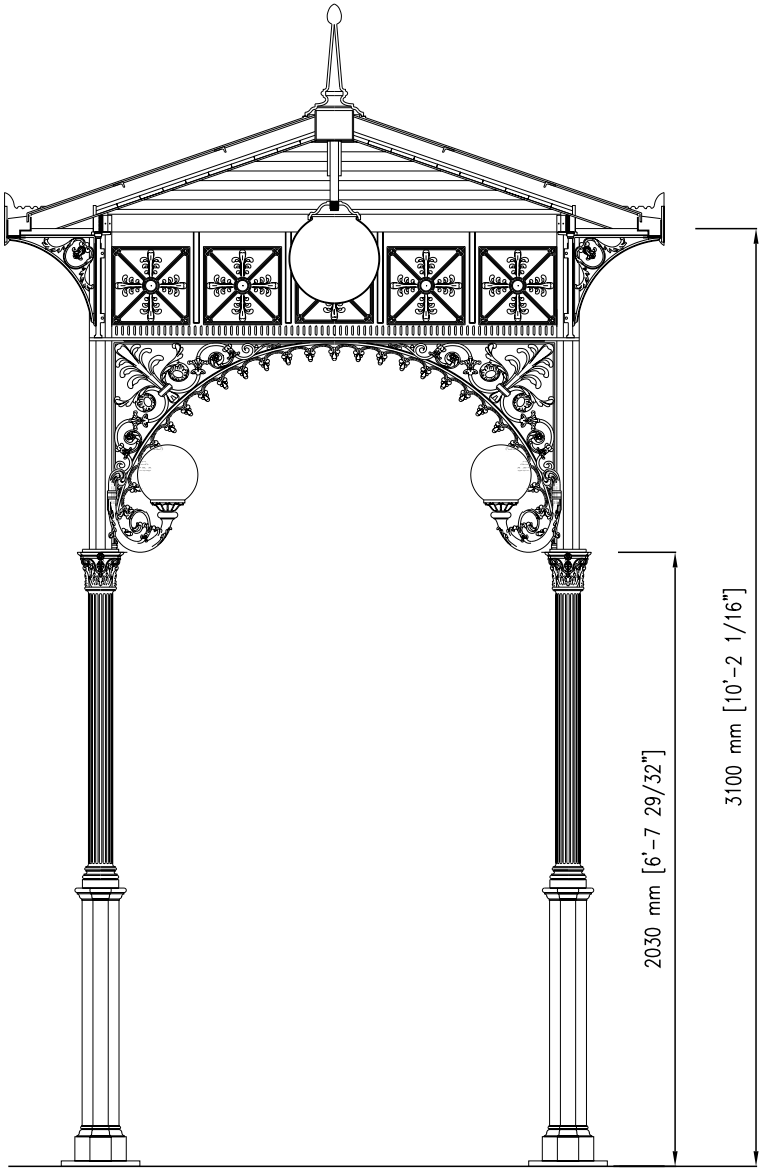

© 2006 NERI S.p.A.

ITEM: **3004.005.300**

TECHNICAL SPECIFICATION - Rev. A - January 2006

Description

This gazebo is primarily constructed from cast iron (UNI EN 1561), aluminum alloy (UNI EN 1706), and hot-dip galvanized S235J steel (UNI EN 10219-1) in accordance with UNI EN ISO 1461 standards. All components match the project drawings in shape, dimensions, and decorative detailing. The structure consists of the following elements:

1) Four cast iron columns, each 203 cm tall, arranged in a square with a 154.5 cm spacing between centers. The lower half of each column has an octagonal design with a base plinth, while the upper half is cylindrical with twenty fluted grooves, topped with a Corinthian-style capital. Each column features a flange (28.4 cm diameter) with three pre-drilled holes (2.0 cm diameter) for anchoring to the ground with anchor bolts;

2°) Four octagonal cast iron posts, each with a corner bracket (7.5 cm width, 107 cm height);

3°) Four single-piece cast iron panels, each featuring a lower arch adorned with leaf and lily motifs and, above, five sections divided into four parts, each section decorated with four symmetrically arranged leaves;

4°) A roof structure built with hot-dip galvanized steel beams supporting a copper-colored fiberglass top, plus an insulated wood slat interior ceiling. A galvanized steel sheet is fitted over the edge of the canopy. The canopy is reinforced by beams and cast iron brackets (A), with four brackets set between the panel sections (total of sixteen). The gutter is crafted from shaped galvanized steel, featuring copper spouts, a decorative front band (B), and corner palms (C) in cast aluminum;

5°) An aluminum finial, 40 cm tall, positioned at the peak of the roof;

6°) Four light fixtures made of cast aluminum brackets mounted on the posts (2°), each with a 20 cm diameter white opal PMMA globe and lamp holder.

The center of the gazebo features a lighting globe (35 cm diameter) in white opal PMMA, complete with a lamp holder.


The roof covers an area of 4.8 m_2, with a usable space of 2.4 m_2.

The standard colors are Neri gray, RAL 6005 green, or RAL 9010 white; other colors are available upon request.

For installation, a perfectly level masonry base is required. Electrical and plumbing systems, as well as flooring, are not included in the supply.

Surface Protection

Please refer to the detailed descriptions for the painting cycles of the gazebo's materials.

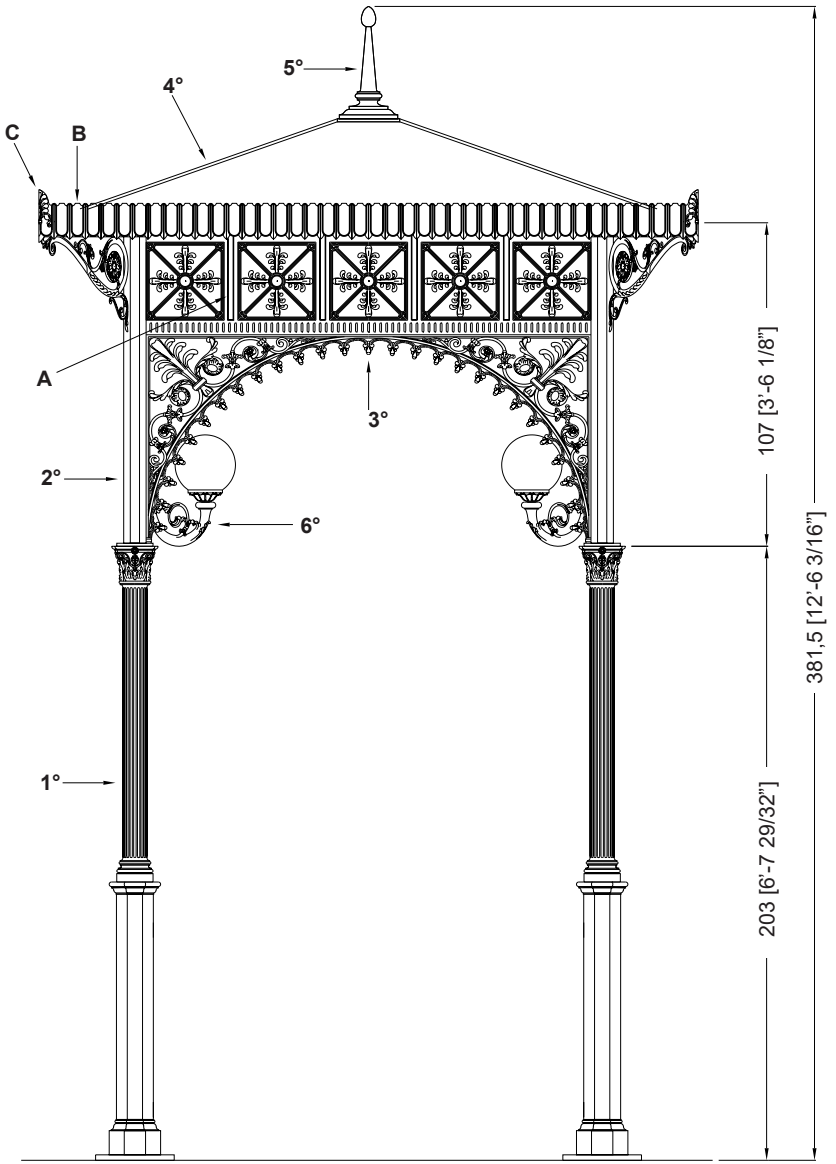

© 2006 NERI S.p.A.