
PROSPETTO - *ELEVATION* : **3063.001.300**

Rev. A - Gennaio - *January* 2006

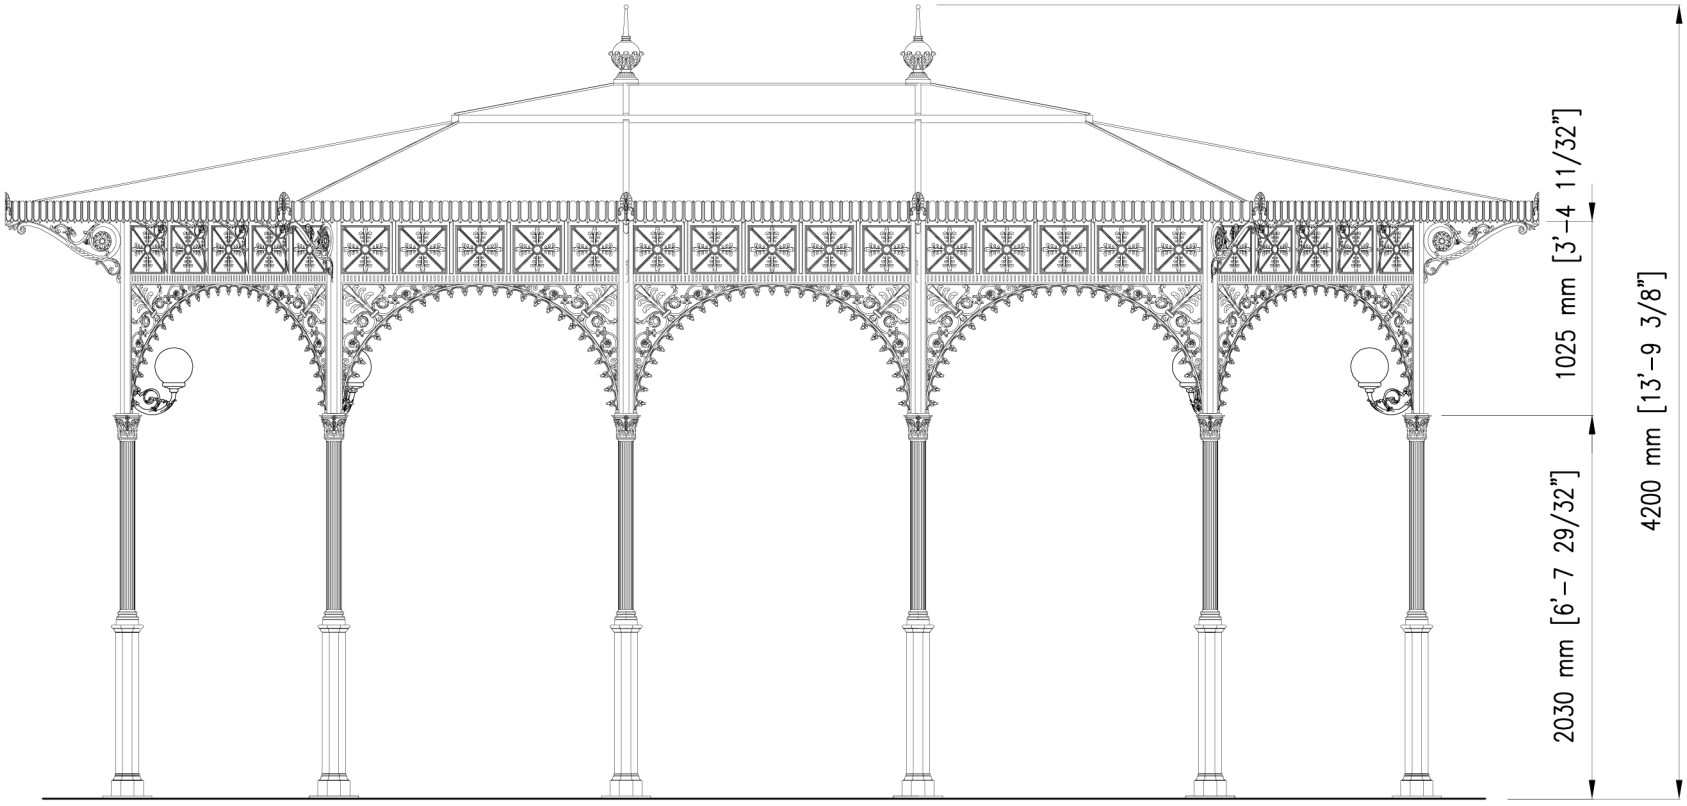


© 2006 NERI S.p.A.


cm 1:40

PIANTA - *PLAN* : **3063.001.300**

Rev. A - Gennaio - *January* 2006

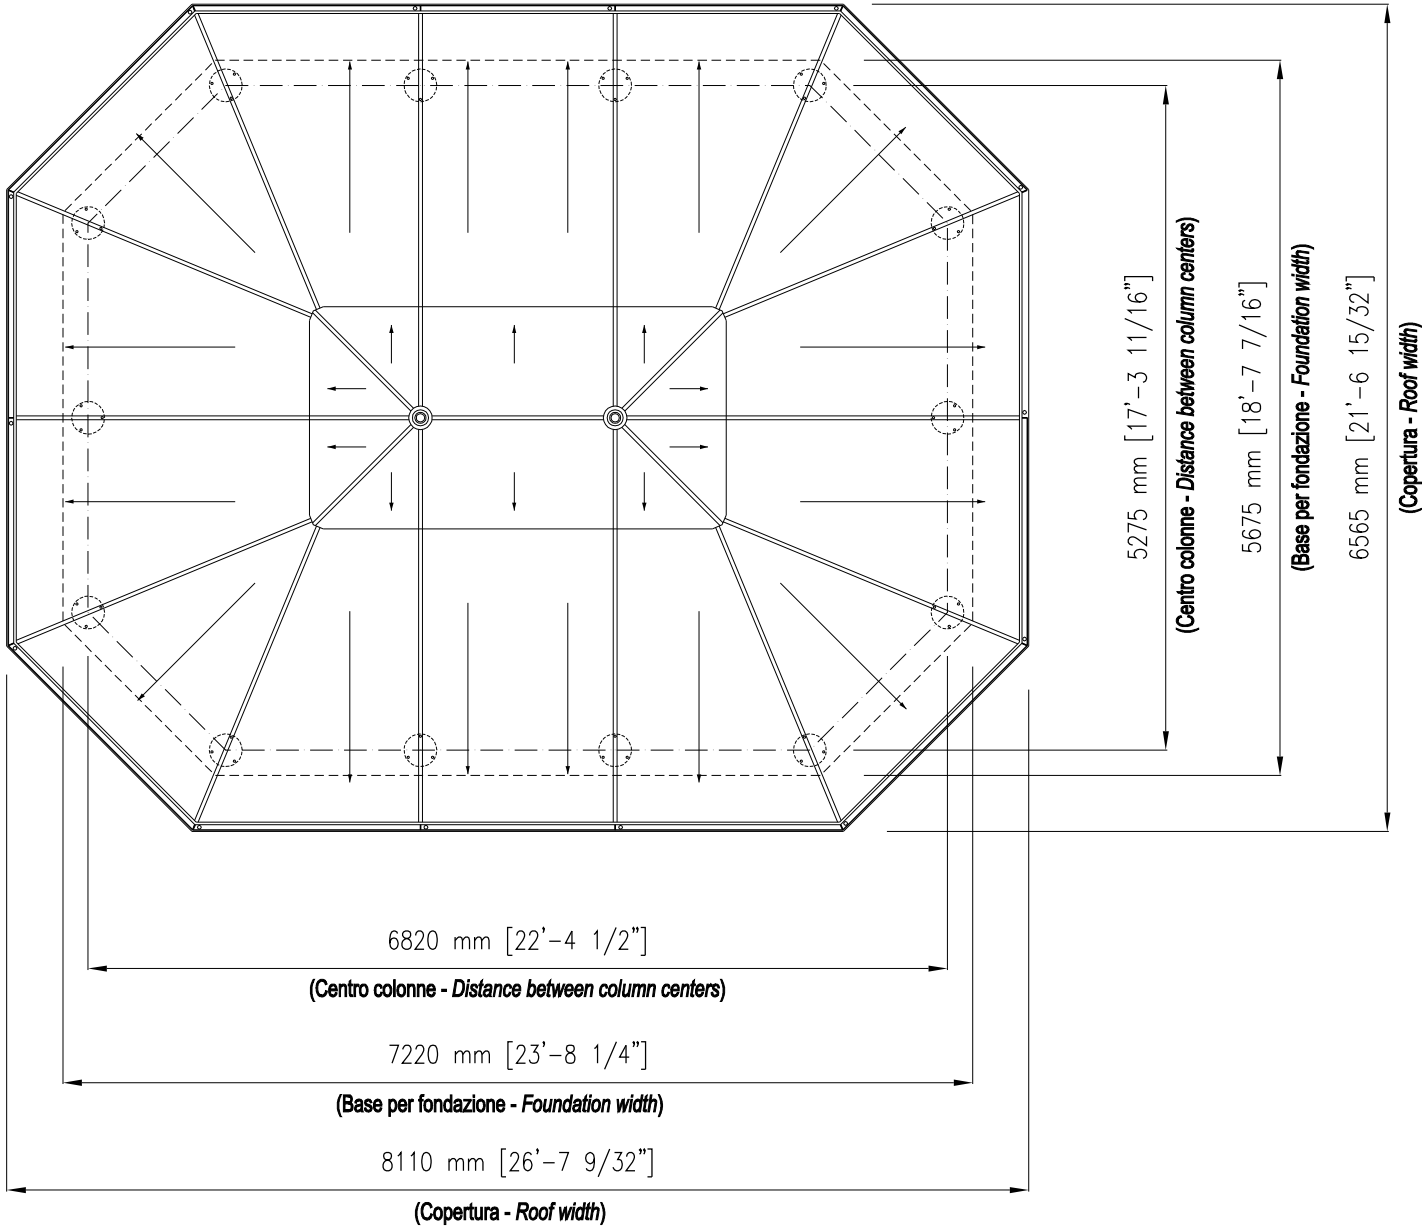

© 2006 NERI S.p.A.

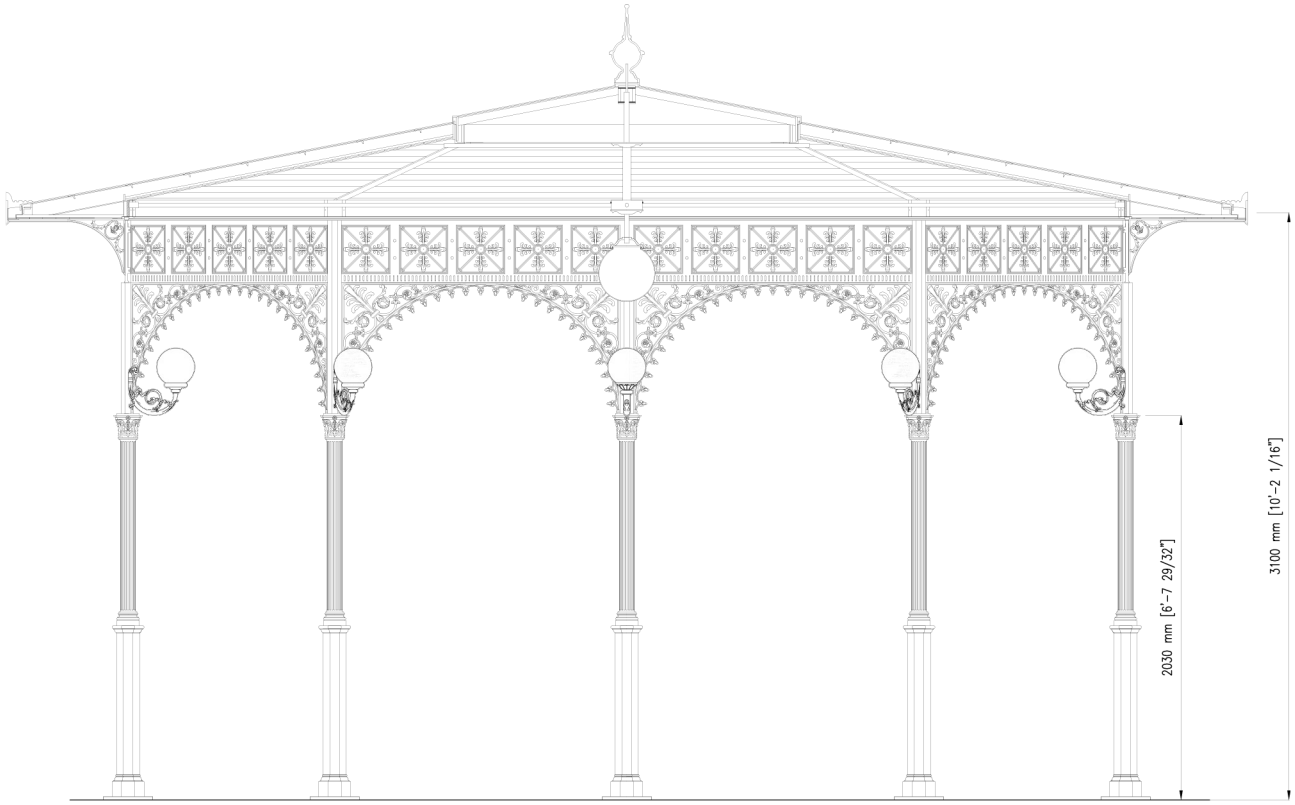

© 2006 NERI S.p.A.

Description

This gazebo is primarily constructed from cast iron elements compliant with UNI EN 1561, aluminum castings according to UNI EN 1706, and hot-dip galvanized S235J steel per UNI EN 10219-1 and UNI EN ISO 1461. All components conform in shape, size, and decorative details to the project design. The gazebo consists of the following:

1) Fourteen cast iron columns, each 203 cm tall, arranged in an octagon with a spacing of 154.5 cm. The lower half of each column is octagonal with a base plinth, while the upper half is cylindrical, adorned with twenty vertical grooves and finished with a Corinthian capital. Each column includes a flange (diameter 28.4 cm) with three pre-drilled holes (diameter 2.0 cm) for anchoring to the ground with bolts;

2°) Fourteen octagonal cast iron posts with corner brackets (width 7.5 cm, height 107 cm);

3°) Fourteen single-piece cast iron panels, each featuring a lower arch adorned with leaves and lilies and an upper section divided into five frames, each split into four parts and decorated with four symmetrically arranged leaves;

4°) A roof made from hot-dip galvanized steel beams supporting a copper-colored fiberglass cover, with an insulated wood panel ceiling that extends outward beneath the canopy. The canopy itself is held up by beams and cast iron brackets (A). Specifically, the brackets are positioned between the panel frames, with four per panel for a total of fifty-six brackets. The gutter is formed from specially shaped galvanized steel sheet with copper spouts, fronted by a decorative band (B) and corner palm motifs (C) in cast aluminum;

5°) Two cast aluminum finials shaped like spheres with pointed tops (44 cm high), decorated with leaves at the base and placed on top of the roof;

6°) Fourteen lighting fixtures consisting of cast aluminum brackets to be attached to the posts (2°), each fitted with an opal white PMMA globe (20 cm diameter) and lamp holder.

The center of the gazebo features two opal white PMMA globes (35 cm diameter), each complete with lamp holder.


The roof covers an area of 48.8 m_2, while the usable space is 33.5 m_2.

The standard color options are Neri gray, RAL 6005 green, or RAL 9010 white; other colors are available upon request.

To install, a perfectly level masonry foundation is required. Electrical, plumbing, and flooring are not included in the supply.

Surface Protection

Please refer to the detailed specifications for the paint cycles of the materials used in the gazebo.

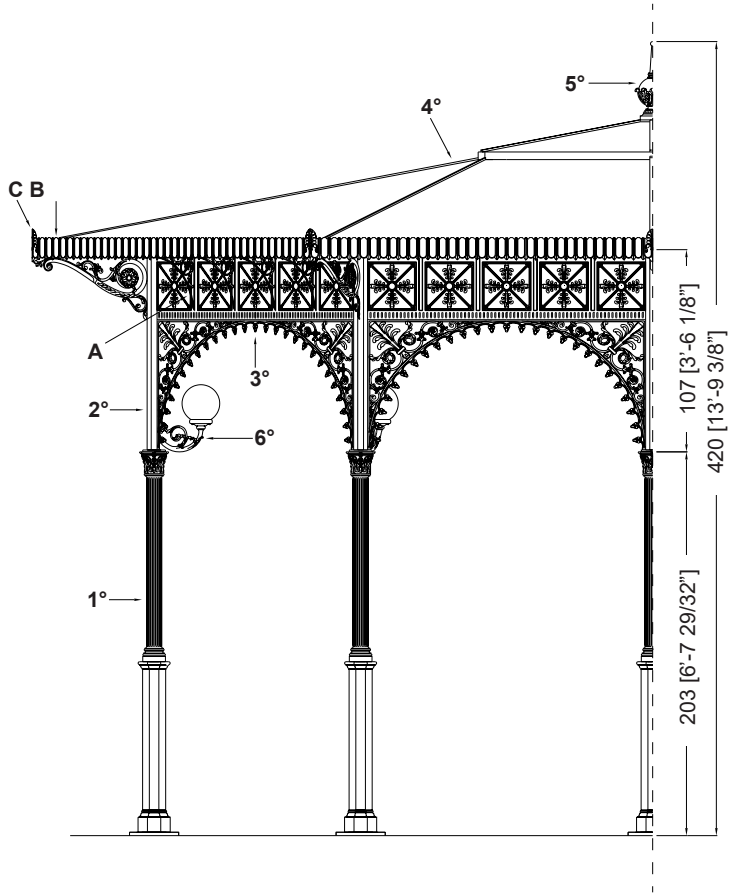

© 2006 NERI S.p.A.