

Description

Bollard made in UNI EN 1563 nodular cast iron, corresponding in shape, size and ornamentation to the diagrams, which are an integral part of the specifications.

The bollard is composed as follows:

1°) A cast iron column with a circular base (A – height 6 cm, diam. 17 cm). The central section of the column is smooth and tapered (B – height 87.5 cm, lower diam. 12 cm, top diam. 9.5 cm). The top section of the column has two cylindrical sections linked by fillets, two rings (C) cast together with the bollard, for attaching chains with a maximum diameter of 1.3 cm and a low dome.


The height above ground of the bollard is 105 cm.

Fixing system

The bollard is fitted with a cast iron fixing lug (height 25 cm, diam. 12 cm) cast together with the bollard, for cementing into the foundation plinth.

Protection of surfaces

Please refer to the specification on painting procedures of the materials.

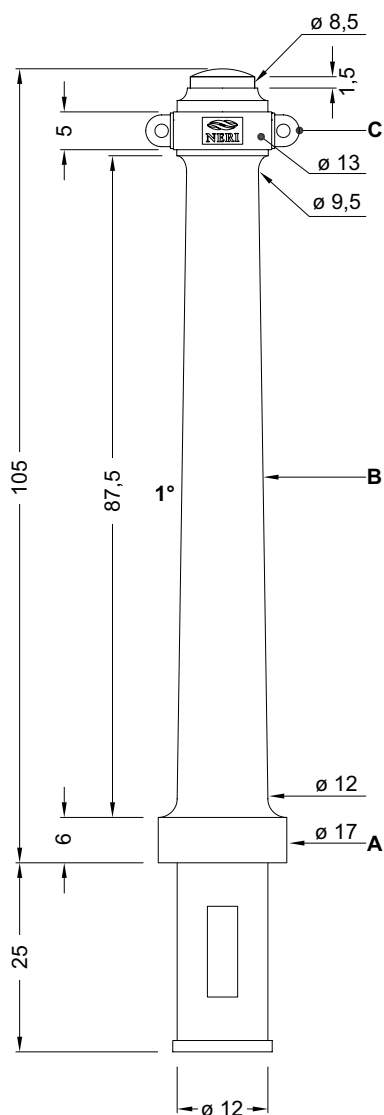

Front view

Side view