

### Description

Bollard made in UNI EN 1563 nodular cast iron, corresponding in shape, size and ornamentation to the diagrams, which are an integral part of the specifications.

The bollard is composed as follows:



1°) A cast iron column with an octagonal base (height 7.5 cm, diagonal 18 cm) that rests on a fillet at ground level (diagonal 21.5 cm). The base is surmounted by a torus (A – diam. 16.5 cm), above which there is a group of four leaves (B – height 17.5 cm, central diam. 15.5 cm). The central section of the column is tapered (C – lower diam. 8.5 cm, top diam. 7 cm, height 48 cm) and is decorated with eight flutes. The upper part of the column is 15 cm high, and has two rings (D) cast together with the bollard's column, suitable for connection to chains with a maximum diameter of 1.3 cm. Above these rings there is an ornament in the form of a sphere (E – diam. 14 cm), the lower half of which is decorated with four leaves. The height above ground of the bollard is 99 cm.

### Fixing system

The bollard is fitted with a cast iron fixing lug (height 18 cm, diam. 18 cm) cast together with the bollard, for cementing into the foundation plinth.

### Protection of surfaces

Please refer to the specification on painting procedures of the materials.

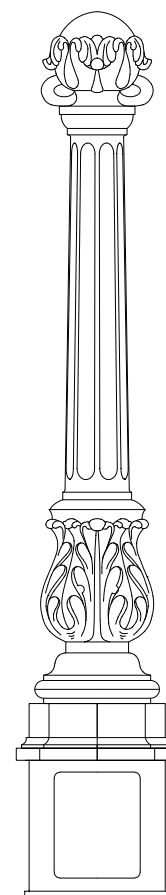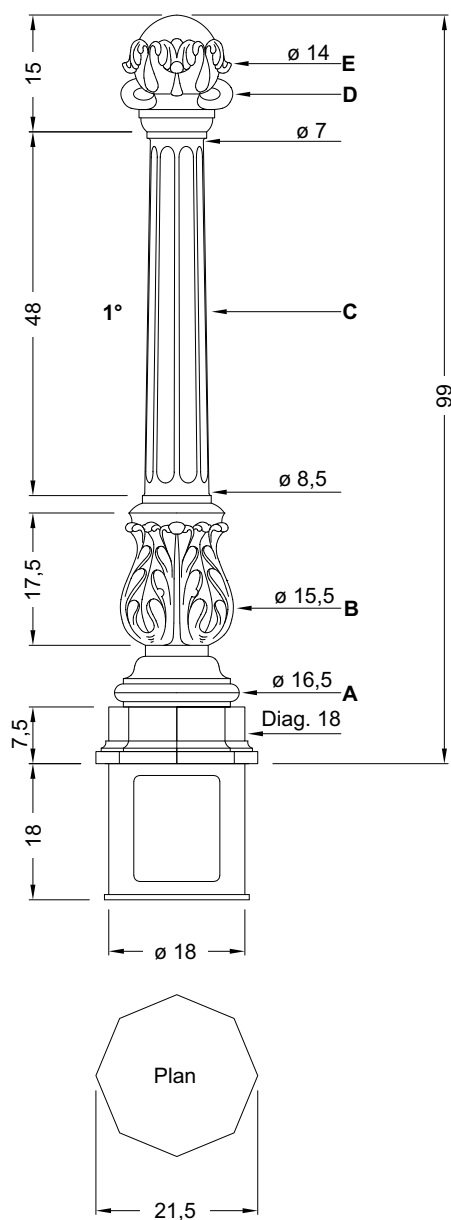

Front view