

NERI

Project location:

Project name:

Model code #:

Date

Fixture type:

Rev.0301/2024

NEBULA L (6")
Nebula Large luminaire head consists of two sources. Each source can be independently configured. The overview below lists available options.



NEBULA L
LUMINAIRE HEAD
DOWN LIGHT

ST

PR

RGBW

A

Aperture lens

Transparent flat glass

Prismatic flat glass

NEBULA L CONFIGURATION #
LUMINAIRE HEAD
DOWN LIGHT

☐ NEBULA L - EMPTY

☐ NEBULA L - ST

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> Type II	<input type="checkbox"/> 2,700K	<input type="checkbox"/> 2,500	<input type="checkbox"/> 0-10V	<input type="checkbox"/> Prismatic flat glass
<input type="checkbox"/> Type IV	<input type="checkbox"/> 3,000K	<input type="checkbox"/> 3,500		
<input type="checkbox"/> Type V	<input type="checkbox"/> 4,000K	<input type="checkbox"/> 4,500		
		<input type="checkbox"/> 6,000		

☐ NEBULA L - PR

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> 10° Very narrow spot	<input type="checkbox"/> 2,700K	<input type="checkbox"/> 2,500	<input type="checkbox"/> 0-10V	<input type="checkbox"/> Transparent flat glass
<input type="checkbox"/> 20° Narrow spot	<input type="checkbox"/> 3,000K	<input type="checkbox"/> 3,500		
<input type="checkbox"/> 35° Medium narrow spot	<input type="checkbox"/> 4,000K	<input type="checkbox"/> 4,500		
<input type="checkbox"/> 70° Medium wide flood		<input type="checkbox"/> 6,000		

☐ NEBULA L - RGBW

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> 15° Very narrow spot	<input type="checkbox"/> RGBW	500 lm (R)	<input type="checkbox"/> DMX	<input type="checkbox"/> Transparent flat glass
<input type="checkbox"/> 25° Narrow spot		390 lm (G)		
<input type="checkbox"/> 35° Medium narrow spot		133 lm (B)		
		750 lm (W)		

☐ NEBULA L - A

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> Type II	<input type="checkbox"/> Amber	700 lm	<input type="checkbox"/> 0-10V	<input type="checkbox"/> Prismatic flat glass
<input type="checkbox"/> Type V				

☐ NEBULA L - SNOOT

☐ snoot 30°

☐ snoot 45°

☐ NEBULA L - REFRACTOR SCREEN

Linear Diffusion

☐ NEBULA L - FINISH

Powder coating

☐ Neri grey

☐ Pure white

☐ White aluminum

☐ Grey aluminum

☐ Jet black

☐ Moss green

NERI

Project location:	
Project name:	
Model code #:	Date

Fixture type:	
Rev.03	01/2024

NEBULA L (6")

Nebula Large luminaire head consists of two sources. Each source can be independently configured. The overview below lists available options.

UP



NEBULA L LUMINAIRE HEAD UP LIGHT

ST

PR

RGBW

A

Aperture lens

Transparent flat glass

Prismatic flat glass

NEBULA L CONFIGURATION # LUMINAIRE HEAD UP LIGHT

☐ NEBULA L - EMPTY

☐ NEBULA L - ST

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> Type II	<input type="checkbox"/> 2,700K	<input type="checkbox"/> 2,500	<input type="checkbox"/> 0-10V	<input type="checkbox"/> Prismatic flat glass
<input type="checkbox"/> Type IV	<input type="checkbox"/> 3,000K	<input type="checkbox"/> 3,500		
<input type="checkbox"/> Type V	<input type="checkbox"/> 4,000K	<input type="checkbox"/> 4,500		
		<input type="checkbox"/> 6,000		

☐ NEBULA L - PR

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> 10° Very narrow spot	<input type="checkbox"/> 2,700K	<input type="checkbox"/> 2,500	<input type="checkbox"/> 0-10V	<input type="checkbox"/> Transparent flat glass
<input type="checkbox"/> 20° Narrow spot	<input type="checkbox"/> 3,000K	<input type="checkbox"/> 3,500		
<input type="checkbox"/> 35° Medium narrow spot	<input type="checkbox"/> 4,000K	<input type="checkbox"/> 4,500		
<input type="checkbox"/> 70° Medium wide flood		<input type="checkbox"/> 6,000		

☐ NEBULA L - RGBW

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> 15° Very narrow spot	<input type="checkbox"/> RGBW	500 lm (R)	<input type="checkbox"/> DMX	<input type="checkbox"/> Transparent flat glass
<input type="checkbox"/> 25° Narrow spot		390 lm (G)		
<input type="checkbox"/> 35° Medium narrow spot		133 lm (B)		
		750 lm (W)		

☐ NEBULA L - A

Optic system	CCT	Lumen output	Driver function	Aperture lens
<input type="checkbox"/> Type II	<input type="checkbox"/> Amber	700 lm	<input type="checkbox"/> 0-10V	<input type="checkbox"/> Prismatic flat glass
<input type="checkbox"/> Type V				

☐ NEBULA L - SNOOT

☐ snoot 30°

☐ snoot 45°

☐ NEBULA L - REFRACTOR SCREEN

Linear Diffusion

☐ NEBULA L - FINISH

Powder coating

☐ Neri grey

☐ Pure white

☐ White aluminum

☐ Grey aluminum

☐ Jet black

☐ Moss green

NERI

Nebula L - ST

Source	LED
Weight	26,4lb
Height	3' 0"
Diameter	6"
EPA	1,26 ft ²


Nebula luminaire heads are composed by two light sources. They can be both switched on or just one.



Compliance:
UL Standard 1598 CSA C22.2 no.250.0-8

Project location:	
Project name:	
Model code #:	Date

Fixture type:	
Rev.03	01/2024

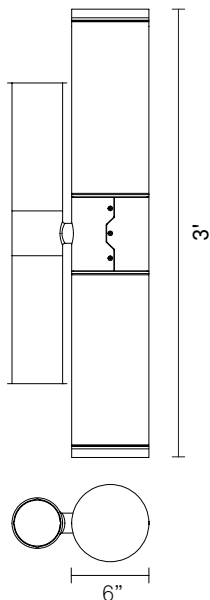

Luminaire head	Optic system	CCT	Delivered lumen choices	Driver functions	Aperture lens
Up	Type II	2,700K	2,500	0-10V	Prismatic flat glass
	Type IV	3,000K	3,500		
	Type V	4,000K	4,500		
			6,000		
Down	Type II	2,700K	2,500	0-10V	Prismatic flat glass
	Type IV	3,000K	3,500		
	Type V	4,000K	4,500		
			6,000		

SPECIFICATIONS:

Construction:

- External frame in extruded aluminum.
- Shield in extra-clear transparent or prismatic tempered glass.
- Integrated heat sink in aluminum.
- Wiring plate in galvanized steel sheet.
- Osmotic valve to balance internal/external pressure.

Materials:

- Extruded aluminum.
- Galvanized steel.
- Extra clear transparent or prismatic tempered flat glass.
- Stainless or burnished steel fasteners.

Finish:

- Powder coating or anodizing.
- Powder coating:
Neri grey, pure white, white aluminum, grey aluminum, jet black, moss green.
- Information about paint steps used on this product in specific technical sheet.

Fixing:

- Fixing by two headless screws M6 lock nuts with stainless steel.
- Central frame with a tilting system of $\pm 45^\circ$.

TECHNICAL DATA:

Electrical:

- Voltage: 120-277V (universal).
- Rated power: from 21.3 W to 52.1 W.
- Frequency: 50/60Hz.
- Protection rating: IP66, IK08.
- Operating temp.: -31°F / +95°F.
- Standard surge protection for differential/common mode 10kV/10kV.

Optical features:

- Lumen output: from 1,000 to 1,500 lm.
- Color temperature: 2,700K to 4,000K, RGBW.
- Color Rendering Index: CRI > 80
- LED type: COB CREE CMU 2287, Nebula PR (estimated life 75,000 h L80 - Tq=122°F).
- LED type: Cree XM-L Color, Nebula RGBW (estimated life 91,000 h

L90 - Tq=77°F).

- LED type: Cree XB-D Color, Nebula Amber (estimated life 60,000 h L80 - Tq=77°F).

DRIVER FUNCTIONS:

Description

0-10V (Analogic control)

DMX

NERI

Nebula L - PR

Source	LED
Weight	26,4lb
Height	3' 0"
Diameter	6"
EPA	1,26 ft²


Nebula luminaire heads are composed by two light sources. They can be both switched on or just one.



Compliance:
UL Standard 1598 CSA C22.2 no.250.0-8

Project location:	
Project name:	
Model code #:	Date

Fixture type:	
Rev.03	01/2024

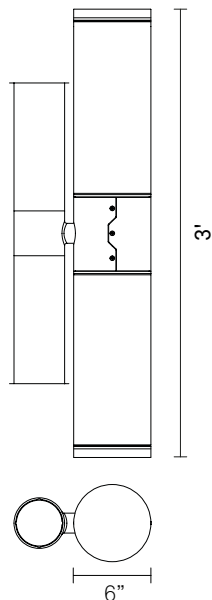

Luminaire head	Optic system	CCT	Delivered lumen choices	Driver functions	Aperture lens
Up	10° Very narrow spot	2,700K	2,500	1-10V	Transparent flat glass
	20° Narrow spot	3,000K	3,500		
	35° Medium narrow spot	4,000K	4,500		
	70° Medium wide flood		6,000		
Down	10° Very narrow spot	2,700K	2,500	1-10V	Transparent flat glass
	20° Narrow spot	3,000K	3,500		
	35° Medium narrow spot	4,000K	4,500		
	70° Medium wide flood		6,000		

SPECIFICATIONS:

Construction:

- External frame in extruded aluminum.
- Shield in extra-clear transparent or prismatic tempered glass.
- Integrated heat sink in aluminum.
- Wiring plate in galvanized steel sheet.
- Osmotic valve to balance internal/external pressure.

Materials:

- Extruded aluminum.
- Galvanized steel.
- Extra clear transparent or prismatic tempered flat glass.
- Stainless or burnished steel fasteners.

Finish:

- Powder coating or anodizing.
- Powder coating:
Neri grey, pure white, white aluminum, grey aluminum, jet black, moss green.
- Information about paint steps used on this product in specific technical sheet.

Fixing:

- Fixing by two headless screws M6 lock nuts with stainless steel.
- Central frame with a tilting system of $\pm 45^\circ$.

TECHNICAL DATA:

Electrical:

- Voltage: 120-277V (universal).
- Rated power: from 21.3 W to 52.1 W.
- Frequency: 50/60Hz.
- Protection rating: IP66, IK08.
- Operating temp.: -31°F / +95°F.
- Standard surge protection for differential/common mode 10kV/10kV.

Optical features:

- Lumen output: from 1,000 to 1,500 lm.
- Color temperature: 2,700K to 4,000K, RGBW.
- Color Rendering Index: CRI > 80
- LED type: COB CREE CMU 2287, Nebula PR (estimated life 75,000 h L80 - Tq=122°F).
- LED type: Cree XM-L Color, Nebula RGBW (estimated life 91,000 h

L90 - Tq=77°F).

- LED type: Cree XB-D Color, Nebula Amber (estimated life 60,000 h L80 - Tq=77°F).

DRIVER FUNCTIONS:

Description

0-10V (Analogic control)

DMX

NERI

Nebula L - RGBW

Source	LED
Weight	26,4lb
Height	3' 0"
Diameter	6"
EPA	1,26 ft ²


Nebula luminaire heads are composed by two light sources. They can be both switched on or just one.



Compliance:
UL Standard 1598 CSA C22.2 no.250.0-8

Project location:	
Project name:	
Model code #:	Date

Fixture type:	
Rev.03	01/2024

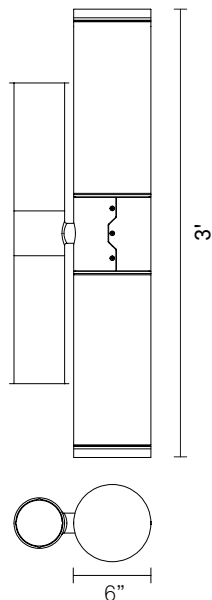

Luminaire head	Optic system	CCT	Delivered lumen choices	Driver functions	Aperture lens
Up	15° Very narrow spot 25° Narrow spot 35° Medium narrow spot	RGBW	500 lm (R) 390 lm (G) 133 lm (B) 750 lm (W)	DMX	Transparent flat glass
Down	15° Very narrow spot 25° Narrow spot 35° Medium narrow spot	RGBW	500 lm (R) 390 lm (G) 133 lm (B) 750 lm (W)	DMX	Transparent flat glass

SPECIFICATIONS:

Construction:

- External frame in extruded aluminum.
- Shield in extra-clear transparent or prismatic tempered glass.
- Integrated heat sink in aluminum.
- Wiring plate in galvanized steel sheet.
- Osmotic valve to balance internal/external pressure.

Materials:

- Extruded aluminum.
- Galvanized steel.
- Extra clear transparent or prismatic tempered flat glass.
- Stainless or burnished steel fasteners.

Finish:

- Powder coating or anodizing.
- Powder coating:
Neri grey, pure white, white aluminum, grey aluminum, jet black, moss green.
- Information about paint steps used on this product in specific technical sheet.

Fixing:

- Fixing by two headless screws M6 lock nuts with stainless steel.
- Central frame with a tilting system of $\pm 45^\circ$.

TECHNICAL DATA:

Electrical:

- Voltage: 120-277V (universal).
- Rated power: from 21.3 W to 52.1 W.
- Frequency: 50/60Hz.
- Protection rating: IP66, IK08.
- Operating temp.: -31°F / +95°F.
- Standard surge protection for differential/common mode 10kV/10kV.

Optical features:

- Lumen output: from 1,000 to 1,500 lm.
- Color temperature: 2,700K to 4,000K, RGBW.
- Color Rendering Index: CRI > 80
- LED type: COB CREE CMU 2287, Nebula PR (estimated life 75,000 h L80 - Tq=122°F).
- LED type: Cree XM-L Color, Nebula RGBW (estimated life 91,000 h

L90 - Tq=77°F).

- LED type: Cree XB-D Color, Nebula Amber (estimated life 60,000 h L80 - Tq=77°F).

DRIVER FUNCTIONS:

Description

0-10V (Analogic control)

DMX

NERI

Nebula L - A

Source	LED
Weight	26,4lb
Height	3' 0"
Diameter	6"
EPA	1,26 ft ²


Nebula luminaire heads are composed by two light sources. They can be both switched on or just one.



Compliance:
UL Standard 1598 CSA C22.2 no.250.0-8

Project location:	
Project name:	
Model code #:	Date

Fixture type:	
Rev.03	01/2024

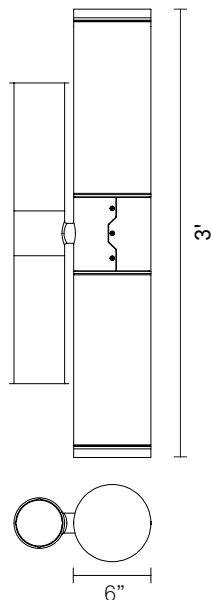

Luminaire head	Optic system	CCT	Delivered lumen choices	Driver functions	Aperture lens
Up	Type II Type V	Amber	700 lm	0-10V	Prismatic flat glass
Down	Type II Type V	Amber	700 lm	0-10V	Prismatic flat glass

SPECIFICATIONS:

Construction:

- External frame in extruded aluminum.
- Shield in extra-clear transparent or prismatic tempered glass.
- Integrated heat sink in aluminum.
- Wiring plate in galvanized steel sheet.
- Osmotic valve to balance internal/external pressure.

Materials:

- Extruded aluminum.
- Galvanized steel.
- Extra clear transparent or prismatic tempered flat glass.
- Stainless or burnished steel fasteners.

Finish:

- Powder coating or anodizing.
- Powder coating:
Neri grey, pure white, white aluminum, grey aluminum, jet black, moss green.
- Information about paint steps used on this product in specific technical sheet.

Fixing:

- Fixing by two headless screws M6 lock nuts with stainless steel.
- Central frame with a tilting system of $\pm 45^\circ$.

TECHNICAL DATA:

Electrical:

- Voltage: 120-277V (universal).
- Rated power: from 21.3 W to 52.1 W.
- Frequency: 50/60Hz.
- Protection rating: IP66, IK08.
- Operating temp.: -31°F / +95°F.
- Standard surge protection for differential/common mode 10kV/10kV.

Optical features:

- Lumen output: from 1,000 to 1,500 lm.
- Color temperature: 2,700K to 4,000K, RGBW.
- Color Rendering Index: CRI > 80
- LED type: COB CREE CMU 2287, Nebula PR (estimated life 75,000 h L80 - Tq=122°F).
- LED type: Cree XM-L Color, Nebula RGBW (estimated life 91,000 h

L90 - Tq=77°F).

- LED type: Cree XB-D Color, Nebula Amber (estimated life 60,000 h L80 - Tq=77°F).

DRIVER FUNCTIONS:

Description

0-10V (Analogic control)

DMX

NERI

Project location:

Project name:

Model code #:

Date

Fixture type:

Rev.03

01/2024

NEBULA L - ST

Prismatic flat glass - COB LED

2,700K

lm tot	W tot	lm/W
2,500	23.2	108
3,500	32.5	108
4,500	42.1	107
5,500	52.2	105

3,000K


lm tot	W tot	lm/W
2,500	22.1	113
3,500	30.8	114
4,500	39.8	113
5,500	49.3	112

4,000K

lm tot	W tot	lm/W
2,500	21.3	117
3,500	29.7	118
4,500	38.4	117
6,000	52.1	115

Type II

Prismatic flat glass

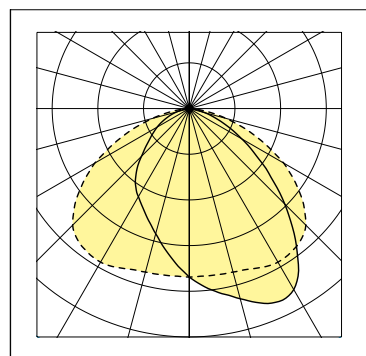


LOR 100%

Full Cutoff




Type IV

Prismatic flat glass

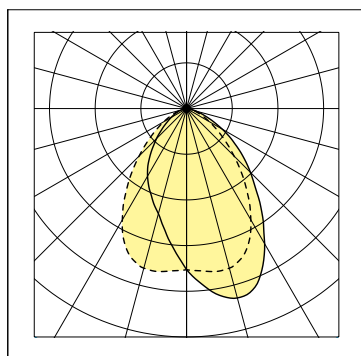


LOR 100%

Full Cutoff




Type V

Prismatic flat glass

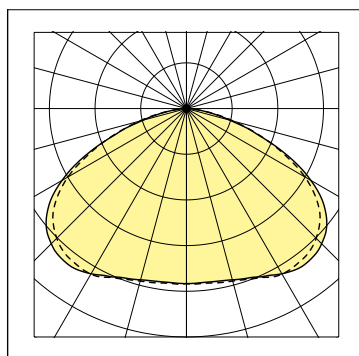


LOR 100%

Full Cutoff

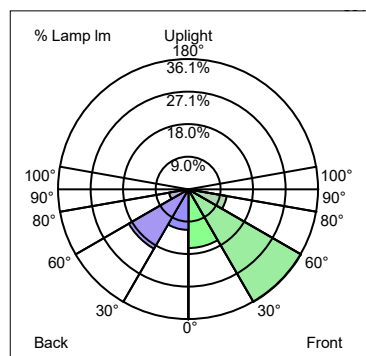


LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	16.3	16.3
FM	30° - 60°	36.1	36.1
FH	60° - 80°	10.8	10.8
FVH	80° - 90°	0.7	0.7
BL	0° - 30°	11.3	11.3
BM	30° - 60°	19.1	19.1
BH	60° - 80°	5.4	5.4
BVH	80° - 90°	0.3	0.3
UL	90° - 100°	0.0	0.0
UH	100° - 180°	0.0	0.0
Totals		100.0	100.0

BUG: B2 U1 G1

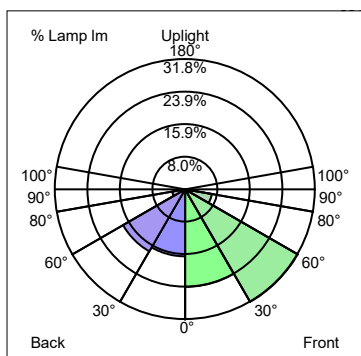

LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	23.9	23.9
FM	30° - 60°	31.8	31.8
FH	60° - 80°	6.7	6.7
FVH	80° - 90°	0.3	0.3
BL	0° - 30°	16.4	16.4
BM	30° - 60°	17.5	17.5
BH	60° - 80°	3.2	3.2
BVH	80° - 90°	0.2	0.2
UL	90° - 100°	0.0	0.0
UH	100° - 180°	0.0	0.0
Totals		100.0	100.0

BUG: B2 U1 G1

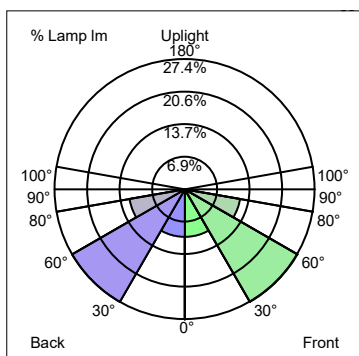

LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	10.0	10.0
FM	30° - 60°	27.4	27.4
FH	60° - 80°	11.8	11.8
FVH	80° - 90°	0.7	0.7
BL	0° - 30°	10.0	10.0
BM	30° - 60°	27.4	27.4
BH	60° - 80°	11.8	11.8
BVH	80° - 90°	0.7	0.7
UL	90° - 100°	0.0	0.0
UH	100° - 180°	0.0	0.0
Totals		100.0	100.0

BUG: B2 U1 G1

NERI

NEBULA L - PR

Transparent flat glass - COB LED

Project location:

Project name:

Model code #:

Date

Fixture type:

Rev.03

01/2024

2,700K

lm tot	W tot	lm/W
2,500	21.3	118
3,500	29.6	118
4,500	38.3	118
6,000	51.9	116

3,000K


lm tot	W tot	lm/W
2,500	20.2	124
3,500	28.1	124
4,500	36.3	124
6,000	49.0	122

4,000K

lm tot	W tot	lm/W
2,500	19.5	128
3,500	27.1	129
4,500	34.9	129
6,000	47.2	127


10° Very narrow spot

Transparent flat glass

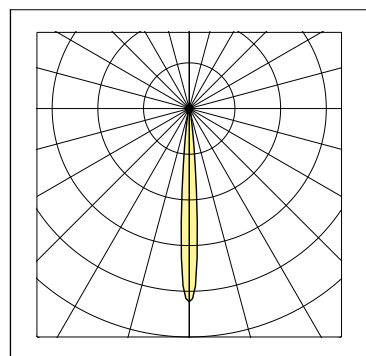


20° Narrow spot

Transparent flat glass

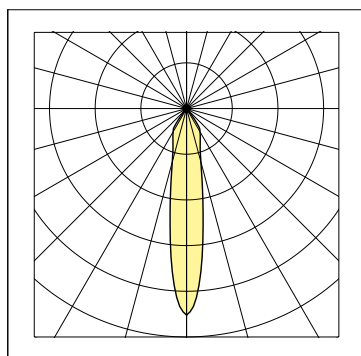


35° Medium narrow spot

Transparent flat glass

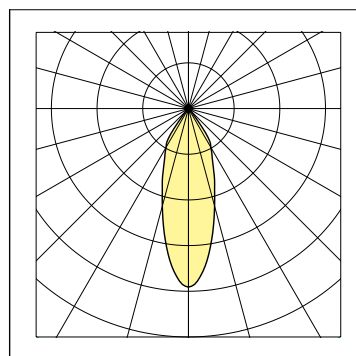

70° Medium wide flood

Transparent flat glass

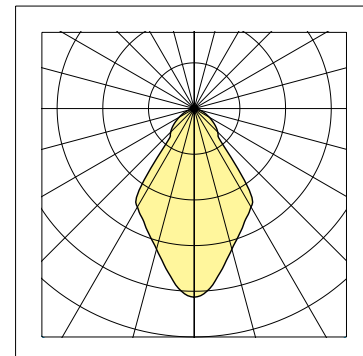

LOR 100%

Full Cutoff

NEMA class 2x2



LOR 100%

Full Cutoff

NEMA class 4x4



LOR 100%

Full Cutoff


NEMA class 5x5



LOR 100%


Full Cutoff

NEMA class 6x6

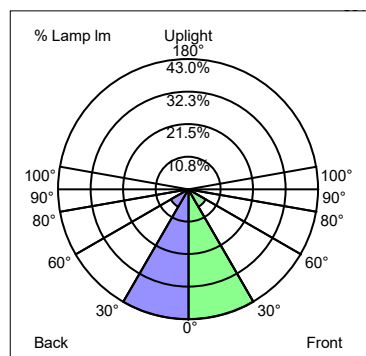


LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	43.0	43.0
FM	30° - 60°	6.7	6.7
FH	60° - 80°	0.3	0.3
FVH	80° - 90°	0.0	0.0
BL	0° - 30°	43.0	43.0
BM	30° - 60°	6.7	6.7
BH	60° - 80°	0.3	0.3
BVH	80° - 90°	0.0	0.0
UL	90° - 100°	0.0	0.0
UH	100° - 180°	0.0	0.0
Totals		100.0	100.0

BUG: B4 U1 G0

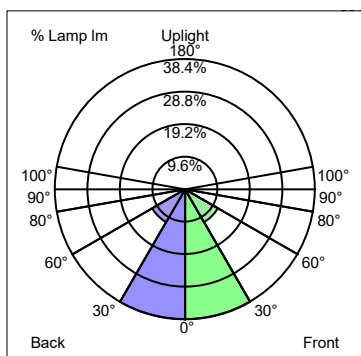


LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	38.4	38.4
FM	30° - 60°	11.2	11.2
FH	60° - 80°	0.4	0.4
FVH	80° - 90°	0.0	0.0
BL	0° - 30°	38.4	38.4
BM	30° - 60°	11.2	11.2
BH	60° - 80°	0.4	0.4
BVH	80° - 90°	0.0	0.0
UL	90° - 100°	0.0	0.0
UH	100° - 180°	0.0	0.0
Totals		100.0	100.0

BUG: B3 U1 G0

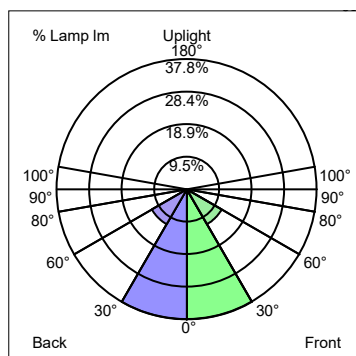

LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	37.8	37.8
FM	30° - 60°	11.7	11.7
FH	60° - 80°	0.4	0.4
FVH	80° - 90°	0.0	0.0
BL	0° - 30°	37.8	37.8
BM	30° - 60°	11.7	11.7
BH	60° - 80°	0.4	0.4
BVH	80° - 90°	0.0	0.0
UL	90° - 100°	0.0	0.0
UH	100° - 180°	0.0	0.0
Totals		100.0	100.0

BUG: B3 U2 G0

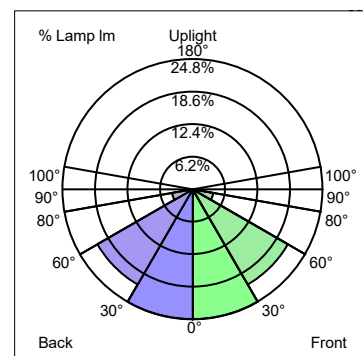

LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	24.8	24.8
FM	30° - 60°	21.0	21.0
FH	60° - 80°	4.0	4.0
FVH	80° - 90°	0.2	0.2
BL	0° - 30°	24.8	24.8
BM	30° - 60°	21.0	21.0
BH	60° - 80°	4.0	4.0
BVH	80° - 90°	0.2	0.2
UL	90° - 100°	0.0	0.0
UH	100° - 180°	0.0	0.0
Totals		100.0	100.0

BUG: B3 U1 G1

Neri North America 250 Catalonia Ave, Ste. 804 Coral Gables, FL 33143 - T: +1 786 315 4367.

Made in Italy © 2022 NERI S.p.A. All Rights Reserved. The information in this document is subject to change without notice.
Company shall reserve the right at any time and from time to time to modify the specifications or features or to discontinue the sale of any products.

NERI

Project location:	
Project name:	
Model code #:	Date

Fixture type:	
Rev.03	01/2024

NEBULA L - RGBW


Transparent flat glass - High Power LED

RGBW

Color	lm	λ (nm)
Red	500 (R)	623
Green	390 (G)	517
Blu	133 (B)	455
White	750 (W)	-

15° Very narrow spot

Transparent flat glass

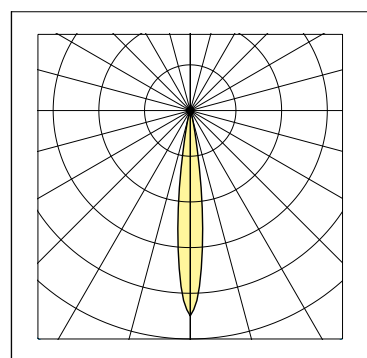


LOR 100%
Full Cutoff
NEMA class 2x2



25° Narrow spot

Transparent flat glass

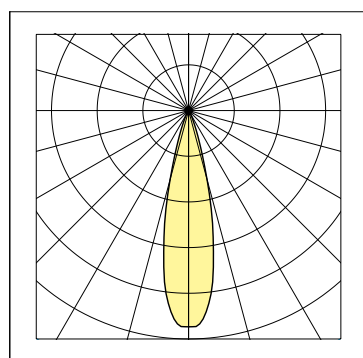


LOR 100%
Full Cutoff
NEMA class 3x3



35° Medium narrow spot

Transparent flat glass

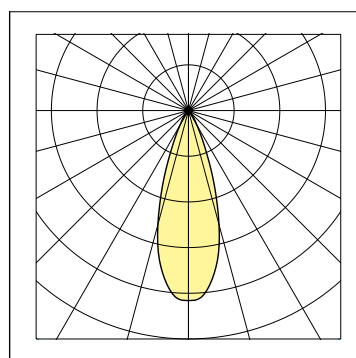

LOR 100%
Full Cutoff
NEMA class 4x4



Project location:	
Project name:	
Model code #:	Date


Fixture type:	
Rev.03	01/2024

NEBULA L - AMBER
Prismatic flat glass - High Power LED


Amber		
Color	lm	λ (nm)
Amber	700	598

Type II
Prismatic flat glass

Type V
Prismatic flat glass



LOR 100%
Full Cutoff



LOR 100%
Full Cutoff

