

Description

Bollard made in UNI EN 1563 nodular cast iron, corresponding in shape, size and ornamentation to the diagrams, which are an integral part of the specifications.

The bollard is composed as follows:

1°) A cast iron column fitted with a base flange (A – height 3 cm, diam. 18 cm), surmounted by circular band (B – height 3 cm, diam. 10.5 cm) and a horizontal groove (C - diam. 9.2 cm). Above this groove there is a column with base diameter 10.2 cm (D), central diameter 5.5 cm (E) and top diameter 8 cm (F). The upper part of the bollard has two rings (G) cast together with the bollard's column, suitable for connection to chains with a maximum diameter of 1.3 cm. The column terminates with a hemisphere (H – diam. 8 cm), separated from the column by a groove similar to the groove at the base.



The height above ground of the bollard is 93 cm.

Fixing system


The bollard is fitted with a cast iron fixing lug (height 20 cm, diam. 12.5 cm) cast together with the bollard, for cementing into the foundation plinth.

Protection of surfaces

Please refer to the specification on painting procedures of the materials.

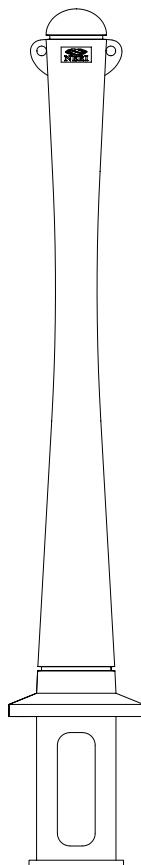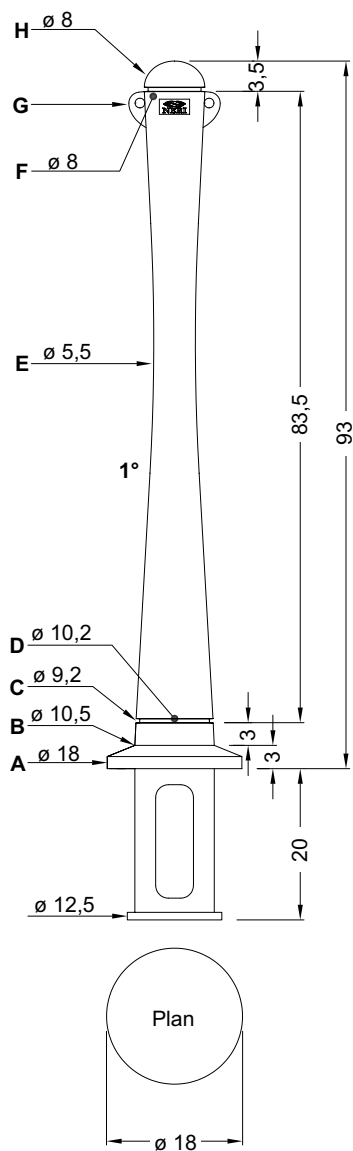

Front view

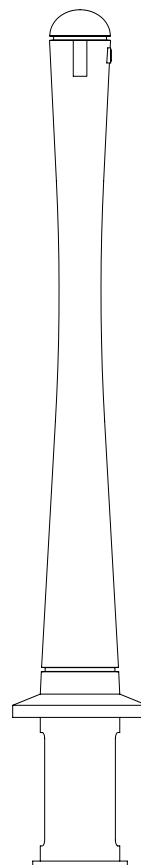

Side view