

Description

Fixed bollard made in S235J UNI EN 10219-1 steel, hot-galvanized throughout to UNI EN ISO 1461 standards, corresponding in shape, size and ornamentation to the diagrams, which are an integral part of the specifications.

The bollard is composed as follows:


- 1°) A support tube in steel, height 90 cm, with a conical form (lower diam. 8.0 cm, upper diam. 6.0 cm), with a fixing lug height 20 cm to be cemented into the foundation plinth and in the upper part of two rings (A) for connection to chains.
 - 2°) A steel decorative element with an inclined cut, fixed on the top of the supporting tube (1°). Shapes and sizes are as shown in the diagram.
- The height above ground of the bollard is 99 cm.

Fixing system


The bollard is supplied with a cast iron fixing lug (height 20 cm, diam. 4.8 cm) cast together with the bollard, to be cemented into the foundation plinth.

Protection of surfaces

Please refer to the specification on painting procedures of the materials.

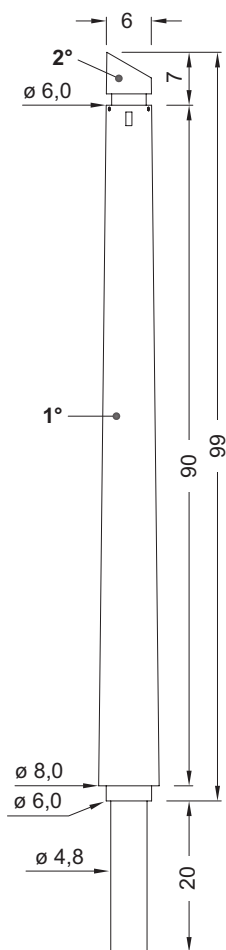

Side view

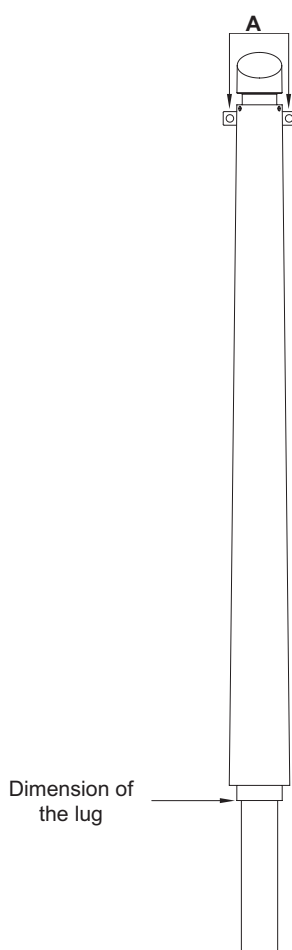

Back view



3D view