

### Description


Litter bin with ashtray in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron, FE 360 UNI EN 10219-1 steel and steel sheet hot-galvanized to UNI EN ISO 1461 standards, corresponding in shape, size and ornamentation to the diagrams, which are an integral part of the specifications.

The litter bin is composed as follows:


- 1°) A support tube in steel, height 102 cm, diam. 6.0 cm, with a fixing lug height 15 cm for cementing into the foundation plinth.
  - 2°) A base in cast iron, height 7 cm and tapered (lower diam. 9 cm, top diam. 8.5 cm), decorated at the top with a torus and fixed to the support tube (1°) with three M6 grub screws.
  - 3°) Two bins in sheet steel, thickness 15/10 mm, height 53.5 cm, diam. 30 cm. Each bin is fixed at two points: at the bottom with a hinged bracket (B) that allows the bin to be rotated for emptying; at the top by a locking mechanism with key (A). The bottom of each bin has holes that allow water to drain away.
  - 4°) A terminal in cast iron, height 8.5 cm, at the top of the support tube (1°). The element is decorated with two tori and a sphere, diam. 6.0 cm.
  - 5°) Two stainless steel rings to hold the sacs.
  - 6°) An ashtray in hot-galvanized steel sheet, fixed to the support tube with two M8 stainless steel screws (1°).
- The total height of the litter bin is 110 cm, with a maximum width of 70 cm. The bin can hold 74 litres of litter.

### Protection of surfaces


Please refer to the specification on painting procedures of the materials.

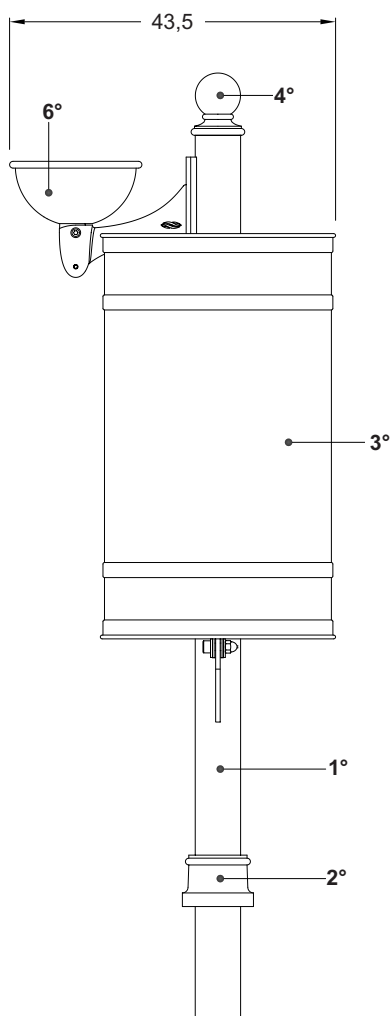

Front view

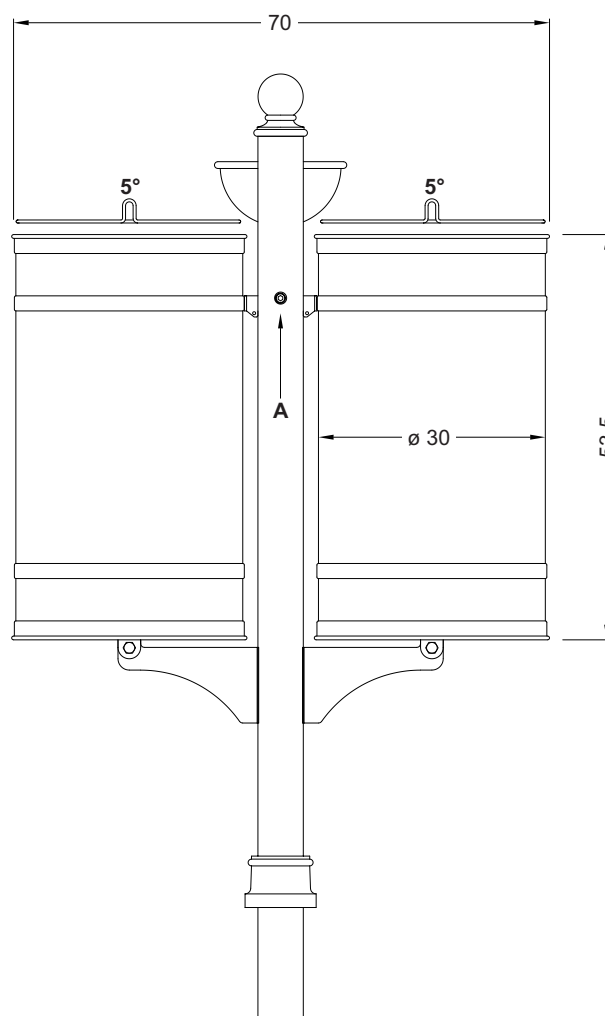

Side view

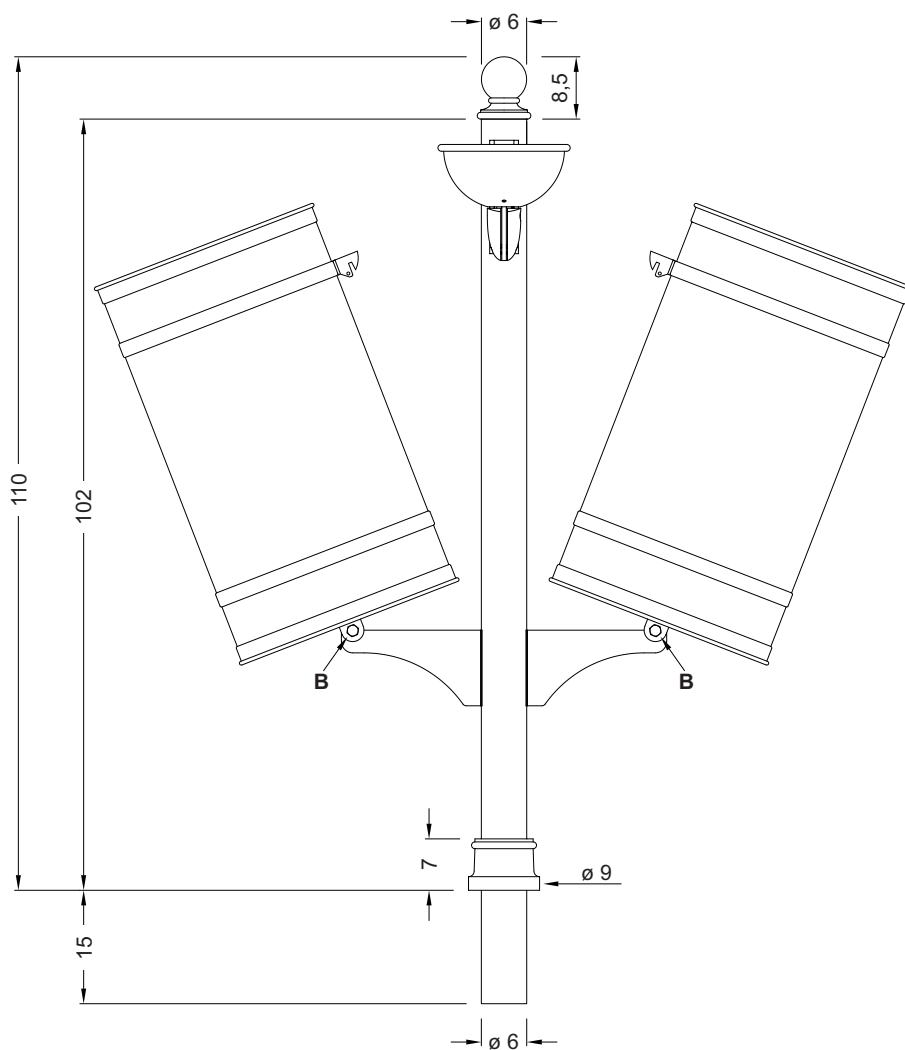

Side view - Released litter bins