

Description

Bollard made in UNI EN 1563 nodular cast iron, corresponding in shape, size and ornamentation to the diagrams, which are an integral part of the specifications.

The bollard is composed as follows:

1°) A cast iron column with a circular base (A – height 6 cm, diam. 13 cm). The central section of the column is smooth and tapered (B – height 46 cm, lower diam. 10 cm, top diam. 8 cm). The upper section of the column has two cylindrical sections (C – height 5.5 cm, diam. 11 cm, D – height 1.5 cm, diam. 7.5 cm) connected by fillets, and the top of the column terminates in a low dome.



The height above ground of the bollard is 63 cm.

Fixing system


The bollard is fitted with a cast iron fixing lug (height 14 cm, diam. 12 cm) cast together with the bollard, for cementing into the foundation plinth.

Protection of surfaces

Please refer to the specification on painting procedures of the materials.

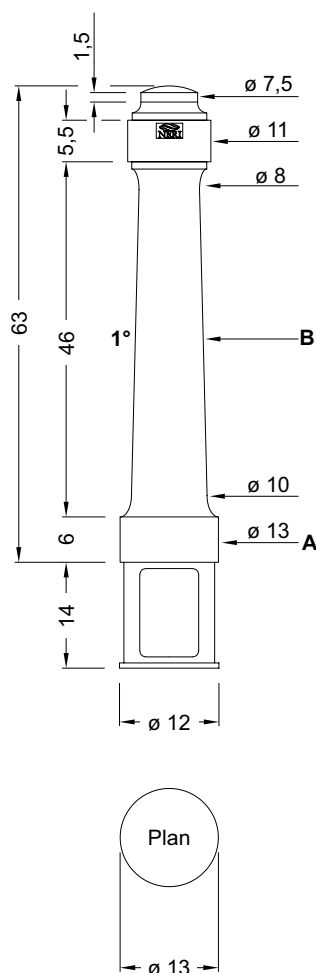

Front view



Side view