

Project location:			
Project name:			
Model #:	2275.001	Date	

Description

Litter bin in UNI EN 1561 cast iron, FE 360 UNI EN 10219-1 steel and steel sheet hot-galvanized to UNI EN ISO 1461 standards, corresponding in shape, size and ornamentation to the diagrams, which are an integral part of the specifications.

The litter bin is composed as follows:

1°) A support tube in steel, height 3' 4 1/4", diam. 2 1/4", with a fixing lug height 6" for cementing into the foundation plinth.

2°) A base in cast iron, height 2 3/4" and tapered (lower diam. 3 2/4", top diam. 3 1/4"), decorated at the top with a torus and fixed to the support tube (1) with three M6 grubscrews.

3°) Two bins in sheet steel, thickness 2/4", height 21", diam. 11 3/4". Each bin is fixed at two points: at the bottom with a hinged bracket (B) that allows the bin to be rotated for emptying; at the top by a locking mechanism with key (A) and a chain (C) to prevent the bin from falling when opened. The bottom of each bin has holes that allow water to drain away.

4°) Two covers in sheet steel, thickness 3/4", height 2", diam. 12 2/4", welded to the support tube with sheet steel brackets.


5°) A terminal in cast iron, height 3 1/4", at the top of the support tube (1). The element is decorated with two tori and a sphere, diam. 2 1/4".

6°) A stainless steel ring to hold the sac.

The total height of the litter bin is 3' 7 1/4", with a maximum width of 27 2/4". The bin can hold 9.77 gal of litter.

Protection of surfaces

Please refer to the specification on painting procedures of the materials.

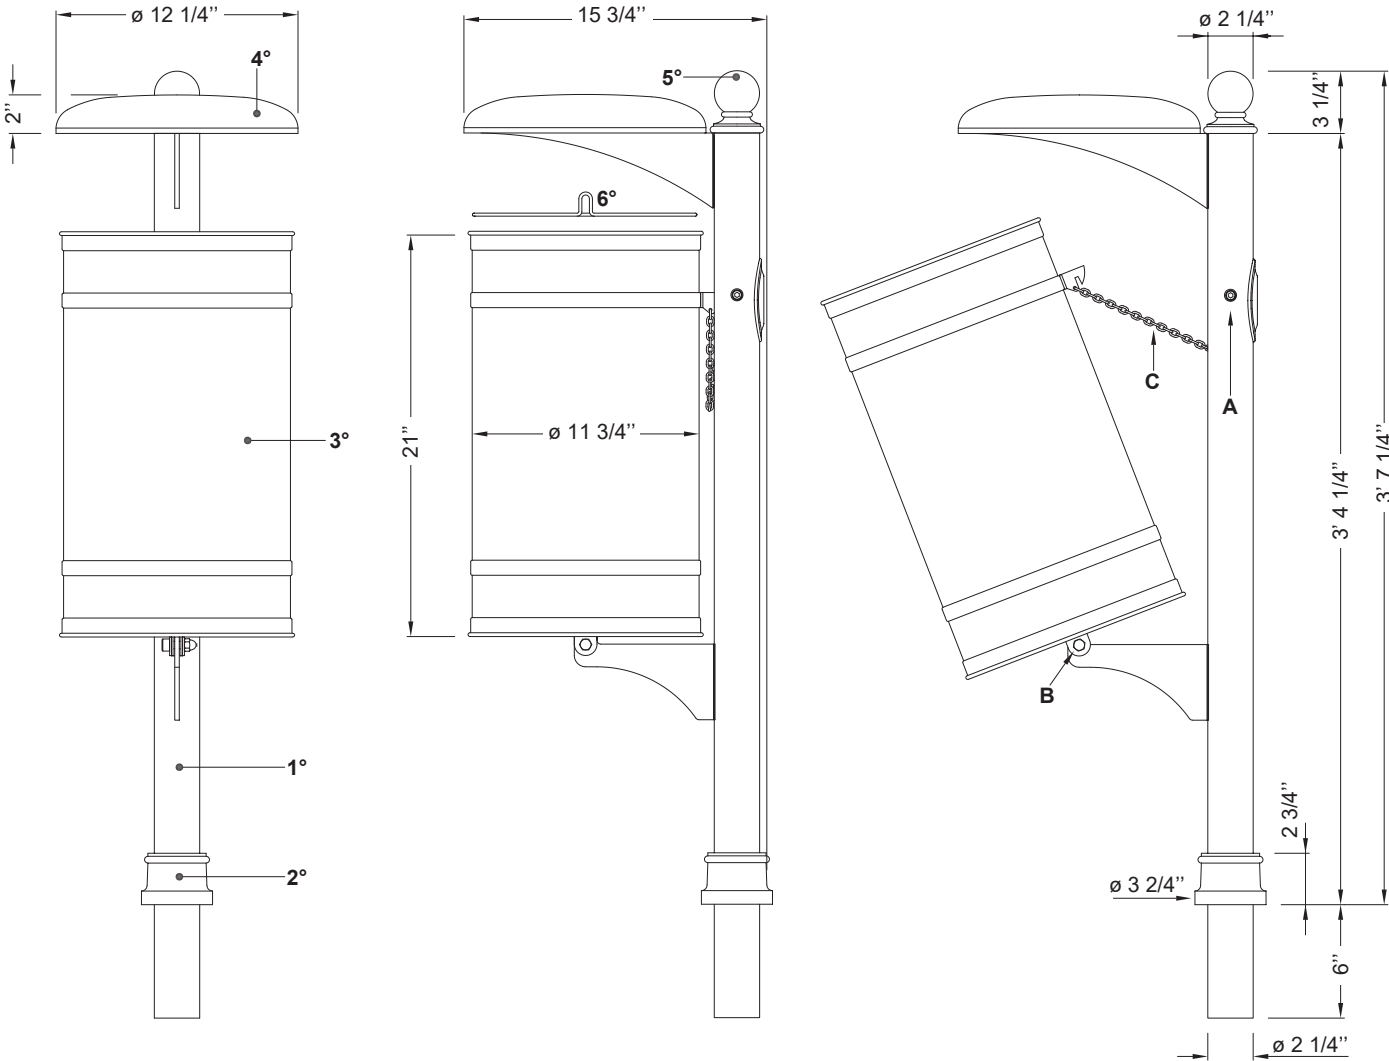

Front view

Side view

Side view - Released litter bin