



**NERI**

Nebula Venezia

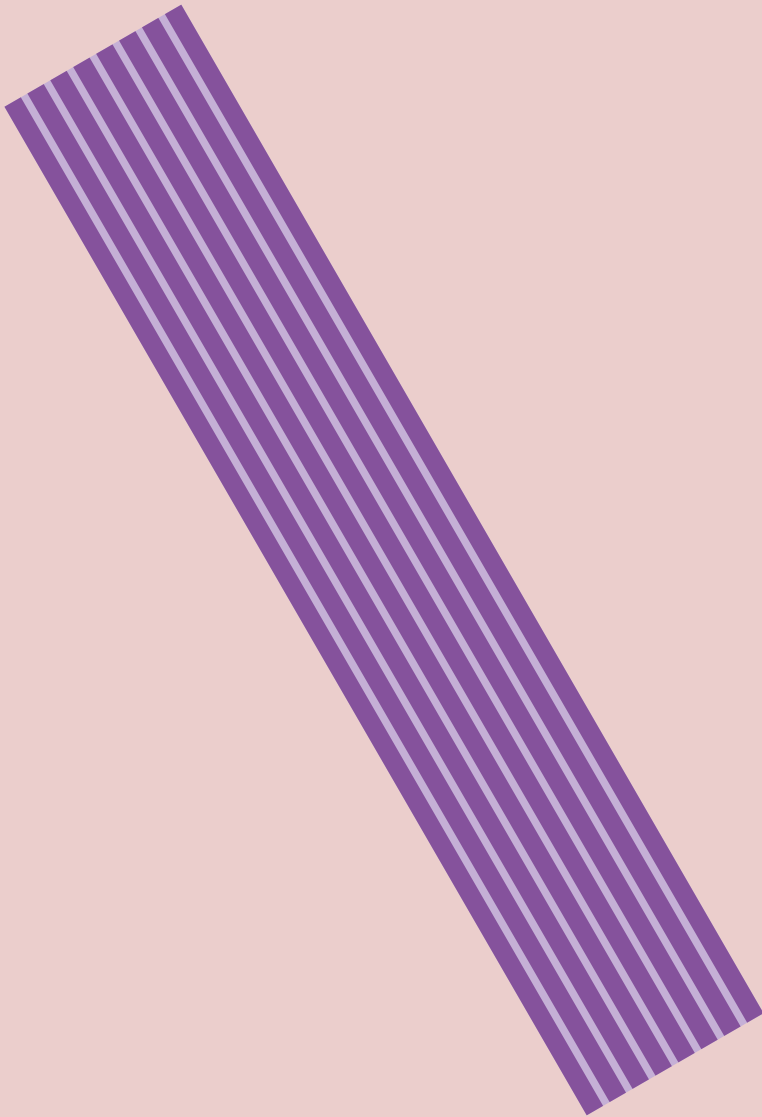

# Nebula Venezia restores light's own creative potential.

Its transparency evokes the ancient glassmaking tradition that has always enchanted our urban landscapes, both day and night.

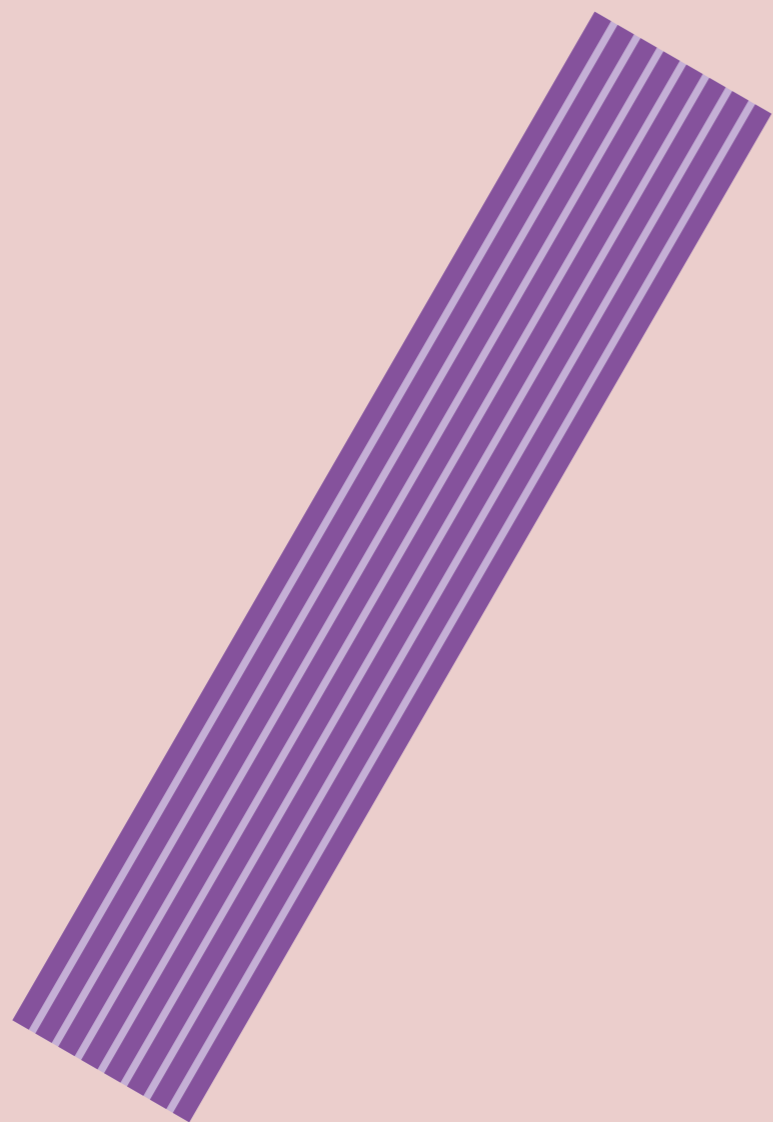

Neri - Nebula Collection - Nebula Venezia



Nebula Venezia restores light's own creative potential.



During the daytime, Nebula Venezia dresses the city with beauty and well-being.

Nebula Venezia restores light's own creative potential.



At night the harmony of light, colour and transparency ignite emotions that enrich our experience of the world.

Nebula Venezia restores light's own creative potential.



It resonates with the bright glow of history and art which blend in perfect harmony with the modernity of its contemporary design.

# Nebula Venezia restores light's own creative potential.

Nebula Venezia is light that becomes culture.

## MAIN TECHNICAL DATA

CE

### STRUCTURE – MAIN COMPONENTS

LED decorative module (RGBA).  
External cover in PMMA.  
Internal frame in extruded aluminium.  
Shield in extra-clear transparent or prismatic tempered glass with impact resistance IK08 (EN 62262).  
Integrated heat sink in aluminium.  
Osmotic valve to balance internal/external pressure.

### FINISH

Brilliant Aluminium RAL9006

### SUPPLY VOLTAGE

220-240V, 50/60Hz Frequency

### SURGE PROTECTION

Up to 10kV/10kV

### INTEGRAL POWER SUPPLY

Electronic power supply with protection against short circuits, overheating and power surges

### POWER FACTOR CORRECTION

PFC > cos  $\phi$  0.9

### ELECTRICAL INSULATION

Class II, Class I (on demand)

### ENCLOSURE PROTECTION

Water and dust IP66  
Mechanical impacts IK08

### COLOUR RENDERING INDEX:

> 80

-

Neri SpA reserves the right to modify its products and documentation without obligation to give prior warning

## SCREEN SHAPE

PRISMATIC FLAT GLASS

TRANSPARENT FLAT GLASS

## OPTIC SYSTEM

DECORATIVE LIGHT

TYPE I

TYPE II

TYPE IV

TYPE V

MEDIUM NARROW SPOT 30°

MEDIUM FLOOD 60°

MEDIUM WIDE FLOOD 70°

80°

## COLOUR TEMPERATURE

2,700K

3,000K

4,000K

RGBA FOR DECORATIVE LIGHT

## FLUX SIZE OPTIONS

PR

1,000lm

1,500lm

2,500lm

ST

1,000lm


1,500lm

## DRIVER FUNCTIONS

ON-OFF

NVL + PRIORITY DALI

DMX FOR DECORATIVE LIGHT

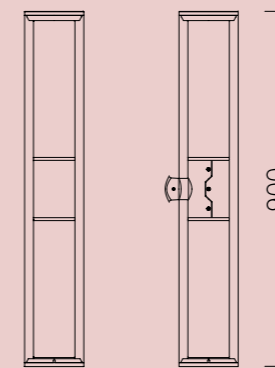

150

Neri S.p.A.  
S.S. Emilia 1622  
47020 Longiano (FC) · Italy  
T +39 0547 652111

Neri North America Inc.  
250 Catalonia Ave, Ste. 804  
Coral Gables, FL 33143  
T +1 786 315 4367

Neri Lighting India Pvt. Ltd.  
Plot no 46-A, Malur 4th Phase,  
KIADB Industrial area,  
Malur – Karnataka · 563130

Neri S.p.A. (DMCC Branch)  
29-29 Reef Tower Cluster O  
JLT – Jumeirah Lake Towers  
P.O. Box: 5003348 · Dubai · UAE  
T +971 4 448 7246  
F +971 4 448 7112

[www.neri.biz](http://www.neri.biz)

© March 2024 · Neri S.p.A.