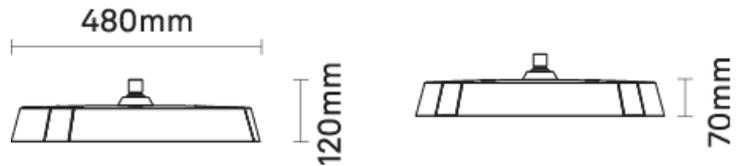## Polis Suspended | Luminaire | Polis Suspended



480mm

120mm

70mm

Ordering Information / Guide

Example: **LUPOL02-U-D36-730-L120-ST-V0-F11-MU-CN0**

| Optique | Ra+K | Luminous flux | Screen finish | Power supply | Driver Function | ISO Class | Finish |
|---------|------|---------------|---------------|--------------|-----------------|-----------|--------|
| **D28**<br>T1 short | **722**<br>Ra70 2200 K | **L015**<br>1500 lm | **ST**<br>Transparent | **V0**<br>120V-277V | **F35**<br>0-10V+CLO | **MU**<br>UL | **CN0**<br>Grey [Neri] Textured |
| **D36**<br>T2 medium | **727**<br>Ra70 2700 K | **L025**<br>2500 lm | | | **F11**<br>NEMA-3 | | |
| **D22**<br>T3 narrow | **730**<br>Ra70 3000 K | **L035**<br>3500 lm | | | **F12**<br>NEMA-7 | | |
| **D25**<br>T2 narrow | **740**<br>Ra70 4000 K | **L045**<br>4500 lm | | | | | |
| **D37**<br>T3 medium | | **L060**<br>6000 lm | | | | | |
| **D24**<br>T4 wide | | **L075**<br>7500 lm | | | | | |
| **D38**<br>T4 medium | | **L090**<br>9000 lm | | | | | |
| **D30**<br>T5 square medium | | **L105**<br>10500 lm | | | | | |
| | | **L120**<br>12000 lm | | | | | |

Generated code: **LUPOL02 - U** - _ _ _ - _ _ _ - _ _ _ _ - _ _ - _ _ - _ _ _ - _ _ - _ _ _

**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com**
Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

**02/20/2026**

**Page 1 of 8**

## Polis Suspended | Luminaire | Polis Suspended

### SOURCE

High-power LED matrix.
**Standard Deviation Colour Matching** ≤5

### LIGHTING CHARACTERISTICS

Modular 2x2 refractive lenses in PMMA.

### MECHANICAL CHARACTERISTICS

Structure made of die-cast aluminum (UNI EN 1706) with a main body and integrated heat sink.
Protective shield in extra-clear screen-printed tempered glass with IK09 impact resistance (EN 62262) and white internal reflector in polycarbonate.
EPDM seal between glass and upper cover, supported by steel sheet and stainless steel screws.

### INSTALLATION

Suspended: threaded connection G3/4".

### WARNINGS

Luminaire designed for disposal/recycling at end-of-life.
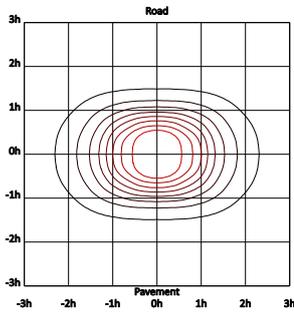Replaceable (LED only) light source by a professional.
Replaceable control gear by a professional.
Protection of surfaces: please refer to the specification on painting procedures of the materials.

**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com**
Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

**02/20/2026**

**Page 2 of 8**

# NERI

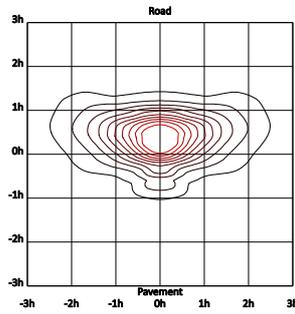## Polis Suspended | Luminaire | Polis Suspended
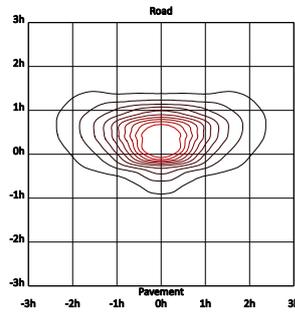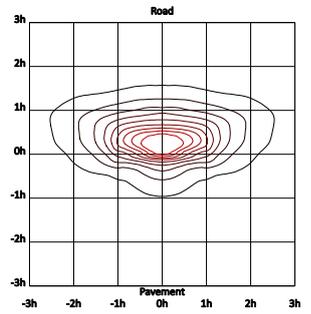
### T1 short
Transparent



### T2 medium
Transparent



### T3 narrow
Transparent



### T2 narrow
Transparent



### T3 medium
Transparent
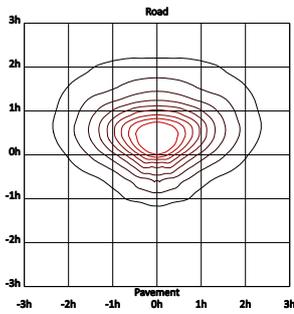


### T4 wide
Transparent
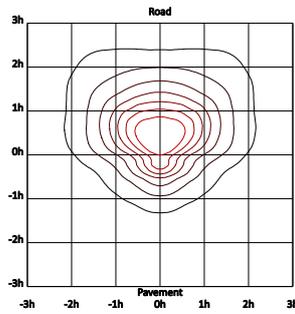


### T4 medium
Transparent
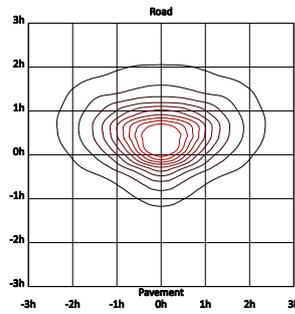


### T5 square medium
Transparent
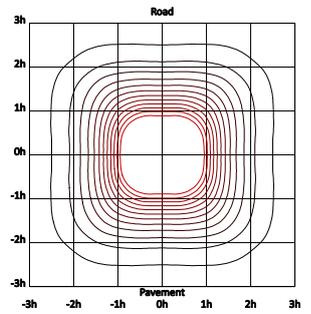
**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com**  **02/20/2026**

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.  **Page 3 of 8**

# NERI

## Polis Suspended | Luminaire | Polis Suspended

| Luminous Flux | Nominal CCT | W | lm/W | n° led | Optic | Screen | BUG | | |
|---|---|---|---|---|---|---|---|---|---|
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T5 square medium | Transparent | 3 | 0 | 2 |
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T1 short | Transparent | 3 | 0 | 3 |
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T2 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 2700 K | 87.2 | 138 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T5 square medium | Transparent | 3 | 0 | 2 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T1 short | Transparent | 3 | 0 | 3 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T2 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 3000 K | 84.6 | 142 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T5 square medium | Transparent | 3 | 0 | 2 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T1 short | Transparent | 3 | 0 | 3 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T2 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 12000 lm | 4000 K | 80.7 | 149 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T4 wide | Transparent | 0 | 0 | 0 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T3 narrow | Transparent | 0 | 0 | 0 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T2 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T3 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 2700 K | 10.4 | 144 | 16 | T4 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T4 wide | Transparent | 0 | 0 | 0 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T3 narrow | Transparent | 0 | 0 | 0 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T2 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T3 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 3000 K | 10.2 | 147 | 16 | T4 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T4 wide | Transparent | 0 | 0 | 0 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T3 narrow | Transparent | 0 | 0 | 0 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T2 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T3 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 4000 K | 9.7 | 155 | 16 | T4 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T4 wide | Transparent | 0 | 0 | 0 |
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T3 narrow | Transparent | 0 | 0 | 0 |
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T2 medium | Transparent | 0 | 0 | 0 |
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T3 medium | Transparent | 0 | 0 | 0 |

**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com**  **02/20/2026**

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.  **Page 4 of 8**

# NERI

## Polis Suspended | Luminaire | Polis Suspended

| Luminous Flux | Nominal CCT | W | lm/W | n° led | Optic | Screen | BUG | | |
|---|---|---|---|---|---|---|---|---|---|
| 1500 lm | 2200 K | 11.4 | 132 | 16 | T4 medium | Transparent | 0 | 0 | 0 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 2700 K | 17 | 147 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 3000 K | 16.6 | 151 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 4000 K | 15.8 | 158 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T5 square medium | Transparent | 1 | 0 | 0 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T1 short | Transparent | 1 | 0 | 1 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 2500 lm | 2200 K | 18.8 | 133 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T5 square medium | Transparent | 2 | 0 | 0 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 2700 K | 23.8 | 147 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T5 square medium | Transparent | 2 | 0 | 0 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 3000 K | 23.2 | 151 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T5 square medium | Transparent | 2 | 0 | 0 |
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T2 medium | Transparent | 1 | 0 | 1 |

**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com** **02/20/2026**

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

**Page 5 of 8**

## Polis Suspended | Luminaire | Polis Suspended

| Luminous Flux | Nominal CCT | W | lm/W | n° led | Optic | Screen | BUG | | |
|---|---|---|---|---|---|---|---|---|---|
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 4000 K | 22.1 | 158 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T5 square medium | Transparent | 2 | 0 | 0 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 3500 lm | 2200 K | 27.5 | 127 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T5 square medium | Transparent | 2 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 2700 K | 32.5 | 138 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T5 square medium | Transparent | 2 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 3000 K | 31.6 | 142 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T5 square medium | Transparent | 2 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 4000 K | 30.1 | 150 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T4 wide | Transparent | 1 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T5 square medium | Transparent | 2 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T1 short | Transparent | 2 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T3 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T2 narrow | Transparent | 1 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T2 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T3 medium | Transparent | 1 | 0 | 1 |
| 4500 lm | 2200 K | 36.3 | 124 | 16 | T4 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T4 wide | Transparent | 1 | 0 | 1 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T3 narrow | Transparent | 1 | 0 | 1 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T2 narrow | Transparent | 1 | 0 | 1 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T2 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T3 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 2700 K | 42.9 | 140 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T4 wide | Transparent | 1 | 0 | 1 |
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T3 narrow | Transparent | 1 | 0 | 1 |
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T2 narrow | Transparent | 1 | 0 | 1 |

**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com**          **02/20/2026**

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.          **Page 6 of 8**

## Polis Suspended | Luminaire | Polis Suspended

| Luminous Flux | Nominal CCT | W | lm/W | n° led | Optic | Screen | BUG | | |
|---|---|---|---|---|---|---|---|---|---|
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T2 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T3 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 3000 K | 41.8 | 144 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T4 wide | Transparent | 1 | 0 | 1 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T3 narrow | Transparent | 1 | 0 | 1 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T2 narrow | Transparent | 1 | 0 | 1 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T2 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T3 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 4000 K | 39.9 | 150 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T4 wide | Transparent | 1 | 0 | 1 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T3 narrow | Transparent | 1 | 0 | 1 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T2 narrow | Transparent | 1 | 0 | 1 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T2 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T3 medium | Transparent | 1 | 0 | 1 |
| 6000 lm | 2200 K | 47.8 | 126 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T4 wide | Transparent | 1 | 0 | 2 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T3 narrow | Transparent | 2 | 0 | 1 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T2 narrow | Transparent | 2 | 0 | 2 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T2 medium | Transparent | 2 | 0 | 1 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T3 medium | Transparent | 1 | 0 | 2 |
| 7500 lm | 2700 K | 54.6 | 137 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T4 wide | Transparent | 1 | 0 | 2 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T3 narrow | Transparent | 2 | 0 | 1 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T2 narrow | Transparent | 2 | 0 | 2 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T2 medium | Transparent | 2 | 0 | 1 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T3 medium | Transparent | 1 | 0 | 2 |
| 7500 lm | 3000 K | 53.1 | 141 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T4 wide | Transparent | 1 | 0 | 2 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T3 narrow | Transparent | 2 | 0 | 1 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T2 narrow | Transparent | 2 | 0 | 2 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T2 medium | Transparent | 2 | 0 | 1 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T3 medium | Transparent | 1 | 0 | 2 |
| 7500 lm | 4000 K | 50.5 | 149 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T4 wide | Transparent | 1 | 0 | 2 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T5 square medium | Transparent | 3 | 0 | 1 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T1 short | Transparent | 2 | 0 | 2 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T3 narrow | Transparent | 2 | 0 | 1 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T2 narrow | Transparent | 2 | 0 | 2 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T2 medium | Transparent | 2 | 0 | 1 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T3 medium | Transparent | 1 | 0 | 2 |
| 7500 lm | 2200 K | 60.9 | 123 | 24 | T4 medium | Transparent | 1 | 0 | 1 |
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T5 square medium | Transparent | 3 | 0 | 1 |
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T1 short | Transparent | 3 | 0 | 2 |
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |

**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com**  **02/20/2026**

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.  **Page 7 of 8**

## Polis Suspended | Luminaire | Polis Suspended

| Luminous Flux | Nominal CCT | W | lm/W | n° led | Optic | Screen | BUG | | |
|---|---|---|---|---|---|---|---|---|---|
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T2 medium | Transparent | 2 | 0 | 1 |
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 9000 lm | 2700 K | 63.7 | 141 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T5 square medium | Transparent | 3 | 0 | 1 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T1 short | Transparent | 3 | 0 | 2 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T2 medium | Transparent | 2 | 0 | 1 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 9000 lm | 3000 K | 61.9 | 145 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T5 square medium | Transparent | 3 | 0 | 1 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T1 short | Transparent | 3 | 0 | 2 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T2 medium | Transparent | 2 | 0 | 1 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 9000 lm | 4000 K | 59 | 153 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T5 square medium | Transparent | 3 | 0 | 1 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T1 short | Transparent | 3 | 0 | 2 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T2 medium | Transparent | 2 | 0 | 1 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 9000 lm | 2200 K | 70.8 | 127 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T5 square medium | Transparent | 3 | 0 | 1 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T1 short | Transparent | 3 | 0 | 3 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T2 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 2700 K | 75.2 | 140 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T5 square medium | Transparent | 3 | 0 | 1 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T1 short | Transparent | 3 | 0 | 3 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T2 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 3000 K | 73.1 | 144 | 32 | T4 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T4 wide | Transparent | 2 | 0 | 2 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T5 square medium | Transparent | 3 | 0 | 1 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T1 short | Transparent | 3 | 0 | 3 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T3 narrow | Transparent | 2 | 0 | 2 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T2 narrow | Transparent | 2 | 0 | 2 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T2 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T3 medium | Transparent | 2 | 0 | 2 |
| 10500 lm | 4000 K | 69.7 | 151 | 32 | T4 medium | Transparent | 2 | 0 | 2 |

**Neri North America, 999 Brickell Ave., suite 1002, Miami, FL 33131 USA, neri.us@neri.biz, www.nerinorthamerica.com** **02/20/2026**
Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice. **Page 8 of 8**