
NERI

Project location:	Fixture type: Qty:
Project name:	Notes:

ALKES | POLE | STEEL | DIVERGING POLES FOR ROUNDABOUTS | MAX 1 LIGHT SOURCE

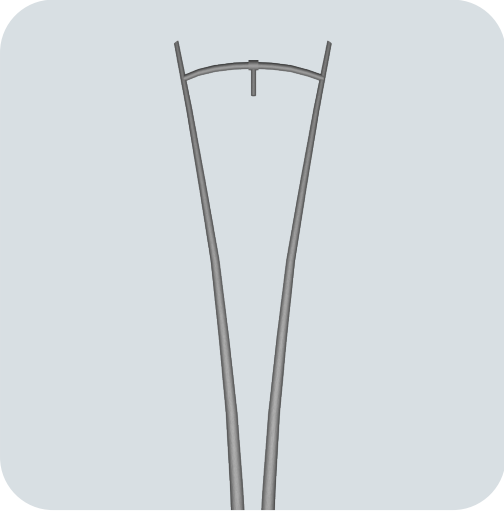

CE

ORDERING INFORMATION / GUIDE

Example**: AL0001202-N-BM-EPC-GG1-HC0802-ZD168060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BM Buried root	**EPC** Conical	**GG1** Suspended post top | Max 1 light source	**HC0802** 8020 mm	**ZD168060** Base 168 - Top 60 mm	**CN0** Grey [Neri] Textured
BF Flanged					

Generated code: **AL0001202 - N** - _ _ - _ _ _ - _ _ _ - _ _ _ _ _ _ - _ _ _ _ _ _ _ _ - _ _ _

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ALKES | POLE | STEEL | DIVERGING POLES FOR ROUNDABOUTS | MAX 1 LIGHT SOURCE

MECHANICAL CHARACTERISTICS

Lamp-post made of S275J steel, hot-rolled without welding, hot-galvanized in compliance with standard UNI EN ISO 1461. CE-certified pole, compliant with standard UNI EN 40-5.

Section: Base/Top 168/60 mm
Hatch size: 186x45 mm
Height under ground: 800 mm
Slot height below ground line for cable entry: 150x50 mm
Weight: 237.9-238.2 kg
Finish: Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.